

# 2132 2116

## MODELS

### Ideal for

- small ovens
- chillers
- sterilisers
- trace heating
- heat sealing

### Specifications

#### Dimensions:

Model 2132:  
48W x 24H x 103D mm  
Model 2116:  
48W x 48H x 103D mm

#### Control modes:

PID or On/Off

#### Supply voltages:

85-264Vac, 5.0watts max.  
20-29Vac or dc, 5.0watts  
maximum

#### Operating ambient:

0-55°C, 0-90%RH non-  
condensing

#### Inputs:

Nine standard  
thermocouple types.  
Pt100. 4-20mA linear.  
Custom input available

#### Output ratings:

Relay: 2A, 264Vac resistive  
Logic: 9Vdc, 18mA

#### Panel sealing:

IP65, plug-in from front  
panel



## PID Temperature Controllers

Available in compact 1/32 and 1/16 DIN panel sizes, the 2100 series uses advanced PID algorithms to give stable 'straight line' temperature control.

Self tuning is included to optimise the control performance without the need for specialist knowledge or training.

A **universal input** allows selection of nine internally stored thermocouple types and the Pt100 resistance thermometer. Other input linearisations may be factory downloaded. Linear inputs can be scaled to the desired display range.

Two **outputs** are configurable for heating, cooling or alarms.


**Three internal alarm setpoints** are provided, configurable as high, low or deviation alarms. Alarms can be 'blocked' on start-up to prevent unnecessary operator alerts.

**Heater failure** can be detected when the controller is used with a TE10S Solid State Relay.

**Tactile buttons** ensure positive operation.

**The operator interface** can be customised to present only those parameters that an operator needs to see and adjust, while all other parameters are locked away under password protection.

### Timer functionality

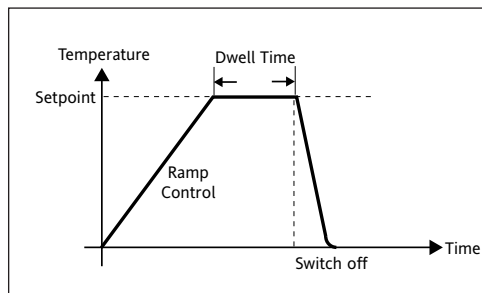



**EUROTHERM**

CONTROLS  
PROCESS AUTOMATION  
RECORDERS

# Rear terminal connections

Model 2132

Model 2116

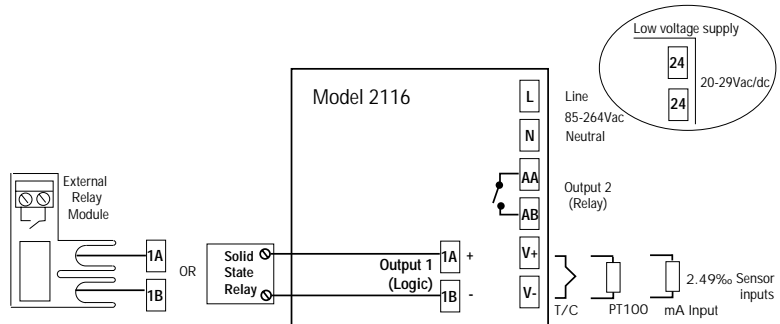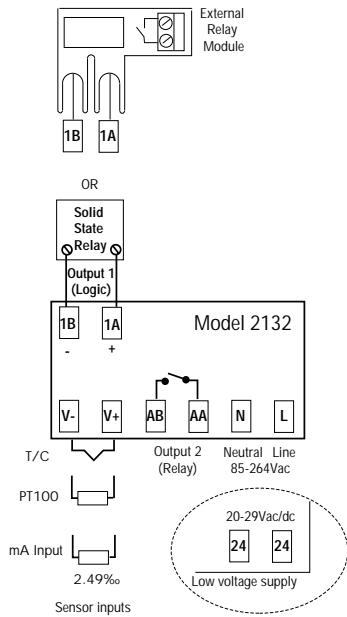

## Ordering codes

Model Number	Function	Supply Voltage	Manual	Output 1 (Logic)	Output 2 (Relay)	Sensor Input	Setpoint Min	Setpoint Max	Units	Ext. Relay Module	Input Adaptor
							note 2	note 2			

Model Number	Output 1 (Logic)	Output 2 (Relay)	Sensor Input	Setpoint Min	Setpoint Max
2132 48x24mm unit 2116 48x48mm unit	<b>XX</b> No function <b>Logic output</b> <b>LH</b> Heating <b>LC</b> Cooling <b>MT</b> PDS heater break detect (note 1) <b>FH</b> High alarm 1 <b>FL</b> Low alarm 1 <b>DB</b> Dev. band alarm 1 <b>DL</b> Dev. low alarm 1 <b>DH</b> Dev. high alarm 1 <b>NW</b> New alarm <b>Logic input</b> <b>AC</b> Alarm ack/reset <b>KL</b> Keylock <b>TM</b> Timer Off/On	<b>XX</b> No function <b>RH</b> Heating <b>RC</b> Cooling <b>FH</b> High alarm 2 <b>FL</b> Low alarm 2 <b>AL</b> High alarm 2 & low alarm 3 <b>DB</b> Dev. band alarm 2 <b>DL</b> Dev. low alarm 2 <b>DH</b> Dev. high alarm 2 <b>NW</b> New alarm	<b>Standard Sensor Inputs</b> <b>J</b> J Thermocouple <b>K</b> K Thermocouple <b>T</b> T Thermocouple <b>L</b> L Thermocouple <b>N</b> N Thermocouple-Nicrosil/Nisil <b>R</b> R Thermocouple-Pt/Pt13%Rh <b>S</b> S Thermocouple-Pt /Pt10%Rh <b>B</b> B Thermocouple-Pt/Pt30%Rh -6%Rh <b>P</b> Platinel II Thermocouple <b>Z</b> RTD/PT100 DIN 43760 <b>Factory Downloaded Input</b> <b>C</b> C Thermocouple - W5%Re/W26%Re (Hoskins) <b>D</b> D Thermocouple - W3%Re/W25%Re <b>E</b> E Thermocouple <b>1</b> Ni/Ni18%Mo Thermocouple <b>2</b> Pt20%Rh/Pt40%Rh Thermocouple <b>3</b> W/W26%Re (Engelhard) Thermocouple <b>4</b> W/W26%Re (Hoskins) Thermocouple <b>5</b> W5%Re/W26%Re (Engelhard) Thermocouple <b>6</b> W5%Re/W26%Re (Bucose) Thermocouple <b>7</b> Pt10%Rh/Pt40%Rh Thermocouple <b>8</b> Exergen K80 I.R. pyrometer <b>Process Inputs (Scaled to setpoint min and max)</b> <b>M</b> -9.99 to +80mV linear <b>Y</b> 0 to 20mA linear (note 3) <b>A</b> 4 to 20mA linear (note 3) <b>V</b> 0 to 10Vdc linear (Input adaptor required)	<b>Min °C</b> -210 -200 -200 -200 -200 -50 -50 0 0 -200 0 0 -200 0 0 10 0 200 -45 -1999 -1999 -1999 -1999	<b>Max °C</b> 1200 1372 400 900 1300 1768 1768 1820 1369 850 2319 2399 1000 1399 1870 2000 2010 2300 2000 1800 650 9999 9999 9999 9999

Note 1. PDS heater break detect will transmit the power demand to a TE10S Solid State Relay and read back a heater break alarm.

Note 2. Setpoint min and max : Include the decimal position required in the displayed value. Up to one for temperature inputs, up to two for process inputs.

Note 3. An external 1% current sense resistor is supplied as standard. If greater accuracy is required specify 'A1' in the Input Adaptor field.

### Example ordering code

2132-CC-VH-ENG-LH-RC-K-0-1000-C-XX-XX

2132, Controller, 85 to 264Vac, English manual, Logic heating, Relay cooling, Type K thermocouple, 0 to 1000°C, no options

### UK SALES OFFICE Eurotherm Ltd

Faraday Close Durrington Worthing BN13 3PL United Kingdom  
Sales and support: Tel. +44 (0)1903 695888 Fax +44 (0)1903 695666

Sales and support in over 30 countries worldwide

Enquiries/orders to:

Eurotherm Ltd Faraday Close Durrington

Worthing BN13 3PL United Kingdom

Tel. +44 (0)1903 268500 Fax +44 (0)1903 265982

Units
C Celsius
F Fahrenheit
K Kelvin
X Linear input

Ext. Relay Module
XX Not fitted
R7 Fitted (Operated by the logic output)

Input Adaptor
XX Not fitted
V1 0-10Vdc
A1 0-20mA or 4-20mA 0.1% current sense resistor (2.49Ω)

EUROTHERM LIMITED  
<http://www.eurotherm.co.uk>

Part No. HA027217 Iss. 1  
© Copyright Eurotherm Limited 2000

