DATASHEET - DG1-34031FB-C54C



Variable frequency drive, 400 V AC, 3-phase, 31 A, 15 kW, IP54/NEMA12, Brake chopper, DC link choke



6

Part no. DG1-34031FB-C54C Catalog No. 9702-3101-00P Alternate Catalog DG1-34031FB-C54C

No.

EL-Nummer 4138098

Product reference (e.g. ULI		EL-Nummer (Norway)	4138098			
Port group reference log QUIL Up In 600 V AC 3-phases Output voltage with V _q Up V 400 V AC 3-phases Output voltage with V _q Up V 400 V AC 3-phases Mains voltage B090bt2) Up V 400 V AC 3-phases Mains voltage B090bt2) Up V 400 V AC 3-phases AR 100 Koverload Ip AC 301 V AC 3-phases AR 110 Koverload Ip AC 31 P AC 3-phases AR 110 Koverload Ip AC 31 P AC 3-phases AR 100 Koverload Ip AC 31 P AC 3-phases AR 100 Koverload Ip AC 31 P AC 3-phases AR 100 Koverload Ip AC 31 P AC 3-phases AR 100 Koverload Ip Ip AC 30 P AC 3-phases AR 100 Koverload Ip Ip Ip Ip AR 100 Koverload Ip Ip Ip Ip AR 101 Koverload Ip Ip Ip Ip AR 101 Koverload Ip Ip	Delivery program					
Return Variable	Product range					Variable frequency drives
Section Sect	Part group reference (e.g. DIL)					DG1
Mains valuage (5000Hz)	Rated operational voltage			U _e		480 V AC, 3-phase
Rated operational current At 199% overload At 199% overload At 199% overload At 199% overload Assigned motor rating Note 150 % Overload 110 % Ov	Output voltage with V_{e}			U ₂		480 V AC, 3-phase
At 10% overload Iq AU 31 At 10% overload Iq AB Bated operational oursent for a switching frequency of 1-12 Mkz and an ambient temperature of ±50 °C for a 150% overload and +40 °C for a 110% overload members temperature of ±50 °C for a 150% overload and +40 °C for a 110% overload members temperature of ±50 °C for a 150% overload and +40 °C for a 110% overload members with 1500 rpm ¹ at 50 Hz or 1800 min ¹ at 60 Hz o	Mains voltage (50/60Hz)			U_{LN}	V	380 (-15%) - 500 (+10%)
At 110% overload I A 38 Based operational current for a switching frequency of 1 - 12 kHz and an ambient towner of the componenture of 4-50 th Coff or 3 150% overload and 440 °C for a 110% overload and 450 °C for a 150 °C overload and 450 °C for a 110% overload and 450 °C for a 150 °C overload and 450 °C for a 110% overload and 450 °C for a 150 °C °C for	Rated operational current					
Note Rated operational current for a switching frequency of 1 - 12 kHz and an ambient temporature of 1.90° C for a 150% overload and 440° C for a 110% overload Assigned motor rating For normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm² at 50 Hz or 1800 min² at 60 Hz Note Overload cycle for 68 s every 600 s 150 % Overload P kW 15 150 % Overload P kW 15 Note P kW 15 Note 3 3 150 % Overload P kW 35 Note P kW 25 150 % Overload P HP 25 150 % Overload <td>At 150% overload</td> <td></td> <td></td> <td>I_e</td> <td>Α</td> <td>31</td>	At 150% overload			I _e	Α	31
Assigned motor rating Imperature of +50 °C for a 150% overload and +40 °C for a 100% overload Note For normal internally and externally ventilated 4 pole, three phase asynchronous motors with 1500 rpm² at 50 Hz or 1800 min² at 60 Hz Note Overload cycle for 60 s overly 600 s Note Verload Verload Verload 110 % Overload P kW 15.5 110 % Overload P kW 29.3 110 % Overload P kW 29.3 Note P kW 29.3 110 % Overload P kW 29.5 110 % Overload P kW 29.5 110 % Overload P kW 29.5 110 % Overload P RW 29.5 110 % Overload P P 29.5 110 % Overload P P 20.5 110 % Overload P P 20.5 110 % Overload P P 20.5 110 % Overload P P 20.5 20.5 110 % Over	At 110% overload			I _e	Α	38
Note	Note					
Note and the south 1500 rpm 1 at 50 Hz or 1800 min	Assigned motor rating					
Note	Note					
150 % Overload	Note					Overload cycle for 60 s every 600 s
110 % Overload	Note					at 400 V, 50 Hz
150 % Overload I _M A 29.3 110 % Overload I _M A 36 Note at 500 V.50 Hz 150 % Overload P kW 18.5 110 % Overload P kW 22 150 % Overload I _M A 23 110 % Overload I _M A 33 34	150 % Overload			P	kW	15
110 % Overload	110 % Overload			Р	kW	18.5
Note at 500 V, 50 Hz 150 % Overload P kW 18.5 110 % Overload P kW 22 150 % Overload I _M A 28.9 110 % Overload I _M A 33 Note at 480 V, 60 Hz 4 150 % Overload P HP 20 110 % Overload I _M A 27 110 % Overload I _M A 34 Degree of Protection I _M A 34 Interface/field bus (built-in) Modbus TCP BACnet MS/TP BACNet MS/TP	150 % Overload			I _M	Α	29.3
150 % Overload P kW 12 110 % Overload I _M A 22 150 % Overload I _M A 28.9 110 % Overload I _M A 33 Note at 480 V, 60 Hz 150 % Overload P HP 20 110 % Overload P HP 25 150 % Overload I _M A 27 110 % Overload I _M A 27 154 / Modbus RTU Modbus TCP BACNET MS/TP Ethernet IP Interface/field bus (built-in) Modbus RTU Modbus TCP BACNET MS/TP Ethernet IP PROFIBUS CANopen® DeviceNet SmartWire-DT SmartWire-DT SmartWire-DT Additional PCB protection Ms/TP ethernet IP PROFIBUS CANopen® DeviceNet Additional PCB protection Multi-line graphic display Brake chooses Madio interference suppression filter Additional PCB protection Multi-line graphic display Brake chooses Modibus RTU Modbus TCP Brotection Multi-line graphic display Brake chooses Parameterization Reypad Fieldbus Power Xpert inControl Seypad Fieldbus Power Xpert inControl Reypad Fieldbus Power Xpert inControl	110 % Overload			I _M	Α	36
110 % Overload 150 % Overload 150 % Overload 110 % Overload 110 % Overload 150 %	Note					at 500 V, 50 Hz
In 50 % Overload In 60 verload In 70 verload In 80 verload In	150 % Overload			Р	kW	18.5
110 % Overload Note Note 150 % Overload P HP 20 110 % Overload P HP 25 150 % Overload In A 27 110 % Overload In A 34 Pegree of Protection Interface/field bus (built-in) Fieldbus connection (optional) Field with Parameterization Note A 33 A 44 P HP 20 A 27 I P54/NEMA12 I Rodbus RTU Modbus TCP BACnet MS/TP Ethernet IP BACnet MS/TP Ethernet IP Filed with A 34 A 34 B Modbus TCP BACnet MS/TP Ethernet IP B AC BIUS CANopen® DeviceNet SANOpen®				Р	kW	22
Note 150 % Overload 10 % Overload	150 % Overload			I _M	Α	28.9
150 % Overload P HP 25 150 % Overload I _M A 27 110 % Overload I _M A 34 100 Overload I _M A 34 Degree of Protection Interface/field bus (built-in) Modbus RTU Modbus RTU Modbus RTU P BACnet MS/TP Ethernet IP Fieldbus connection (optional) PROFIBUS CANopen® DeviceNet SmartWire-DT Fitted with Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	110 % Overload			IM	Α	33
110 % Overload P HP 25 150 % Overload I _M A 27 110 % Overload I _M A 34 Degree of Protection Interface/field bus (built-in) Modbus RTU Modbus RTU Modbus RTU P BACnet MS/TP Ethernet IP Fieldbus connection (optional) PRFIBUS CANopen® DeviceNet SmartWire-DT Fitted with Parameterization Representation R	Note					at 480 V, 60 Hz
150 % Overload 10 % Overload 110 % Overload				Р	HP	20
110 % Overload Interface/field bus (built-in) Interface/fiel				Р	HP	
Degree of Protection IP54/NEMA12 Interface/field bus (built-in) Modbus TU Modbus TU Modbus TCP BACnet MS/TP Ethernet IP Fieldbus connection (optional) PR0FIBUS CANopen® DeviceNet SmartWire-DT Fitted with Radio interference suppression filter Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	150 % Overload			I _M	Α	27
Interface/field bus (built-in) Modbus RTU Modbus TCP BACnet MS/TP Ethernet IP Fieldbus connection (optional) PROFIBUS CANopen® DeviceNet SmartWire-DT Fitted with Radio interference suppression filter Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	110 % Overload			I _M	Α	34
Modbus TCP BACnet MS/TP Ethernet IP Fieldbus connection (optional) PROFIBUS CANopen® DeviceNet SmartWire-DT Fitted with Radio interference suppression filter Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	Degree of Protection					IP54/NEMA12
CANopen® DeviceNet SmartWire-DT Fitted with Radio interference suppression filter Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	Interface/field bus (built-in)					Modbus TCP BACnet MS/TP
Additional PCB protection Multi-line graphic display Brake chopper DC link choke Parameterization Keypad Fieldbus Power Xpert inControl	Fieldbus connection (optional)					CANopen® DeviceNet
Fieldbus Power Xpert inControl	Fitted with					Additional PCB protection Multi-line graphic display Brake chopper
Frame size FS3	Parameterization					Fieldbus
	Frame size					FS3

Technical data General

delleral			
Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5
Certifications			CE, UL, cUL, c-Tick, UkrSEPRO, EAC
Production quality			RoHS, ISO 9001
Climatic proofing	ρ_{W}	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive
Air quality			3C2, 3S2
Ambient temperature			
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	+ 50
operation (110 % overload)	9	°C	-10 - +40
			Operation with 110 % overload (1 min./10 min.): -10 to +40 (max. +55 with 1% derating per Kelvin above limit) Operation with 150% overload (1 min./10 min.): -10 to +50 (max. +60 with 1% derating per Kelvin above limit) -20 with cold-weather mode
Storage	θ	°C	-40 - +70
Overvoltage category			III
Pollution degree			2
Radio interference level			
Radio interference class (EMC)			C1 (with external filter, for conducted emissions only), C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Environment (EMC)			1st and 2nd environments as per EN 61800-3
maximum motor cable length	I	m	C2 ≤ 10 m C3 ≤ 50 m
Mechanical shock resistance		g	EN 61800-5-1, EN 60068-2-27 UPS drop test (for weights inside the UPS frame) Storage and transportation: maximum 15 g, 11 ms (inside the packaging)
Vibration			EN 61800-5-1, EN 60068-2-6: 5 - 150 Hz Amplitude: 1 mm (peak) at 5 - 15.8 Hz Maximum acceleration amplitude: 1 g at 15.8 — 150 Hz
Mounting position			Vertical
Altitude		m	0 - 1000 m above sea level Above 1000 m: 1% derating for every 100 m max. 3000 m (2000 m for Corner Grounded TN Systems)
Degree of Protection			IP54/NEMA12
Protection against direct contact			BGV A3 (VBG4, finger- and back-of-hand proof)
Main circuit			
Supply			
Rated operational voltage	U _e		400 V AC, 3-phase 480 V AC, 3-phase 500 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V	380 (-15%) - 500 (+10%)
Input current (150% overload)	I _{LN}	Α	29
Input current (110% overload)	I _{LN}	Т	35.2
System configuration			TN-S, TN-C, TN-C-S, TT, IT
Supply frequency	f _{LN}	Hz	50/60
Frequency range	f _{LN}	Hz	45-66 (± 0%)
Mains switch-on frequency			Maximum of one time every 60 seconds
Mains current distortion	THD	%	32.6
Rated conditional short-circuit current	I _q	kA	< 100
Power section	ч		
Function			Variable frequency drive with internal DC link, DC link choke and IGBT inverter
Overload current (150% overload)	ار	Α	46.5
Overload current (110% overload)	ار	A	41.8
max. starting current (High Overload)	IH	%	200

Note about max. starting current			for 2 seconds every 20 seconds
Output voltage with V _e	U_2		400 V AC, 3-phase
	-		480 V AC, 3-phase
05			500 V AC, 3-phase
Output Frequency	f ₂	Hz	0 - 50/60 (max. 400)
Switching frequency	f _{PWM}	kHz	4 adjustable 1 - 12
Operation Mode			U/f control Speed control with slip compensation sensorless vector control (SLV) Torque regulation
Frequency resolution (setpoint value)	Δf	Hz	0.01
Rated operational current			
At 150% overload	Ie	Α	31
At 110% overload	I _e	Α	38
Note			Rated operational current for a switching frequency of 1 - 12 kHz and an ambient temperature of +50 °C for a 150% overload and +40 °C for a 110% overload
Motor current limit	ı	Α	0.1 - 2 x I _H (CT)
Power loss			
Heat dissipation at rated operational current I_e =150 %	P _V	W	361
Heat dissipation at rated operational current I_e =110%	P _V	W	471
Efficiency	η .	%	97.7
Maximum leakage current to ground (PE) without motor	I _{PE}	mA	12.2
Fan			temperature controlled Tool-less swapping
Internal fan delivery rate		m ³ /h	144
Fitted with			Radio interference suppression filter Additional PCB protection Multi-line graphic display
			Brake chopper DC link choke
Safety function			STO (Safe Torque Off, SIL1, PLc Cat 1)
Frame size			FS3
Motor feeder			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm ⁻¹ at 50 Hz or 1800 min ⁻¹ at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 400 V, 50 Hz
150 % Overload	Р	kW	15
110 % Overload	Р	kW	18.5
Note			at 500 V, 50 Hz
150 % Overload	P	kW	18.5
110 % Overload	P	kW	22
Note			at 480 V, 60 Hz
150 % Overload	P	НР	20
110 % Overload	P	НР	25
maximum permissible cable length	ı	m	screened: 150
Apparent power			
Apparent power at rated operation 400 V	S	kVA	26.3
Apparent power at rated operation 400 V Apparent power at rated operation 480 V	S	kVA	32.9
Braking function	J	NVA	UE.U
			may 20 % M
Standard braking torque			max. 30 % M _N
DC braking torque			adjustable to 150 %
Braking torque with external braking resistance			Max. 100% of rated operational current l _e with external braking resistor
minimum external braking resistance	R _{min}	Ω	14
Switch-on threshold for the braking transistor	U _{DC}	V	850 V DC
DC braking	%	I/I _e	≦ 150, adjustable
Control section			
External control voltage	U _c	V	24 V DC (max. 250 mA options incl.)

Reference voltage	U_s	V	10 V DC (max. 10 mA)
Analog inputs			2, parameterizable, 0 - 10 V DC, 2 - 10 V DC, -10 - +10 V DC, 0/4 - 20 mA
Analog outputs			2, parameterizable, 0 - 10 V, 0/4 - 20 mA
Digital inputs			8, parameterizable, max. 30 V DC
Digital outputs			1, parameterizable, 24 V DC
Relay outputs			3, parameterizable, 2 changeover contacts and 1 N/O, 6 A (240 VAC) / 6 A (24 VDC)
Interface/field bus (built-in)			Modbus RTU Modbus TCP BACnet MS/TP Ethernet IP
Expansion slots			2

Expansion slots		2
Assigned switching and protective elements		
Power Wiring		
Safety device (fuse or miniature circuit-breaker)		
IEC (Type B, gG), 150 %		PKZM0-32
IEC (Type B, gG), 110 %		PKZM4-40
UL (Class CC or J)	Α	50
Mains contactor		
150 % overload (CT/I _H , at 50 °C)		DILM17
110 % overload (VT/I $_{\rm L}$, at 40 °C)		DILM17
Main choke		
150 % overload (CT/I _H , at 50 °C)		Integrated DC link choke, uk = 5%
110 % overload (VT/I _L , at 40 °C)		Integrated DC link choke, uk = 5%
Radio interference suppression filter (external, 150 %)		DX-EMC34-042
Radio interference suppression filter (external, 110 %)		DX-EMC34-042
Radio interference suppression filter, low leakage currents (external, 150 $\%)$		DX-EMC34-042-L
Radio interference suppression filter, low leakage currents (external, 110 $\%)$		DX-EMC34-042-L
Note regarding radio interference suppression filter		Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments
DC link connection		
Braking resistance		
10 % duty factor (DF)		P:3 x DX-BR047-3K1
20 % duty factor (DF)		P:3 x DX-BR047-3K1
40 % duty factor (DF)		P:3 x DX-BR047-9K2
Notes concerning braking resistances:		P:n = "n" resistors connected in parallel
Motor feeder		
motor choke		
150 % overload (CT/I _H , at 50 °C)		DX-LM3-035
110 % overload (VT/I _L , at 40 °C)		DX-LM3-050
Sine filter		
150 % overload (CT/I _H , at 50 °C)		DX-SIN3-032
110 % overload (VT/I _L , at 40 °C)		DX-SIN3-048
All-pole sine filter		
150 % overload (CT/I _H , at 50 °C)		DX-SIN3-046-A
110 % overload (VT/I $_{L}$, at 40 °C)		DX-SIN3-046-A

Design verification as per IEC/EN 61439

3			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	31
Heat dissipation per pole, current-dependent	P _{vid}	W	0
Equipment heat dissipation, current-dependent	P _{vid}	W	471
Static heat dissipation, non-current-dependent	P_{vs}	W	24.12
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-10
Operating ambient temperature max.		°C	50
			Operation (with 150 % overload), allow for derating

IEC/EN 61439 design verification	
10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0


Technical data ETTIVI 7.0		
Low-voltage industrial components (EG000017) / Frequency converter =< 1 kV (E	C001857)	
Electric engineering, automation, process control engineering / Electrical drive	/ Static frequency converte	r / Static frequency converter = < 1 kV (ecl@ss10.0.1-27-02-31-01 [AKE177014])
Mains voltage	V	380 - 480
Mains frequency		50/60 Hz
Number of phases input		3
Number of phases output		3
Max. output frequency	Hz	400
Max. output voltage	V	480
Nominal output current I2N	Α	38
Max. output at quadratic load at rated output voltage	kW	18.5
Max. output at linear load at rated output voltage	kW	30
Relative symmetric net frequency tolerance	%	10
Relative symmetric net voltage tolerance	%	10
Number of analogue outputs		2
Number of analogue inputs		2
Number of digital outputs		1
Number of digital inputs		8
With control unit		Yes
Application in industrial area permitted		Yes
Application in domestic- and commercial area permitted		Yes
Supporting protocol for TCP/IP		Yes
Supporting protocol for PROFIBUS		Yes
Supporting protocol for CAN		Yes
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No

Supporting protocol for MODBUS		Yes
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		Yes
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		Yes
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for BACnet		Yes
Supporting protocol for other bus systems		Yes
Number of HW-interfaces industrial Ethernet		1
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		1
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces other		1
With optical interface		No
With PC connection		Yes
Integrated breaking resistance		Yes
4-quadrant operation possible		Yes
Type of converter		U converter
Degree of protection (IP)		IP54
Degree of protection (NEMA)		12
Height	mm	558
Width	mm	200
Depth	mm	252

Approvals

• •	
Product Standards	UL508C, CSA-C22.2 No. 274-13; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.	E134360
UL Category Control No.	NMMS, NMMS7
CSA File No.	UL report applies to both US and Canada
North America Certification	UL listed, certified by UL for use in Canada
Suitable for	Branch circuits
Max. Voltage Rating	3~500 V AC IEC: TN-S UL/CSA: 'Y' (Solidly Grounded Wey)
Degree of Protection	IP54/NEMA12

Dimensions

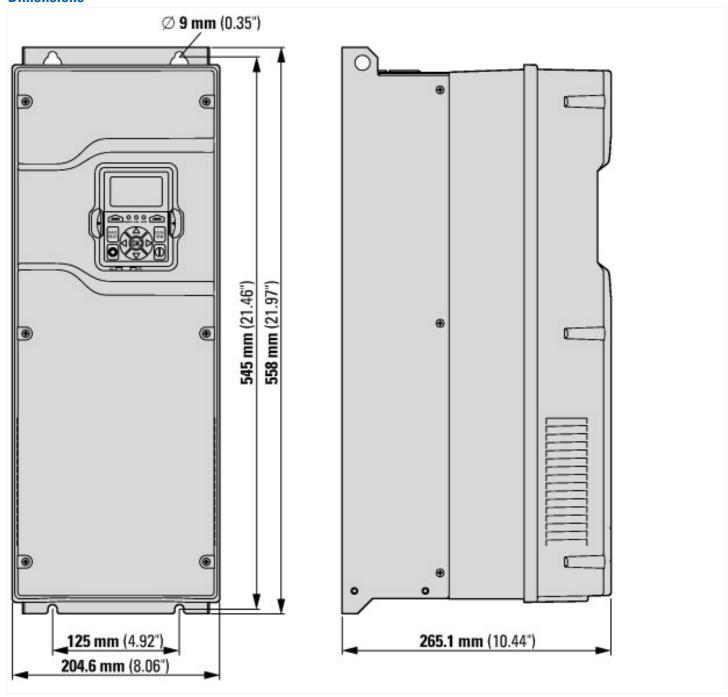

Additional product information (links)

Documentation	http://www.eaton.eu/Europe/Electrical/ProductsServices/AutomationControl/ SwitchingProtectingDrivingMotors/PowerXLfrequencydrives/DG1GeneralPurposeDrives/index.htm? wtredirect=www.eaton.eu/dg1#tabs-7
Manuals	http://www.eaton.eu/Europe/Electrical/ProductsServices/AutomationControl/SwitchingProtectingDrivingMotors/PowerXLfrequencydrives/DG1GeneralPurposeDrives/index.htm?wtredirect=www.eaton.eu/dg1#tabs-8