

# DDR4 SDRAM UDIMM

## Addendum

### MTA4ATF1G64AZ – 8GB


### Introduction

Information provided here is in addition to or supersedes information provided in the Micron DDR4 UDIMM Core data sheet.

### Features

- DDR4 functionality and operations supported as defined in the component data sheet
- Features and specifications supported in the Micron DDR4 UDIMM core data sheet
- 288-pin, unbuffered dual in-line memory module (UDIMM)
- Fast data transfer rate: PC4-3200, PC4-2666
- 8GB (1 Gig x 64)
- Data bus inversion (DBI) for data bus
- Single-rank
- On-board I<sup>2</sup>C serial presence-detect (SPD) EEPROM
- 8 internal banks; 2 groups of 4 banks each

**Figure 1: 288-Pin UDIMM (MO-309 R/C C0)**

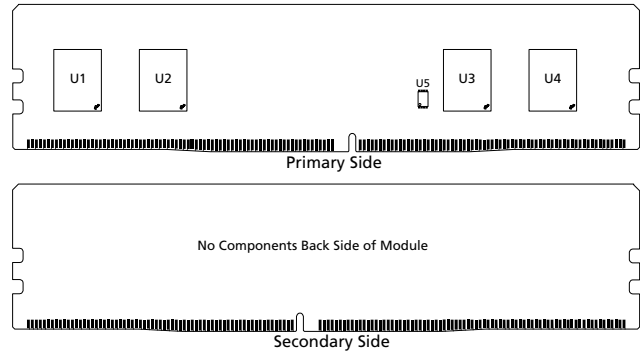

### Options

- Operating temperature
  - Commercial (0°C ≤ T<sub>OPER</sub> ≤ 95°C)
- Package
  - 288-pin DIMM (halogen-free)
- Frequency/CAS latency
  - 0.625ns @ CL = 22 (DDR4-3200)
  - 0.75ns @ CL = 19 (DDR4-2666)

### Marking

None  
Z  
-3G2  
-2G6

**Table 1: Addressing**

Parameter	8GB
Row address	128K A[16:0]
Column address	1K A[9:0]
Device bank group address	2 BG0
Device bank address per group	4 BA[1:0]
Device configuration	16Gb (1 Gig x 16), 8 banks
Module rank address	CS0_n

**Table 2: Part Numbers and Timing Parameters – 8GB Modules**

Base device: MT40A1G16,<sup>1</sup> 16Gb DDR4 SDRAM

Part Number <sup>2</sup>	Module Density	Configuration	Module Bandwidth	Memory Clock/ Data Rate	Clock Cycles (CL <sub>-n</sub> RCD <sub>-n</sub> RP)
MTA4ATF1G64AZ-3G2__	8GB	1 Gig x 64	25.6 GB/s	0.625ns/3200 MT/s	22-22-22
MTA4ATF1G64AZ-2G6__	8GB	1 Gig x 64	21.3 GB/s	0.75ns/2666 MT/s	19-19-19

- Notes:
1. The data sheet for the base device can be found on [micron.com](http://micron.com).
  2. All part numbers end with a two-place code (not shown) that designates component and PCB revisions. Consult factory for current revision codes. Example: MTA4ATF1G64AZ-3G2B1.

## Important Notes and Warnings

Micron Technology, Inc. ("Micron") reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions. This document supersedes and replaces all information supplied prior to the publication hereof. You may not rely on any information set forth in this document if you obtain the product described herein from any unauthorized distributor or other source not authorized by Micron.

**Automotive Applications.** Products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets. Distributor and customer/distributor shall assume the sole risk and liability for and shall indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting directly or indirectly from any use of non-automotive-grade products in automotive applications. Customer/distributor shall ensure that the terms and conditions of sale between customer/distributor and any customer of distributor/customer (1) state that Micron products are not designed or intended for use in automotive applications unless specifically designated by Micron as automotive-grade by their respective data sheets and (2) require such customer of distributor/customer to indemnify and hold Micron harmless against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, death, or property damage resulting from any use of non-automotive-grade products in automotive applications.

**Critical Applications.** Products are not authorized for use in applications in which failure of the Micron component could result, directly or indirectly in death, personal injury, or severe property or environmental damage ("Critical Applications"). Customer must protect against death, personal injury, and severe property and environmental damage by incorporating safety design measures into customer's applications to ensure that failure of the Micron component will not result in such harms. Should customer or distributor purchase, use, or sell any Micron component for any critical application, customer and distributor shall indemnify and hold harmless Micron and its subsidiaries, subcontractors, and affiliates and the directors, officers, and employees of each against all claims, costs, damages, and expenses and reasonable attorneys' fees arising out of, directly or indirectly, any claim of product liability, personal injury, or death arising in any way out of such critical application, whether or not Micron or its subsidiaries, subcontractors, or affiliates were negligent in the design, manufacture, or warning of the Micron product.

**Customer Responsibility.** Customers are responsible for the design, manufacture, and operation of their systems, applications, and products using Micron products. ALL SEMICONDUCTOR PRODUCTS HAVE INHERENT FAILURE RATES AND LIMITED USEFUL LIVES. IT IS THE CUSTOMER'S SOLE RESPONSIBILITY TO DETERMINE WHETHER THE MICRON PRODUCT IS SUITABLE AND FIT FOR THE CUSTOMER'S SYSTEM, APPLICATION, OR PRODUCT. Customers must ensure that adequate design, manufacturing, and operating safeguards are included in customer's applications and products to eliminate the risk that personal injury, death, or severe property or environmental damages will result from failure of any semiconductor component.

**Limited Warranty.** In no event shall Micron be liable for any indirect, incidental, punitive, special or consequential damages (including without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort, warranty, breach of contract or other legal theory, unless explicitly stated in a written agreement executed by Micron's duly authorized representative.



## DQ Map

Table 3: Component-to-Module DQ Map

Component Reference Number	Component DQ	Module DQ	Module Pin Number	Component Reference Number	Component DQ	Module DQ	Module Pin Number
U1	00	3	157	U2	00	19	179
	01	1	150		01	17	172
	02	2	12		02	18	34
	03	0	5		03	16	27
	04	7	155		04	23	177
	05	5	148		05	21	170
	06	6	10		06	22	32
	07	4	3		07	20	25
	08	11	168		08	27	190
	09	8	16		09	24	38
	10	10	23		10	26	45
	11	9	161		11	25	183
	12	14	21		12	30	43
	13	13	159		13	29	181
	14	15	166		14	31	188
	15	12	14	15	28	36	
U3	00	35	249	U4	00	51	271
	01	33	242		01	49	264
	02	34	104		02	50	126
	03	32	97		03	48	119
	04	39	247		04	55	269
	05	37	240		05	53	262
	06	38	102		06	54	124
	07	36	95		07	52	117
	08	43	260		08	59	282
	09	40	108		09	56	130
	10	42	115		10	58	137
	11	41	253		11	57	275
	12	46	113		12	62	135
	13	45	251		13	61	273
	14	47	257		14	63	280
	15	44	106	15	60	128	

## I<sub>DD</sub> Specifications

**Table 4: DDR4 I<sub>DD</sub> Specifications and Conditions (0° ≤ T<sub>C</sub> ≤ 85°) – 8GB (Die Revision E)**

Values are for the MT40A1G16 DDR4 SDRAM only and are computed from values specified in the 16Gb (1 Gig x 16) component data sheet

Parameter	Symbol	3200	2666	Units
One bank ACTIVATE-PRECHARGE current	I <sub>DD0</sub>	280	272	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I <sub>pp</sub> current	I <sub>PP0</sub>	16	16	mA
One bank ACTIVATE-READ-PRECHARGE current	I <sub>DD1</sub>	336	328	mA
Precharge standby current	I <sub>DD2N</sub>	180	172	mA
Precharge standby ODT current	I <sub>DD2NT</sub>	232	224	mA
Precharge power-down current	I <sub>DD2P</sub>	152	152	mA
Precharge quiet standby current	I <sub>DD2Q</sub>	168	168	mA
Active standby current	I <sub>DD3N</sub>	248	240	mA
Active standby I <sub>pp</sub> current	I <sub>PP3N</sub>	8	8	mA
Active power-down current	I <sub>DD3P</sub>	204	196	mA
Burst read current	I <sub>DD4R</sub>	1196	1052	mA
Burst write current	I <sub>DD4W</sub>	944	852	mA
Burst refresh current (1x REF)	I <sub>DD5R</sub>	272	272	mA
Burst refresh I <sub>pp</sub> current (1x REF)	I <sub>PP5R</sub>	16	16	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I <sub>DD6N</sub>	212	212	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I <sub>DD6E</sub>	452	452	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I <sub>DD6R</sub>	80	80	mA
Auto self refresh current (25°C)	I <sub>DD6A</sub>	44	44	mA
Auto self refresh current (45°C)	I <sub>DD6A</sub>	80	80	mA
Auto self refresh current (75°C)	I <sub>DD6A</sub>	204	204	mA
Auto self refresh current (95°C)	I <sub>DD6A</sub>	452	452	mA
Auto self refresh I <sub>pp</sub> current	I <sub>PP6X</sub>	24	24	mA
Bank interleave read current	I <sub>DD7</sub>	980	944	mA
Bank interleave read I <sub>pp</sub> current	I <sub>PP7</sub>	36	36	mA
Maximum power-down current	I <sub>DD8</sub>	144	144	mA

Note: 1. When T<sub>C</sub> > 85°C, the I<sub>DD</sub> and I<sub>pp</sub> values must be derated. Refer to the base device data sheet I<sub>DD</sub> and I<sub>pp</sub> specification tables for derating values for the applicable die-revision.

**Table 5: DDR4 I<sub>DD</sub> Specifications and Conditions (0° ≤ T<sub>C</sub> ≤ 85°) – 8GB (Die Revision B)**


Values are for the MT40A1G16 DDR4 SDRAM only and are computed from values specified in the 16Gb (1 Gig x 16) component data sheet

Parameter	Symbol	3200	2666	Units
One bank ACTIVATE-PRECHARGE current	I <sub>DD0</sub>	312	304	mA
One bank ACTIVATE-PRECHARGE, Word Line Boost, I <sub>PP</sub> current	I <sub>PP0</sub>	20	20	mA
One bank ACTIVATE-READ-PRECHARGE current	I <sub>DD1</sub>	396	388	mA
Precharge standby current	I <sub>DD2N</sub>	208	200	mA
Precharge standby ODT current	I <sub>DD2NT</sub>	260	252	mA
Precharge power-down current	I <sub>DD2P</sub>	172	172	mA
Precharge quiet standby current	I <sub>DD2Q</sub>	188	188	mA
Active standby current	I <sub>DD3N</sub>	324	316	mA
Active standby I <sub>PP</sub> current	I <sub>PP3N</sub>	12	12	mA
Active power-down current	I <sub>DD3P</sub>	288	280	mA
Burst read current	I <sub>DD4R</sub>	1304	1136	mA
Burst write current	I <sub>DD4W</sub>	1096	960	mA
Burst refresh current (1x REF)	I <sub>DD5R</sub>	316	308	mA
Burst refresh I <sub>PP</sub> current (1x REF)	I <sub>PP5R</sub>	20	20	mA
Self refresh current: Normal temperature range (0°C to 85°C)	I <sub>DD6N</sub>	268	268	mA
Self refresh current: Extended temperature range (0°C to 95°C)	I <sub>DD6E</sub>	484	484	mA
Self refresh current: Reduced temperature range (0°C to 45°C)	I <sub>DD6R</sub>	116	116	mA
Auto self refresh current (25°C)	I <sub>DD6A</sub>	40	40	mA
Auto self refresh current (45°C)	I <sub>DD6A</sub>	116	116	mA
Auto self refresh current (75°C)	I <sub>DD6A</sub>	244	244	mA
Auto self refresh current (95°C)	I <sub>DD6A</sub>	484	484	mA
Auto self refresh I <sub>PP</sub> current	I <sub>PP6X</sub>	44	44	mA
Bank interleave read current	I <sub>DD7</sub>	1072	1040	mA
Bank interleave read I <sub>PP</sub> current	I <sub>PP7</sub>	44	44	mA
Maximum power-down current	I <sub>DD8</sub>	160	160	mA

Note: 1. When T<sub>C</sub> > 85°C, the I<sub>DD</sub> and I<sub>PP</sub> values must be derated. Refer to the base device data sheet I<sub>DD</sub> and I<sub>PP</sub> specification tables for derating values for the applicable die-revision.

## Functional Block Diagram

Figure 2: Functional Block Diagram

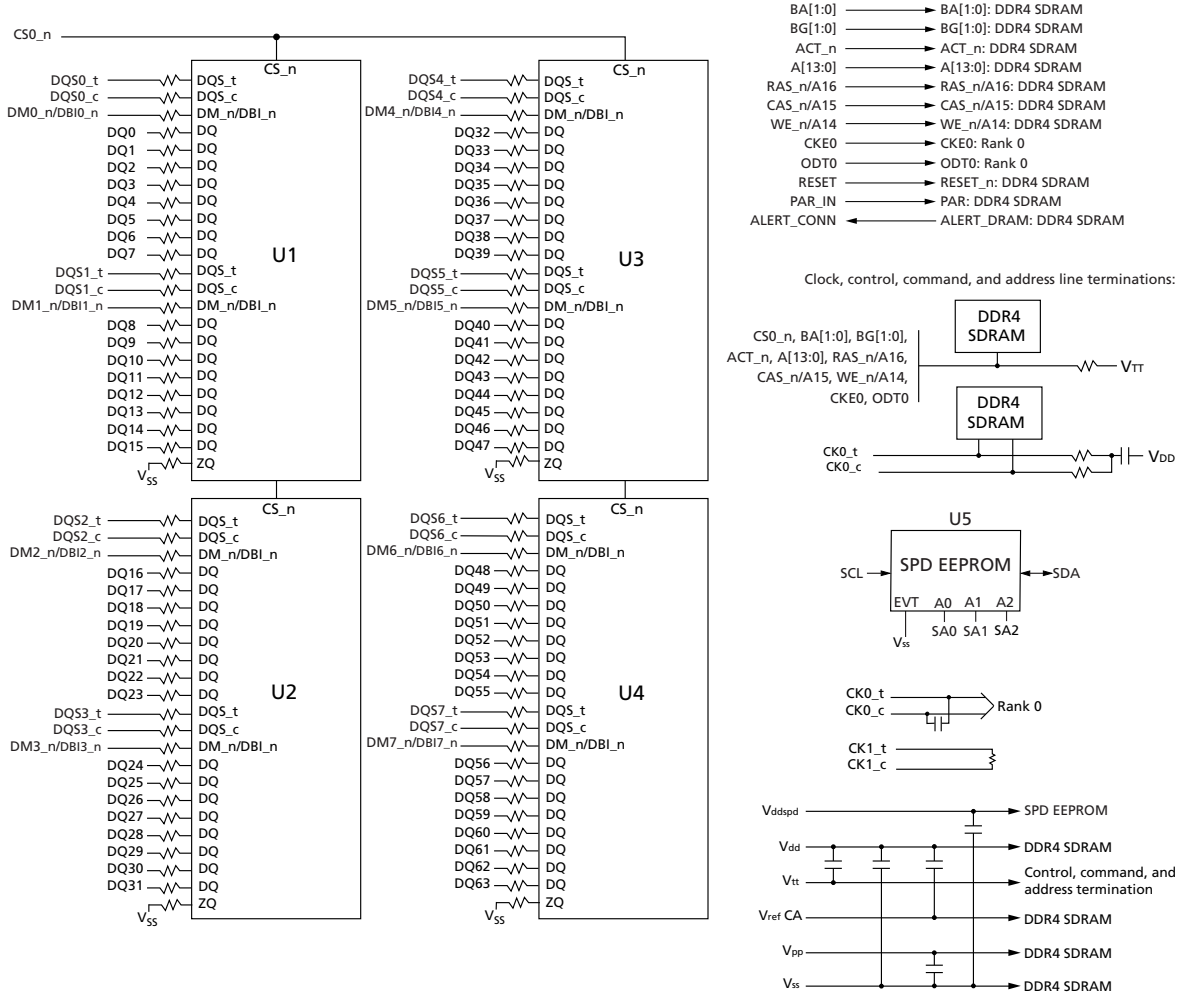

Note: 1. The ZQ ball on each DDR4 component is connected to an external  $240\Omega \pm 1\%$  resistor that is tied to ground. It is used for the calibration of the component's ODT and output driver.

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-4000  
[www.micron.com/products/support](http://www.micron.com/products/support) Sales inquiries: 800-932-4992  
 Micron and the Micron logo are trademarks of Micron Technology, Inc.  
 All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.