Brushless DC Fan - Ball Bearing 24V DC, 120mm x 120mm x 38mm multicomp PRO

RoHS Compliant

Characteristics

Motor Design Insulation Resistance Dielectric Strength Motor Protection Noise Level

Input Power, Current & Speed Tolerance Air Performance

- : 2 phases, 4-poles Brushless DC motor.
- : More than 10M Ω between internal stator and lead wire(+) measured at DC 500V.
- : Applied AC 500V for one minute or AC 600V for 2 seconds between housing and lead wire(+)
- : Thermal protected.
- : Measured in a semi-anechoic chamber with background noise level below 15 dB(A). The fan is running in free air with the microphone at a distance of one meter from the fan intake. from the fan intake.
- : Measured after continuous 10 minute operation at rated voltage in clean air, and at ambient temperature of 25°C
- : ±15% on rated power and current.

released

Polarity Protection

: Measured by a double chamber. The values are recorded when the fan speed has stabilized at rated voltage.

Specification


| Rated Voltage | : 24V DC |
|-------------------------|--|
| Operating Voltage Range | : 10V DC to 27.6V DC |
| | |
| Starting Voltage | : 10V DC (25°C Power ON/OFF) |
| Rated Speed | : 4200 RPM ± 10% |
| Air Delivery | : 190 CFM |
| Static Pressure | : 0.65 Inch-H2O |
| Rated Current | : 760 mA |
| Rated Power | : 18.2 Watts |
| Noise Level | : 54 dB(A) |
| Direction of Rotation | : Counter-clockwise viewed from front of fan blade |
| Operating Temperature | : -10°C to +70°C |
| Storage Temperature | : -40°C to +70°C |
| Bearing System | : Precision ball bearing system |
| Weight | : 330 g |
| Safety | : UL/CUR/ TUV/CE Approvals |
| Protection | : Automatic Restart Capability |
| | Note: In a situation where the fan is locked by an external force while the electricity is on, an |
| | increase in coil temperature will be prevented by temporarily turning off the electrical |
| | power to the motor. The fan will automatically restart when the locked rotor condition is |

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Brushless DC Fan - Ball Bearing 24V DC, 120mm x 120mm x 38mm multicomp PRO

Static Pressure

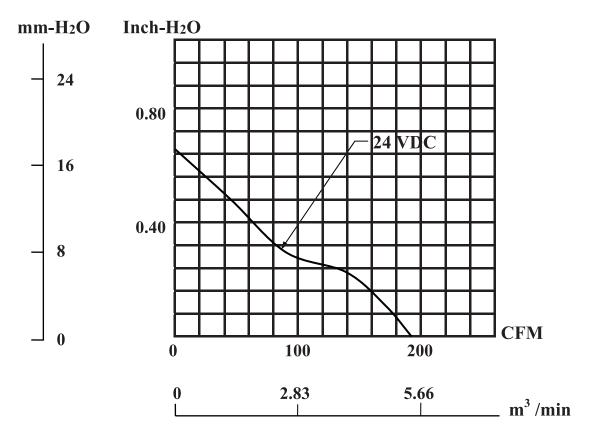

Material

| Frame | : Thermoplastic PBT of UL 94V-0 |
|-----------|---------------------------------|
| Impeller | : Thermoplastic PBT of UL 94V-0 |
| Lead Wire | : UL1007,24 awg,+RED;-BLACK |


Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



Brushless DC Fan - Ball Bearing 24V DC, 120mm x 120mm x 38mm

multicomp PRO

Dimensions

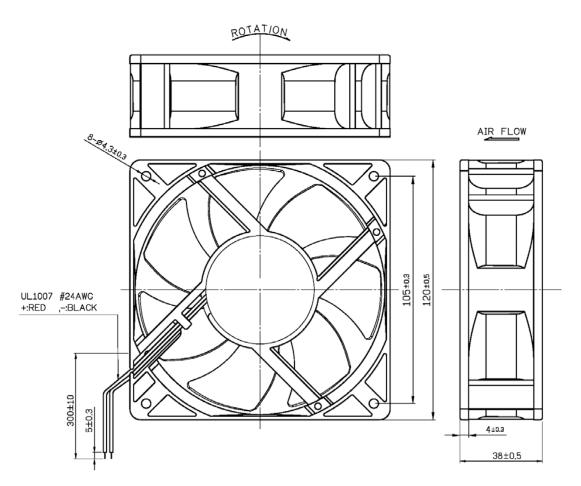

1. Air Flow Direction: Toward label side.

2. Best Mounting Direction: Any orientation.

Dimensions : Millimetres

Part Number Table

| Description | Part Number |
|--|-------------|
| - Bruchless DC Fen Bell Beering 241/ DC 120mm x 120mm x 28mm 2 Wire Loade | MP006492 |
| Brushless DC Fan - Ball Bearing, 24V DC, 120mm × 120mm × 38mm, 2 Wire Leads | MP006500 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

