
MTi-2

- Miniature form factor (12x12 mm)
- Easy integration
- Development Kit available

The MTi-2 is a self-contained Vertical Reference Unit (VRU) as a 12.1 x 12.1 mm module. The Xsens optimized strapdown algorithm (AttitudeEngineTM) performs high-speed dead-reckoning calculations at 1 kHz allowing accurate capture of high frequency motions. Xsens' industry-leading sensor fusion algorithm provides high accuracy and sensor auto-calibration in a cost-effective module for a wide range of (embedded) applications. It relieves users from the design, integration and maintenance of gyroscopes, accelerometers and other sensors. The MTi-2 is supported by the MT Software Suite which includes MT Manager (GUI for Windows/Linux), SDK, example codes and drivers for many platforms.

Sensor fusion performance

	benber rubien periormanee		
	Roll, Pitch	0.5 deg RMS	
	Yaw/Heading	unreferenced, low drift	
	Strapdown Integration (SDI)	Yes	
	Gyroscope		
	Standard full range	2000 deg/s	
	In-run bias stability	10 deg/h	
	Bandwidth (-3dB)	255 Hz	
	Noise Density	0.007 ⁰/s/√Hz	
	g-sensitivity (calibr.)	0.001 º/s/g	
	Accelerometer		
	Standard full range	16 g	
	In-run bias stability	30 µg	
	Bandwidth (-3dB)	324 (x,y) 262 (z) Hz	
	Noise Density	120 µg/√Hz	
Magnetometer			
	Standard full range	+/- 8 G	
	Total RMS noise	0.5 mG	
	Non-linearity	0.2%	
	Resolution	0.25 mG	
	GNSS Receiver		
	GNSS receiver interface	n/a	
	GNSS precision	n/a	
	RTCM input port	n/a	
	Barometer		
	Barometer interface	n/a	

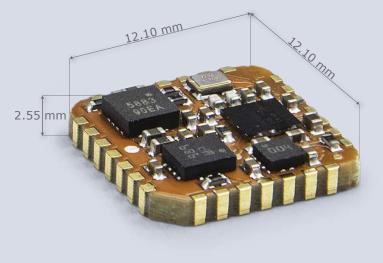

Mechanical		
IP-rating	IPOO	
Operating Temperature	-40 to 85 °C	
Casing material	PCB	
Mounting orientation	No restriction, full 360° in all axes	
Dimensions	12.1 x 12.1 x 2.55 mm	
Connector	SMD, footprint compatible with JEDEC PLCC-28	
Weight	0.6 g	
Electrical		
Input voltage	2.19 to 3.6V	
Power consumption (typ)	44 mW @ 3V	
Interfaces / IO		
Interfaces	UART, SPI, I ² C	
Sync Options	Yes	
Protocols	Xbus	
Clock drift	10 ppm	
Output Frequency	Up to 1 kHz, 100 Hz SDI	
Built-in-self test	Yes	
Software Suite		
GUI (Windows/Linux)	MT Manager Firmware updater,	
	Magnetic Field Mapper	
SDK (Example code)	C++, C#, python, Matlab, Nucleo, public source code	
Drivers	LabVIEW, ROS, GO	
Support	BASE by XSENS: online manuals,	
	community and knowledge base	

• 3D models available on request

• Available online via Digi-Key, Mouser, Farnell and local distributors



Unless stated otherwise, all specifications are typical. Specifications subject to change without notice.

© Xsens, March 2021