# G5RL-U/-K

PCB Power Relay

## Small-Size and Low-Back High Performance Latching Relay that Realizes a 16-A High Inrush Switching Current

- Creepage distance 8 mm between coil and contacts.
- 10 kV Impulse withstand voltage.
- Ambient Operating Temperature 85°C
- Suitable for TV-8 rating. (SPST-NO (1a))
- In-rush resistant and supports illumination load
- Compatible with capacitor load (IEC60669-1) (\*)
- Compatible with the International Safety Standard for Electrical/ Electronic Household Appliances (IEC60335-1) (\*)
  - \* G5RL-K1A-EL-HA type



Note. The actual product is marked differently form the image shown above.

#### **RoHS Compliant**

## ■Model Number Legend

 $\mathsf{G5RL} \text{-} \underline{\square} \underline{\square} \text{-} \underline{\square} \text{-} \underline{\square} \text{-} \underline{\square}$ 

## 1. Relay Function

U : Single-winding latching

K: Double-winding latching

#### 2. Number of poles

1 : 1-Pole

## 3. Contact Form

None: SPDT (1c)

A: SPST-NO (1a)

## 4. Classification

E : High-capacity

EL: In-rush resistance

## 5. Market Code

None: General purpose

HA: Home Appliance according

to IEC/EN60335-1

## ■Application Examples

- Housing equipment
- Building Automation
- UPS, FA equipment
- Electric power meter
- Illumination control
- Smart home

## **■**Ordering Information

				Single-winding latching		Double-winding latching		Minimum
Classification	on Terminal shape Contact form		Enclosure rating Model		Rated coil voltage	Model	Rated coil voltage	packing unit
High-capacity	Llink consoit.			G5RL-U1A-E	3 VDC 5 VDC 6 VDC	G5RL-K1A-E		
Tilgh-capacity	PCB terminals	SPDT (1c)	Flux protection	G5RL-U1-E	12 VDC 24 VDC	G5RL-K1-E	5 VDC 12 VDC 24 VDC	100 pcs/tray
In-rush resistance		SPST-NO (1a)				G5RL-K1A-EL-HA		

Note. When ordering, add the rated coil voltage to the model number.

Example: G5RL-U1A-E DC5

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

## **■**Ratings

#### ●Coil

### **Single-Winding Latching Type**

Rated voltage	Rated current (mA)	Coil resistance	Must set voltage	Must reset voltage	Max voltage	Power consumption	
	(IIIA)	(Ω)		% of rated voltage		(W)	
3 VDC	200	15					
5 VDC	120	41.7					
6 VDC	100	60	70% max.	70% max.	130%	Approx. 0.6	
12 VDC	50	240					
24 VDC	25	960					

### **Double-Winding Latching Type**

Rated Voltage	,	current A)	Coil resis	tance ( $\Omega$ )	Must set voltage	Must reset voltage	Max voltage	Power cor (V	nsumption V)
	Set coil	Reset coil	Set coil	Reset coil	9	% of rated voltag	Э	Set coil	Reset coil
5 VDC	15	50	33	3.3				Approx. 0	
12 VDC	62	1.5	19	92	70% max.	70% max.	130%	Дррго	x. 0.75
24 VDC	3	5	68	686				Approx	x. 0.84

Note. The rated current and resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

#### ●Contacts

Load		Resistive load	
Classification	High-capacity		In-rush resistance
Contact form	SPST-NO (1a) SPDT (1c)		SPST-NO (1a)
Contact type		Single	
Contact material		Ag Alloy (Cd free)	
Rated load	16 A at 250 VAC 16 A at 24 VDC	16 A at 250 VAC (NO) 5 A at 250 VAC (NC) 16 A at 24 VDC (NO) 5 A at 24 VDC (NC)	16 A at 250 VAC
Rated carry current	16 A	16 A (NO), 5A (NC)	16 A
Max. switching voltage	250 VAC,	24 VDC	250 VAC
Max. switching current	16 A	16 A (NO), 5 A (NC)	16 A

## **■**Characteristics

	Classification	High-capacity	In-rush resistance			
	Relay function	Single-winding latching, Double-winding latching	Double-winding latching			
Item	Contact form	SPST-NO (1a), SPDT (1c)	SPST-NO (1a)			
Contact resistance *1		$100$ m $\Omega$ max.				
Set time		10 ms max.				
Reset time		10 ms max.				
Minimum pulse width		30 ms				
Maximum pulse width	า *2	1 min				
Insulation resistance	*3	1,000 MΩ min.				
	Between coil and contacts	6,000 VAC, 50/60 Hz for 1 min				
Dielectric strength	Between contacts of the same polarity	1,000 VAC, 50/60 Hz for 1 min 1,250 VAC, 50/60 Hz for 1 min.				
Impulse withstand voltage Between coil and contacts		10 kV (1.2 × 50 μs)				
Insulation distance	Between coil and contacts	Clearance: 6.4 mm, Creepage: 8 mm	page: 8 mm			
	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)				
Vibration resistance	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) at set status 10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude) at reset status (Except SPST-NO)				
	Destruction	1,000 m/s <sup>2</sup>				
Shock resistance	Malfunction	150 m/s <sup>2</sup> at Set status				
		50 m/s² at Reset status (Except SPST-NO)				
Durability Mechanical *4		5,000,000 operations min.				
Electrical *4		50,000 operations min. 20,000 operations min.				
Ambient operating te	•	-40° to 85°C (with no icing or condensation)				
Ambient operating hu	ımidity	5% to 85%				
Weight		Approx. 10 g				

Note. Values in the above table are initial values.


- The contact resistance is measured with 1 A applied at 5 VDC using a fall-of-potential method.
- \*2. These are measured at a coil temperature of 23°C and rated coil voltage.
  - Pulse duty factor should be 10% MAX.
- The insulation resistance is measured between coil and contacts and between contacts of same polarity at 500 VDC.
- Operated with input pulse width "30 ms".

## **■**Engineering Data


# ●In-Rush Resistant Performance (IEC60669-1 Certified Switching Frequency) G5RL-K1A-EL-HA

Contact form	Operation coil rating	Contact ratings	Number of test operations
SPST-NO (1a)	5 to 24 VDC	IEC60669-1 16A 250VAC Capacitor 140 μF room temperature	20,000


# ●Maximum Switching Power High-Capacity



#### In-Rush Resistance




#### Ambient Temperature vs. Maximum Coil Voltage



Note. Maximum voltage of set pulse and reset pulse at duty factor 10%.

#### ●Malfunction Shock



Sample: G5RL-K1A-E 12VDC

No. of relays: 5 pcs

Test conditions: Shock is applied in ±X, ±Y, and ±Z directions three times each with set and reset status to check the number of contact malfunctions.


number of contact malfunctions. Standard value:50 m/s $^2$  with set status 100 m/s $^2$  with reset status

■Dimensions (Unit: mm)

#### G5RL-U1A-E **PCB Mounting Holes Terminal Arrangement/** (BOTTOM VIEW) **Internal Connections** \* Average value (BOTTOM VIEW) 29.0max 12.7max. Six, 1.3±0.1 dia (28.8)\* (12.5)\* 7.5±0.1 15.7max (15.5)\* -20+0.1· (2.3)-Note. Check carefully the coil polarity of the relay. □0.5 Note. Orientation marks are indicated as follows: [] -0.33 20








# \* Average value 12.7max (12.5)\* 15.7max (15.5)\*

\* Average value


15.7max (15.5)\*

## **PCB Mounting Holes**

# (BOTTOM VIEW)



#### **Terminal Arrangement/** Internal Connections (BOTTOM VIEW)




Note. Check carefully the coil polarity of the relay.


**Terminal Arrangement/** 

Internal Connections

Note. Orientation marks are indicated as follows: 🗒 🏻

#### G5RL-K1A-E



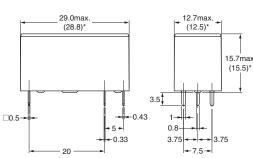

#### **PCB Mounting Holes** (BOTTOM VIEW)

-20±0.1


3.75±0.1 (2.3)




Note. Check carefully the coil polarity of the relay.

Note. Orientation marks are indicated as follows: [ ]


#### G5RL-K1A-EL-HA

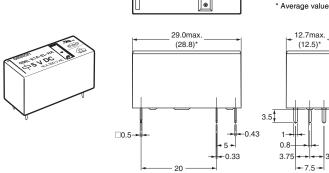

#### **PCB Mounting Holes** (BOTTOM VIEW)




#### **Terminal Arrangement/ Internal Connections** (BOTTOM VIEW)



Note. Check carefully the coil polarity of the relay.


Note. Orientation marks are indicated as follows: []

#### G5RL-K1-E

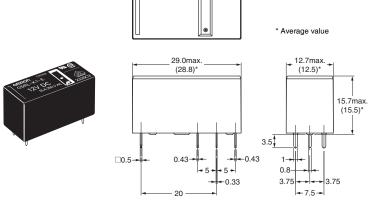


## **PCB Mounting Holes**

# (BOTTOM VIEW)



#### **Terminal Arrangement/ Internal Connections** (BOTTOM VIEW)



Note. Check carefully the coil polarity of the relay.

Note. Orientation marks are indicated as follows: []

## **■**Approved Standards

## • N UL Recognized (File No. E41643) and (File CSA Certified (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5RL-U1A-E G5RL-K1A-E		( "-U" models: 3 to 24 VDC)	16 A 277 VAC (Resistive) - NO 85°C	50,000
			TV-5 - NO 40°C	25,000
	SPST-NO (1a)		TV-8 - NO 40°C	25,000
			8 A 250 VAC (Ballast) - NO 40°C	6,000
			2,000 W 250 VAC (Tungsten) 70°C	6,000
			16 A 277 VAC (Resistive) - NO 85°C	50,000
G5RL-U1-E	CDDT (1 a)		8 A 250 VAC (Ballast) - NO 40°C	6,000
G5RL-K1-E	SPDT (1c)		2,000 W 250 VAC (Tungsten) - NO 40°C	6,000
			5 A 250 VAC (General) - NC 40°C	50,000

## ●c¶us UL/C-UL-approved models (File No. E41643)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5RL-K1A-EL-HA	SPST-NO (1a)	5 to 24 VDC	16 A 250 VAC (General) 85°C	6,000

## ● 🖄 VDE Certified (EN61810-1) (License No. 40007172)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5RL-U1A-E	CDCT NO (1a)	5 40 04 VDO	16 A 250 VAC (cosφ=1) - NO 85°C	30,000
G5RL-K1A-E	SPST-NO (1a)	5, 12, 24 VDC ("-U" models: 3, 5, 6, 12, 24 VDC)	240 VAC 100 A (0-P) Steady 10 A (rms) - NO 85°C	50,000
G5RL-U1-E	SPDT (1c)		16 A 250 VAC (cosφ=1) - NO 85°C	30,000
G5RL-K1-E	SPDT (TC)		5 A 250 VAC (cosφ=1) - NC 85°C	30,000
			16 A 250 VAC (cosφ=1) 85°C	6,000
G5RL-K1A-EL-HA	SPST-NO (1a)	5, 12, 24 VDC	IEC60669-1: 16 A 250 VAC Capacitor 140 μF room temperature	20,000

### ● Cac CQC Certified (File No. CQC21002283993)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5RL-K1A-EL-HA	SPST-NO (1a)	5 to 24 VDC	16 A 250 VAC (cosφ=1) 85°C	6,000


### **■**Precautions

## ●Please refer to "PCB Relays Common Precautions" for correct use.

### **Correct Use**

#### ●Basic Operation of Latching Relays


 In these relays, the input pulse of the set coil causes the operating condition to be maintained magnetically or mechanically, whereas the input pulse to the reset coil side puts the relay into the reset condition.



#### ◆Coil Temperature Rise of Long Time Continuous Current to the Coil

 When the coil is applied continuous current for a long time, the coil would be heated too much.

Please decide the coil Input pulse width by "heat and cold of coil temperature."



#### ●Wiring of High-Capacity Models (-E)

 High-capacity models (-E) have a structure that connects two terminals from one contact. When designing the circuit, use both terminals. If you use only one terminal, the relay may be unable to satisfy specified performance.

#### Precautions for Correct Use

- This product is not suitable for vehicles such as automobiles (including two-wheeled vehicles).
- If the product is used in the following applications, consult your OMRON sales representative to check the necessary items according to the specification sheets. Also make sure the product is used within the specified ratings and performance ranges with an ample margin and implement safety measures, such as designing a safety circuit, to minimize danger should the product fail.
  - a. Outdoor use, uses involving potential chemical contamination or electrical interference.
  - b. Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, safety equipment, and equipment that could present a risk to human life or body.
  - c. Equipment requiring a high level of reliability, such as gas, water, or electrical supply systems.

Please check each region's Terms & Conditions by region website.

## **OMRON Corporation**

**Electronic and Mechanical Components Company** 

## **Regional Contact**

Americas

https://www.components.omron.com/

Asia-Pacific

https://ecb.omron.com.sg/

Korea

https://www.omron-ecb.co.kr/

Europe

http://components.omron.eu/

China

https://www.ecb.omron.com.cn/

Japan

https://www.omron.co.jp/ecb/

© OMRON Corporation 2013-2021 All Rights Reserved. In the interest of product improvement, specifications are subject to change without notice.

Cat. No. K265-E1-08 0221(0913)