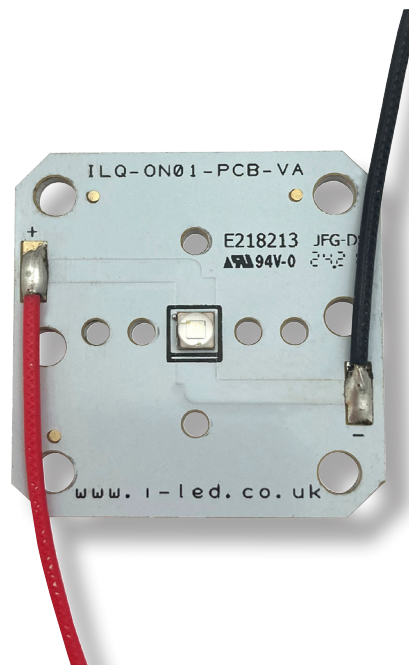




# OSLON® Signal 1 PowerCluster

ILQ-SG01-xxxx-SC221-WIR200.

At the heart of each PowerCluster is an OSLON® Signal Gen 2 UX:3 LED. OSLON® Signal can be driven up to 1200mA (Red 1000mA) while OSRAM's latest power chip technology remains efficient even at the highest drive currents. A low thermal resistance of 4.1K/W ensures cool running and a highly efficient product. PowerClusters are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.



## CONTENTS

Applications	<a href="#">page 2</a>	Secondary Optics Options	<a href="#">page 6</a>
Technical Features	<a href="#">page 2</a>	Heatsink Options	<a href="#">page 7</a>
Product Options	<a href="#">page 3</a>	Power Supply Options	<a href="#">page 8</a>
Minimum and Maximum Ratings	<a href="#">page 3</a>	Thermal Interface Material Options	<a href="#">page 8</a>
Accessories	<a href="#">page 4</a>	Assembly Information	<a href="#">page 9</a>
Technical Drawings	<a href="#">page 5</a>	Important Information and Precautions	<a href="#">page 9</a>
LED Radiation Diagram	<a href="#">page 5</a>	Safety Information	<a href="#">page 10</a>

## APPLICATIONS

- » Traffic signs
- » Rail signs
- » Warning lights
- » Emergency vehicle lighting
- » Airfield lighting
- » Runway lighting
- » Work lights
- » Factory automation lighting

## TECHNICAL FEATURES

<b>LED Family</b>	OSLON® Signal Gen 2
<b>Lifetime</b>	Up to 100,000 hour lifetime to 70% of original brightness
<b>Mounting</b>	Mounting holes using M3 screws allow easy installation
<b>Dimensions</b>	(L x W x H) 30 x 30 x 3.62mm
<b>Wiring</b>	Available with 200mm connecting wires
<b>Secondary Optics</b>	A secondary optic can be fitted. Suitable options on <a href="#">page 6</a> or visit <a href="#">our website</a> for a full range
<b>Heatsinks</b>	Required over 350mA. Suitable options on <a href="#">page 7</a> or visit <a href="#">our website</a> for a full range
<b>Power Supply</b>	4-75W dimming and non-dimming. Suitable options on <a href="#">page 8</a> or visit <a href="#">our website</a> for a full range
<b>Chain</b>	PowerClusters can be linked together to produce longer chains
<b>Current Range</b>	30 to 1200mA (Yellow, Blue, Verde Green, True Green and White) 30 to 1000mA (Red)
<b>Thermal Resistance</b>	4.1K/W

## PRODUCT OPTIONS

ILS Part Number	Colour	Dominat Wavelength or x/y Co-ordinate	Typical Power W § at 350mA	Forward Voltage	Flux † at 350mA	Radiance Angle	Relevant OSRAM LED Data
ILQ-SG01-SIBL-SC221-WIR200.	Signal Blue	475nm	1.01W	2.65-3.25V	18lm	110° (±55°)	LB CRBP.01
ILQ-SG01-SIVG-SC221-WIR200.	Signal Verde Green	505nm	1.0W	2.3-3.05	71lm	110° (±55°)	LV CRBP.01
ILQ-SG01-SITG-SC221-WIR200.	Signal True Green	528nm	0.93W	2.3-3.05V	97lm	110° (±55°)	LT CRBP.01
ILQ-SG01-SICY-SC221-WIR200.	Signal Converted Yellow	Cx 0.57 / Cy 0.42	1.0W	2.65-3.25V	97lm	110° (±55°)	LCY CRBP.01
ILQ-SG01-SIRE-SC221-WIR200.	Signal Red	625nm	0.75W	1.9-2.35V	61lm	110° (±55°)	LJ CRBP.01
ILQ-SG01-SOWH-SC221-WIR200.	Signal White	Cx 0.33 / Cy 0.34	1.02W	2.65-3.25V	130lm	110° (±55°)	LUW CRBP.01

Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect overall statistical figures, and do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data.

§ Tolerance +/- 10%

† Measured with 20mS 350mA pulse at 85 °C

## MINIMUM AND MAXIMUM RATINGS

ILS Part Number	Operating Temperature at Tc-Point [ ° C ]	Storage Temperature [ ° C ]	Forward Current per chip [mA]	Reverse Voltage [Vdc]
ILQ-SG01-SIBL-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1200mA	5V
ILQ-SG01-SIVG-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1200mA	5V
ILQ-SG01-SITG-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1200mA	5V
ILQ-SG01-SICY-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1200mA	5V
ILQ-SG01-SIRE-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1000mA	5V
ILQ-SG01-SOWH-SC221-WIR200.	-40 °C ~ 125 °C	-40 °C ~ 125 °C	30-1200mA	5V

Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.

Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.


## ACCESSORIES

### Secondary Optics Options



LEDiL precision-engineered lenses and reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL lenses and reflectors are released alongside the latest products from our LED suppliers. Suitable options on [page 6](#) or visit [our website](#) for a full range.

### Heatsinks



ILS has a series of aluminium alloy heatsinks to be used with our standard range of PowerStars and PowerClusters. These heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with thermal interface material (TIM) attached to the top surface. Suitable options on [page 7](#) or visit [our website](#) for full range.


### Power Supplies

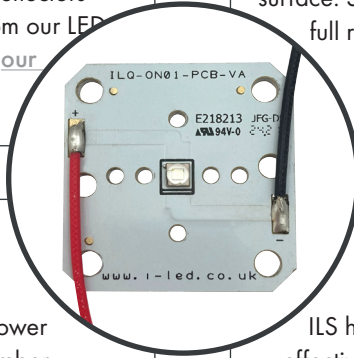ILS has a comprehensive range of standard power supplies. The table below shows the total number of ILS products each power supply can drive. Additional power supplies are being introduced so please call us or [check our website](#) for the latest offering. Suitable options on [page 8](#)



### Thermal Interface Material (TIM)


ILS has produced a range of high-performance, cost effective thermal interface materials to perfectly match their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the heatsink. ILS offers TIM in three options – double sided adhesive, single sided adhesive and non adhesive. Suitable options on [page 8](#) or visit [our website](#) for a full range.



# TECHNICAL DRAWINGS (MM)

Coming soon
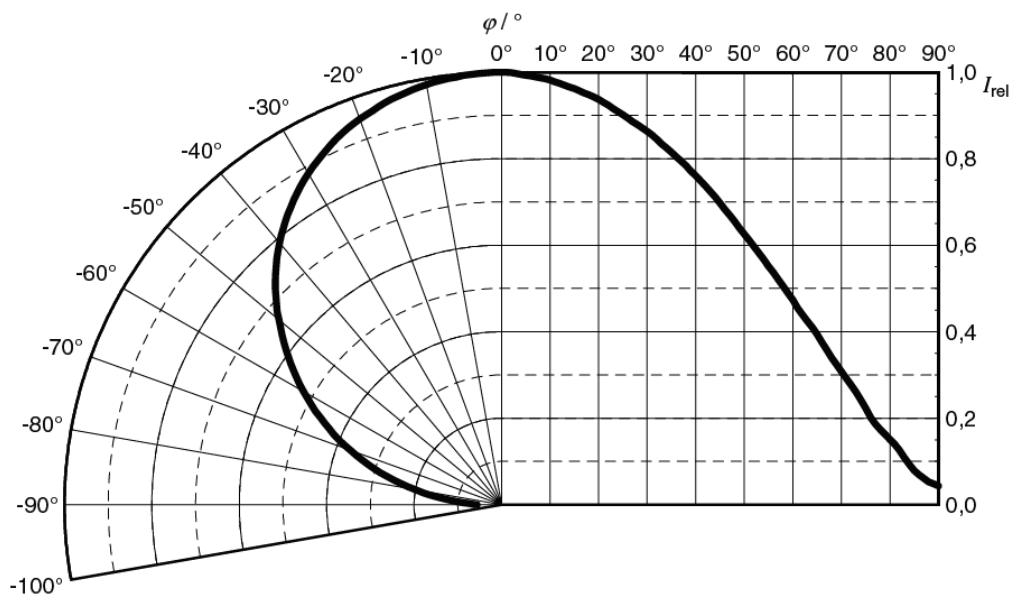
## RADIATION OF SINGLE LED





## SECONDARY OPTICS OPTIONS





Part Number	Beam	Size	Height	Family	FWHM	Material	Colour	Fastening
CA11265_HEIDI-M	Medium	2.16mm	11.9mm	Heidi	28°	PMMA	Clear	Tape/Pin
CA11267_HEIDI-O-90	Oval	2.16mm	11.9mm	Heidi	15+51°	PMMA	Clear	Tape/Pin
CA11268_HEIDI-W	Wide	2.16mm	11.9mm	Heidi	32°	PMMA	Clear	Tape/Pin
CA11266_HEIDI-O	Oval	2.16mm	11.9mm	Heidi	52°	PMMA	Clear	Tape/Pin
CA12242_HEIDI-SS	Smooth Spot	2.16mm	11.9mm	Heidi	17°	PMMA	Clear	Tape/Pin
CA11264_HEIDI-D	Diffused Spot	2.16mm	11.9mm	Heidi	13°	PMMA	Clear	Tape/Pin
CA11663_HEIDI-RS	Real Spot	2.16mm	11.9mm	Heidi	10°	PMMA	Clear	Tape/Pin
CA15359_EMILY-WW	Wide	21.6mm	11.9mm	Emily	44°	PMMA	Clear	Tape/Pin
FA11208_TINA-RS	Real Spot	16.1mm	9.5mm	Tina	14°	PMMA	Clear	Tape/Pin
FA11209_TINA-D	Diffused Spot	16.1mm	9.4mm	Tina	15°	PMMA	Clear	Tape/Pin
CA13546_EMILY-RS	Real Spot	26mm	14.7mm	Emily	11°	PMMA	Clear	Tape/Pin
CA11388_EMILY-M	Medium	26mm	14.9mm	Emily	18°	PMMA	Clear	Tape/Pin
CA12062_EMILY-D	Diffused Spot	26mm	14.9mm	Emily	9.9°	PMMA	Clear	Tape/Pin
CA11389_EMILY-O	Oval	26mm	14.9mm	Emily	45+90°	PMMA	Clear	Tape/Pin
CA12426_TINA3-W	Wide	16.1mm	6.9mm	Tina3	43°	PMMA	White	Tape/Pin
CA12377_TINA2-M	Medium	16mm	9.5mm	Tina2	29°	PMMA	Black	Tape/Pin
CA12079_HEIDI-W2	Wide	21.6mm	12mm	Heidi	43°	PMMA	Clear	Tape/Pin
CP12412_LOS-RS	Real Spot	21.6mm	14.3mm	Leila	9.8°	PMMA	White	Glue/Pin
CA12264_LR2-M	Medium	21.6mm	14.3mm	Leila	26°	PMMA	White	Glue/Pin
CA11837_LAURA-M-PIN	Medium	21.6mm	13.1mm	Laura	30°	PMMA	White	Tape/Pin
CA11959_LAURA-RS-PIN	Real Spot	21.6mm	13.1mm	Laura	9.5°	PMMA	White	Tape/Pin
CA11960_LAURA-D-PIN	Diffused Spot	21.6mm	13.1mm	Laura	12°	PMMA	White	Tape/Pin
CA12012_LAURA-O-PIN	Oval	21.6mm	13.1mm	Laura	62+11°	PMMA	White	Tape/Pin
CA12325_LAURA-WW-PIN	Wide	21.6mm	13.1mm	Laura	64°	PMMA	White	Tape/Pin
CA12344_LAURA-W-PIN	Wide	21.6mm	13.1mm	Laura	47°	PMMA	White	Tape/Pin
FP13028_LISA2-M-PIN	Medium	9.9mm	6.8mm	Lisa2	21°	PMMA	Black	Pin
FP13030_LISA2-M-CLIP	Medium	9.9mm	6.8mm	Lisa2	21°	PMMA	Black	Clip
FP16559_LISA3-M-PIN	Medium	10mm	7.9mm	Lisa3	26°	PMMA	Black	Pin
FP16560_LISA3-W-PIN	Wide	10mm	7.9mm	Lisa3	34°	PMMA	Black	Pin
FP16561_LISA3-WW-PIN	Wide	10mm	7.9mm	Lisa3	43°	PMMA	Black	Pin
FP13026_LISA2-WW-PIN	Wide	9.9mm	6.8mm	Lisa2	57°	PMMA	Black	Pin
FP16562_LISA3-WWW-PIN	Wide	10mm	7.9mm	Lisa3	61°	PMMA	Black	Pin
FP16558_LISA3-RS-PIN	Spot	10mm	7.9mm	Lisa3	19°	PMMA	Black	Pin
FP16563_LISA3-O-PIN	Oval	10mm	7.9mm	Lisa3	47+22°	PMMA	Black	Pin
FA11209_TINA-D	Diffused Spot	16.1mm	9.4mm	Tina	15°	PMMA	Clear	Tape/Pin
C17523_LISA4-W	Wide	10mm	7.7mm	LISA4	15°	PMMA	Clear	Pin
C17524_LISA4-WW	Wide	10mm	7.7mm	LISA4	45°	PMMA	Clear	Pin
C17525_LISA4-WWW	Wide	10mm	7.7mm	LISA4	60°	PMMA	Clear	Pin

[Click here to visit our website for our latest range](#)

## HEATSINK OPTIONS















ILS Product		350mA	700mA	1000mA
No Heatsink, in free air				
ILA-HSINK-78X46X25MM				
ILA-HSINK-70X70X55MM				

**KEY**

-  Operates under the recommended ILS junction temperature
-  Operates under the recommended LED maximum junction temperature
-  Not suitable for use
-  Heatsink not designed for use with this product

[Click here to visit our website for our latest range](#)

## POWER SUPPLY OPTIONS

Image	Driver Part Number	Rating Watts	Current	Output Volts	Dimming
	ILA-1CH-LED-TESTER-USB-01	5W	50-350mA	2-5V	No
	IZC035-004F-4065C-SAL	4W	350mA	3-12V	No
	IZC070-004F-4065C-SAL	4W	700mA	2-6V	No
	IZC035-008F-5065C-SA	8W	350mA	3-36V	No
	IZC070-008F-5065C-SA	8W	700mA	3-12V	No
	OTe 10/220...240/700 PC	10W	700mA	7-14V	Phase-cut
	OTi DALI 10/220...240/700 NFC I	10W	150-700mA	2.5-45V	DALI
	IZC035-017F-0067A-SA	17W	350mA	6-48V	No
	OTi QBM 20/220...240/500 NFC S	20W	200-500mA	20-50V	Bluetooth
	OTi QBM 40/220...240/1A0 NFC S	40W	500-1050mA	20-50V	Bluetooth
	IT-FIT-4/220-240/400-CS-I	4W	100-400mA	2.5-10V	No
	IT-FIT-7/220-240/700-CS-I	7W	350-700mA	2.5-11V	No
	IT-FIT-11/220-240/500-CS-I	11W	350-500mA	11-21V	No
	IT-FIT-15/220-240/700-CS-I	11W	550-700mA	11-21V	No

[Click here to visit our website for our latest range](#)

## THERMAL INTERFACE MATERIAL OPTIONS

Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
ILA-TIM-CLUSTER-30X30-0A	ILA-TIM-CLUSTER-30X30-1A	ILA-TIM-CLUSTER-30X30-2A

Other sizes are available, including customised parts

[Click here to visit our website for our latest range](#)



## ASSEMBLY INFORMATION

- » The mounting of the PowerCluster has to be on a metal heatsink.
- » In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

### IMPORTANT INFORMATION AND PRECAUTIONS



The PowerCluster's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the PowerCluster away from you and do not shine into the eyes of others.



PowerClusters, when operated, can reach high temperatures thus there is risk of injury if they are touched.



PowerClusters will overheat in operation if not attached to a suitable heatsink. Overheating can cause failure or irreparable damage.



DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.



Do not operate PowerClusters with a power supply with unlimited current. Connection to constant voltage power supplies that are not current limited may cause the PowerCluster to consume current above the specified maximum and cause failure or irreparable damage.



DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.

## SAFETY INFORMATION



The LED module itself and all its components must not be mechanically stressed.



Assembly must not damage or destroy conducting paths on the circuit board.



The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.



To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.



Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!



Pay attention to standard ESD precautions when installing the PowerClusters.



The PowerClusters, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.



For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.



To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.



The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this datasheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.

## FURTHER INFORMATION

The values contained in this datasheet can change due to technical innovation. Any such changes will be made without separate notification.

If you require further assistance or have a specific or custom enquiry, please contact the ILS team via email or phone. Alternatively please visit our website for more product information and to see our full ranges.



Unit 2, Berkshire Business Centre,  
Berkshire Drive, Thatcham,  
Berkshire, RG19 4EW  
+44 (0)1635 294606

[info@i-led.co.uk](mailto:info@i-led.co.uk)

<https://i-led.co.uk>

## ABOUT ILS

ILS offers a high level of technical skill, professionalism and commercial understanding to companies requiring market-leading optoelectronics solutions. Offering conceptual advice, electronics design and manufacturing capability, we use high quality production resources both in-house and in Asia, providing project support from prototyping to mass production. We also understand the need to provide cost-effective solutions and we do so using high quality components to ensure that the end product's reliability and quality is uncompromised. Apart from LEDs in the visible spectrum, we have a wide range of Infrared, UV LEDs, UV tubes, and lasers.

ILS is a division of Intelligent Group Solutions Ltd (IGS) a well-established respected industry leading optoelectronics solutions provider. Much of IGS' business comes from providing semi-custom or custom products both in component and sub-assembly form, and from providing design support and prototyping within the European market place. We can deliver production displays to wherever in the world that the customer's manufacturing or assembly is being undertaken.

## INTELLIGENT GROUP SOLUTIONS DIVISIONS

