




## Description

This video converter can convert the source signals of CVBS, VIDEO and S-VIDEO into VGA signal. With adoption of advanced video straight-through technology, the source signals of BNC, AV and S-VIDEO can be converted into progressive scanning vga signal without any data loss. What is more, the parameters of the program source such as brightness and contrast are adjustable. It supports plug-and-play, no driver program installation is needed.

## Features

- Supported conversion of video signal formats: from CVBS or S-VIDEO signal into frequency multiplication processed high-resolution VGA signal.
- Multiple input signal formats are supported: CVBS, S-VIDEO and VGA. Also automatic identification of the two colour systems i.e. PAL and NTSC is supported.
- Support output resolution(4:3 screen):  
800×600 @ 60/75Hz; 1024×768 @ 60Hz; 1280×1024 @ 60Hz; 1600×1200 @ 60Hz
- Support output resolution(16:9/16:10 screen):  
1280×720 @ 60Hz; 1366 × 768 @ 60Hz; 1440 × 900 @ 60Hz; 1600 × 900 @ 60Hz;  
1680×1050 @ 60Hz; 1920 × 1080 @ 60Hz; 1920 × 1200 @ 60Hz
- Adjustable brightness, contrast, colour saturation and hue.
- Current working status can be saved on accidental power-off.
- OSD caption prompts function for all operation and status.
- Dimensions: 105mm (max. length) × 65mm (max. width) × 27mm (max. Height).

## Ports Description

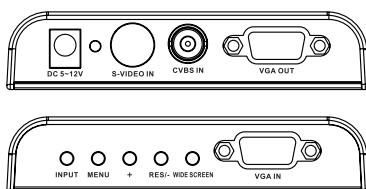

+ —  
DC5-12V

VGA OUT	to PC monitor
VGA IN	to PC graphic card
S-VIDEO IN	to DVD/VCD etc.
CVB-S IN	to monitor camera or video matrix
Power 5-12V	Support 5-12V wide voltage input

## Part Number Table

Description	Part Number
Composite to VGA Video Converter (Wide Screen Compatible), Black	82-10773

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.