Wall Plate Audio Amplifier with CSR Bluetooth v5.0

multicomp PRO

Features

- Bluetooth v5.0 with apt-X
- 24W class-D high quality power amplifier
- Compact size wall plate design
- Easy installation

Specifications

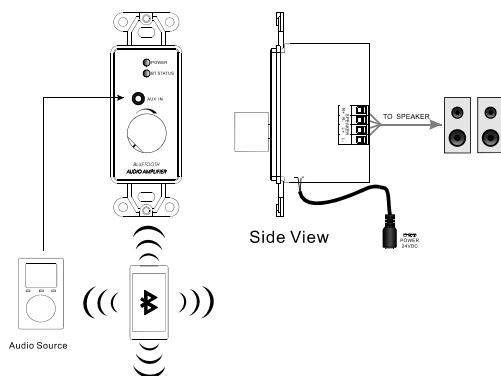|	
Audio Inputs	: Bluetooth Receiver or stereo audio line level
Bluetooth Version	: Bluetooth v5.0 compliant with apt-X
Bluetooth Receive Distance	: 50 Meters (open space)
Power Amplifier Type	: Stereo Class-D
Output power	: 24W(rms) per channel (@ RL=4 ohm)
THD+N	: 0.1% (@ RL=4Ω, f = 1kHz)
Min. Load Resistance	: 4Ω
Includes Speaker Protection circuit.	
Power Source	: 24V DC / 3A
3 min link-lost timeout function.	
Bluetooth automatically switch to pairing state if reconnecting fail.	
Audio priority	: BT > Aux In

Connect and Operate

Step 1: Install the unit in wall and connect power and speaker cables

Step 2: Turn on the rotary switch to power up

Step 3: BT status LED quick blinking in open paring mode, connect your BT devices to Music-BT and play

Step 4: For Aux-In source, plug-in audio cable and play. The unit will automatically switch between BT and Aux-In

Diagram

Side View

Audio Source

Part Number Table

Description	Part Number
Wall Plate Audio Amplifier with CSR Bluetooth v5.0	MP009005

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO