
PXle-2526

2022-06-30



Contents

PXIe-2526 Specifications.....	3
-------------------------------	---

PXle-2526 Specifications

This document lists specifications for the PXle-2526. All specifications are subject to change without notice.

Topology	1-wire 158×1 Multiplexer, 2-wire 79×1 Multiplexer
----------	---

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the expected performance met by a majority of the models.
- **Nominal** specifications describe parameters and attributes that may be useful in operation.

Conditions

Specifications are valid at 23 °C unless otherwise noted.

All voltages are specified in DC, AC_{pk}, or a combination unless otherwise specified.



Caution The protection provided by the PXle-2526 can be impaired if it is used in a manner not described in this document.

Input Characteristics

Maximum switching voltage

Channel-to-channel	150 V
Channel-to-ground	150 V, CAT O



Note This module is rated for Measurement Category I. It is intended to carry signal voltages no greater than 150 V. This module can withstand up to 800 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 VAC or 230 VAC. Refer to the **Read Me First: Safety and Electromagnetic Compatibility** document for more information about measurement categories.

Measurement Categories CAT I and CAT O (Other) are equivalent and are for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. This category is for measurement of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special hardware, limited-energy parts of hardware, circuits powered by regulated low-voltage sources, and electronics.



Caution When hazardous voltages ($>42.4 \text{ Vpk}/60 \text{ V DC}$) are present on any channel, safety low-voltage ($\leq 42.4 \text{ Vpk}/60 \text{ V DC}$) cannot be connected to any other channel.

Maximum switching power	60 W, 62.5 VA
-------------------------	---------------



Caution The switching power is limited by the maximum switching current, the maximum voltage, and must not exceed 60 W, 62.5 VA.

CH-COM DC isolation resistance	$>1 \text{ G}\Omega$, typical at 25 °C
Maximum current	

Switching	2 A (per channel)
Carry	2 A (per channel)
Minimum switch load	20 mV/1 mA



Note The PXIe-2526 is not recommended for 2-wire resistance measurements.



Note Switching inductive loads (for example, motors and solenoids) can produce high voltage transients in excess of the module's rated voltage. Without additional protection, these transients can interfere with module operation and impact relay life. For more information about transient suppression, visit ni.com/info and enter the Info Code relayflyback.

DC path resistance

Initial	$< 0.5 \Omega$
End-of-life	$\geq 1.5 \Omega$

DC path resistance is a combination of relay contact resistance and trace resistance. Measure path resistance by combining the resistance of the high and low signal paths from one row to one column. Contact resistance typically remains low for the life of a relay. At the end of relay life, the contact resistance rises rapidly above $\geq 1.5 \Omega$.

Thermal EMF	$< 10 \mu V$
-------------	--------------

RF Performance Characteristics

Bandwidth (-3 dB, typical at 23 °C) 50 Ω termination		≤ 10 MHz
Open channel isolation (typical at 23 °C) 50 Ω termination		
10 kHz	≥ 67 dB	
100 kHz	≥ 49 dB	
1 MHz	≥ 29 dB	

Dynamic Characteristics

Relay operate time		
Typical		1 ms
Maximum		3.1 ms
Simultaneous drive limit		82 relays
Expected relay life		
Mechanical	1×10^8 cycles	
Electrical		
≤ 30 mV, ≤ 10 mA resistive		2.5×10^6 cycles
30 V, 1 A		5×10^5 cycles
30 V, 2 A		1×10^5 cycles

60 VDC, 1 ADC resistive

 1×10^5 cycles

Note Relays are field replaceable. Refer to the **NI Switches Help** at ni.com/manuals for more information about replacing a failed relay.

Physical Characteristics

Relay type	Electromechanical, non-latching
Relay contact material	Palladium-ruthenium, gold covered
Front panel connector	160 DIN 41612, 160 positions, male
Power requirement PXI Express 12 V 21 W 3.3 V 3.4 W	
Dimensions (L × W × H)	3U, one slot, PXI/cPCI module, PXI Express compatible 21.6 cm × 2.0 cm × 13.0 cm (8.5 in. × 0.8 in. × 5.1 in.)
Weight	230 g (8.1 oz)

Environment

Maximum altitude	2,000 m (800 mbar) (at 25 °C ambient temperature)
Pollution Degree	2

Indoor use only.

Operating Environment

Ambient temperature range	0 °C to 55 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Storage Environment

Ambient temperature range	-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)


Shock and Vibration

Operating shock	30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC 60068-2-27. Meets MIL-PRF-28800F Class 2 limits.)
Random vibration Operating 5 Hz to 500 Hz, 0.3 g _{rms} (Tested in accordance with IEC 60068-2-64.) Nonoperating 5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC 60068-2-64. Test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)	

Diagrams

The following figure shows the PXIe-2526 power-on state.


Figure 1. PXIe-2526 Power-On State

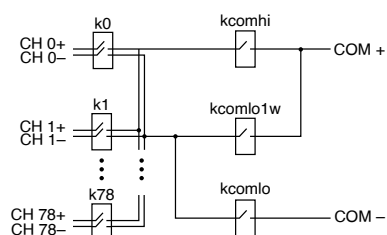

The following figures show the PXIe-2526 connector pinouts.

Pin Number	Pin Label	Pin Label	Pin Number
CH80	B32	C32	D32
CH79	A32	C31	D31
CH1	B31	C30	D30
CH0	A31	C29	D29
CH85	B30	C28	D28
CH84	A30	C27	D27
CH6	B29	C26	D26
CH5	A29	C25	D25
CH90	B28	C24	D24
CH89	A28	C23	D23
CH11	B27	C22	D22
CH10	A27	C21	D21
CH95	B26	C20	D20
CH94	A26	C19	D19
CH16	B25	C18	D18
CH15	A25	C17	D17
CH100	B24	C16	D16
CH99	A24	C15	D15
CH21	B23	C14	D14
CH20	A23	C13	D13
CH105	B22	C12	D12
CH104	A22	C11	D11
CH26	B21	C10	D10
CH25	A21	C9	D9
CH110	B20	C8	D8
CH109	A20	C7	D7
CH31	B19	C6	D6
CH30	A19	C5	D5
CH115	B18	C4	D4
CH114	A18	C3	D3
CH36	B17	C2	D2
CH35	A17	C1	D1
CH120	B16		
CH119	A16		
CH41	B15		
CH40	A15		
CH125	B14		
CH124	A14		
CH46	B13		
CH45	A13		
CH130	B12		
CH129	A12		
CH51	B11		
CH50	A11		
CH135	B10		
CH134	A10		
CH56	B9		
CH55	A9		
CH140	B8		
CH139	A8		
CH61	B7		
CH60	A7		
CH145	B6		
CH144	A6		
CH66	B5		
CH65	A5		
CH150	B4		
CH149	A4		
CH71	B3		
CH70	A3		
CH155	B2		
CH154	A2		
CH76	B1		
CH75	A1		

Figure 3. PXIe-2526 2-Wire Pinout

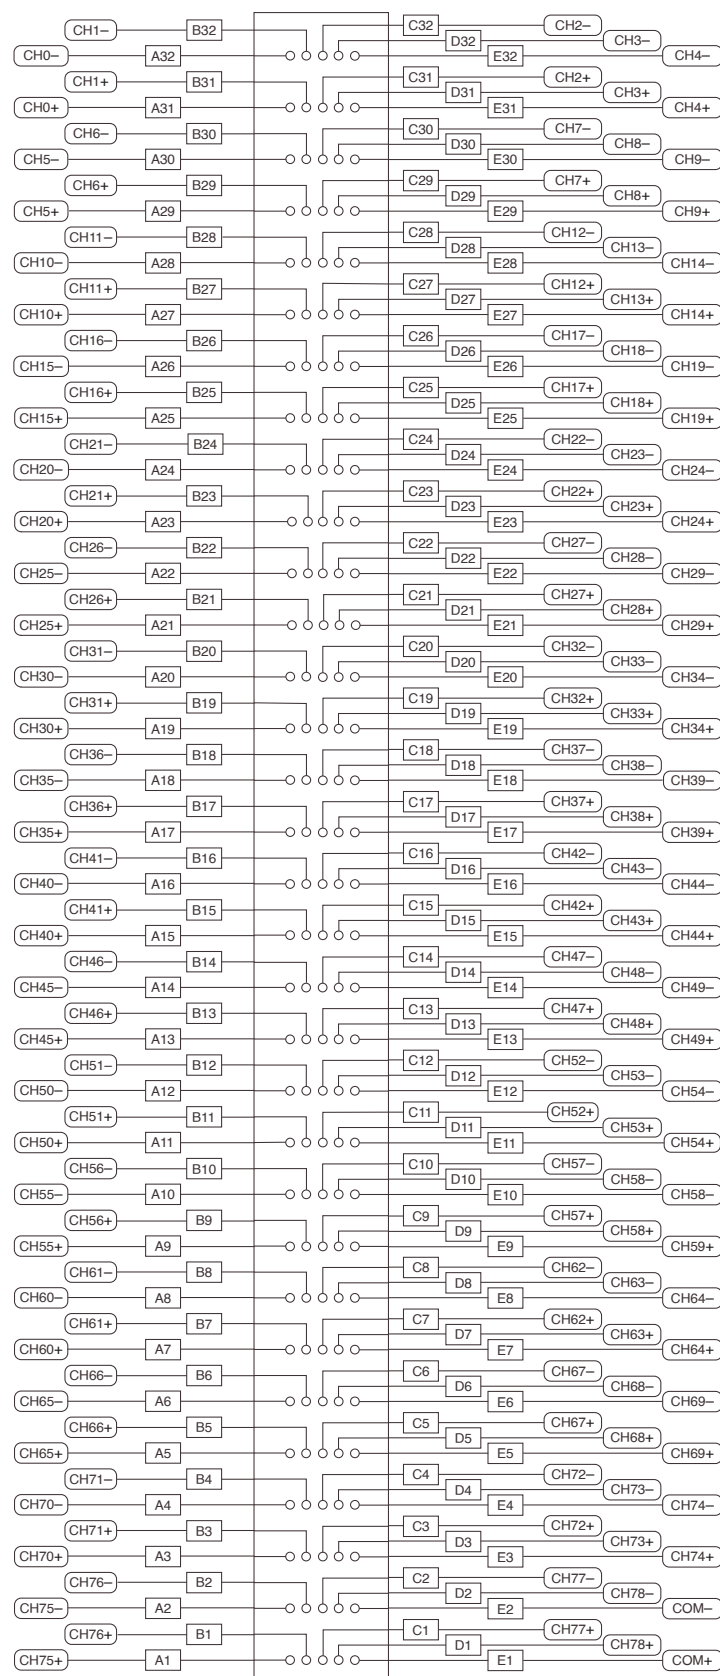

Accessories

Table 1. NI Accessories for the PXle-2526

Accessory	Part Number
DIN160 to 50-pin D-SUB switch cable, 1 m	782417-03
DIN160 to DIN160 switch cable, 1 m	782417-02
DIN160 to bare wire switch cable, 1 m	782417-01
Relay replacement kit for IME02TS Relays	782461-10

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions

- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the **Minimize Our Environmental Impact** web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)

EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法 (中国 RoHS)

中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令(RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)