

Hardened Industrial 5 Port PoE+ Ethernet Switch

multicomp PRO

5 Port (Ports 1-4 PoE+) Unmanaged 10/100 Ethernet Switch DIN Mountable

**RoHS
Compliant**



Features

- 5 port PoE+ 10/100 Fast Ethernet device
- Ports 1-4 PoE+ capable
- Fully compliant to IEEE 802.3af/at
- PoE Power Budget: 90W @ 70°C
- Industrial temp range: -40°C to +70°C
- Redundant dual power inputs: +44V to +57V DC
- Compact design with integral DIN mount
- Allows power and data to be combined on the same Ethernet cable

Specifications

Power Consumption	: 4 Watts Max : 91m Amps @ +44V DC/70m Amps @ +57V DC
Power Supply Input	: Unregulated +44V to +57Volts DC, reverse polarity protection
Isolation	: 1500Vrms Magnetic isolation from Ethernet
Operating and Storage Temperature	: -40°C to +70°C / -40°F to +158°F
Ambient Relative Humidity	: 5 to 95% (non-condensing)
Ethernet Ports	: 5 x RJ45 jack, 10/100Mhz autosensing, crossover auto sensing (Auto MDIX)
Protection	: 1,500 Volts magnetic isolation between ports
Housing	: IP-20 rated non-conducting polyamide case
Screw Terminals	: 3.5mm pitch, #22 - #14, 0.5mm ² - 2.5mm ² pin power supply
Wire Thickness	: 0.15 inch, 3.81mm, 20 pins, 12+8 screw terminals, #26 - #16 AWG, 0.14mm ² - 1.3mm ²
Link/Activity LED	: Solid green Connection established Flashing Green Data communication
PoE Power LED (Ports 1-4)	: Solid Yellow PoE Power ON Flashing Yellow Power Warning


Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Hardened Industrial 5 Port PoE+ Ethernet Switch



Diagram

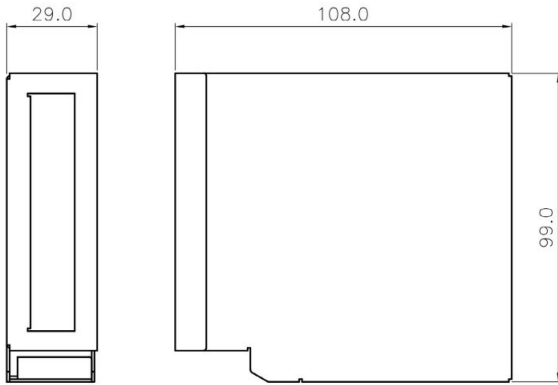


Ethernet Ports × 4 Pin Outs

PIN	Function
1	Tx+ DC+
2	Tx- DC+
3	Rx+ DC-
4	unused
5	unused
6	Rx- DC-
7	unused
8	unused

Power Terminal Pin Outs

Pin	Function
1	-V
2	+VA
3	+VB
4	-V

5 position 3.5mm pitch pluggable terminal block included

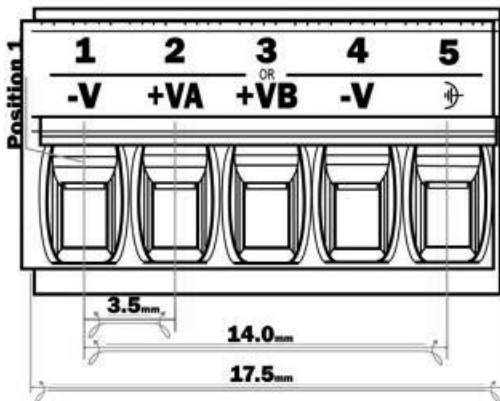

Dimensions : Millimetres

Part Number Table

Description	Part Number
Hardened Industrial Ethernet Switch, 5 Port, 10/100Mbps, DIN Rail Mount	MP-625

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

