



1750Z

TUBE GUITAR AMPLIFIER - OUTPUT TRANSFORMER

- Designed for drop in replacement of original units such as Traynor¹ Bass Mate YBA-2 (A1313)
- Constructed to look similar to original factory units (where possible).
- Material used & design specifications were kept as close as possible to the original part to preserve the stock "tone".
- Open style with minimum 15" long primary and secondary leads
- Frequency response 70Hz 15KHz (0/-1dB reference @ 1KHz)
- Distortion is less than 1% @ 70Hz

ELECTRICAL SPECIFICATIONS					
Charact	teristics	Typical			
Input Im	pedance	10000 Ohms			
Output In	npedance	8 Ohms			
Output Power		20 W			
	CR				
Primary Brown-Red		608.7 Ohms			
Primary Red-Blue		651.5 Ohms			
Secondary Black-Green		0.706 Ohm			
Inductance	Impedance	@ 60Hz, 10.0 V OC			
Primary Brown-Blue		164H	64.0 KOhm		
Leakage Inductance		@ 60Hz, 10.0 V SC			
Primary Blue-Brown		141.8mH			
	•				
Dielectric	Strength	2000VRMS			
Temperature Range		-40 to 105 degC			



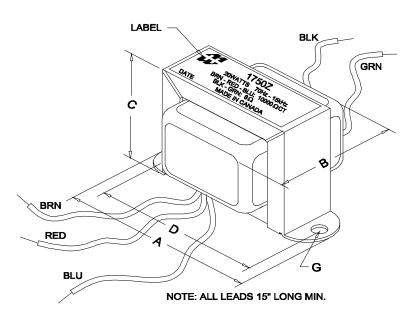


Dimensions					
Α	3.688" ±0.063	С	2.308" ±0.063		
В	2.400" ±0.125	D	3.125" ±0.063	G	0.187 " ±0.015

TEST CONDITIONS

Measurement instruments:

D scope series iii audio analyzer Wayne Kerr 3255B with a 3265B Keithley 2010 DVM Hp4192a impedance analyzer

TYPICAL TEST CIRCUIT




¹DISCLAIMER: Hammond Mfg. is not affiliated with Fender Musical Instruments Corp., Marshall Amplification, Yorkville/Traynor, AMPEG or VOX Amplification companies.

Amplifier model names are trademarks of the amplifier companies and are just listed here for reference purpose only.


^{*} All graphs input level 27dBu @1.0KHz reference.

^{**}The results are typical and are subject to normal manufacturing and electrical tolerances.


1750Z Frequency Response RS = 10K Ohms

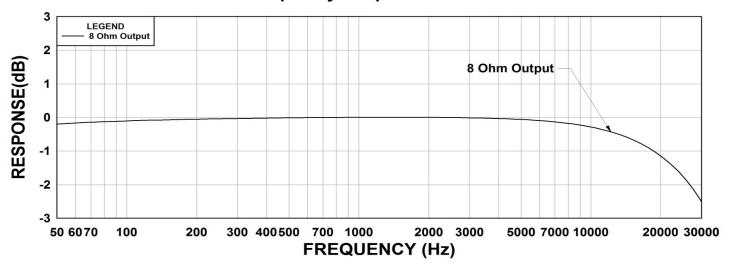

1750Z Phase Shift RS = 10K Ohms

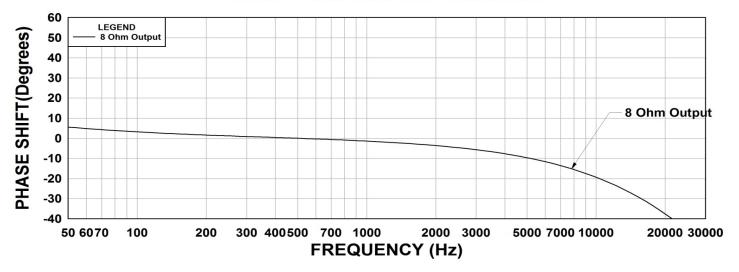

1750Z THD+N RS = 10K Ohms

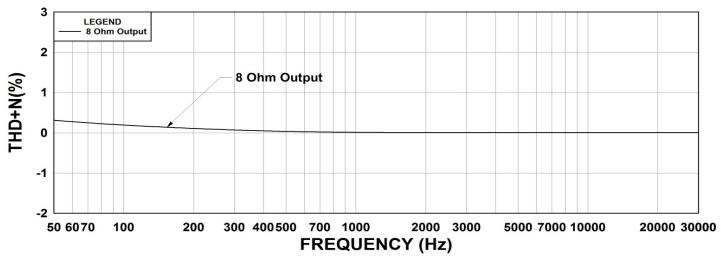

This drawing and the information in it is the property of Hammond Manufacturing. It may not be reproduced, transmitted or used in any manner whatsoever without the written permission of Hammond Manufacturing. Data subject to change without notice.