

Type: **P3-100/V/SVB**
 Article No.: **088558**
 Sales text **CIRCUIT INTERRUPTER P3-100(UK)**



Ordering information

			BME-CAT Fotos
Produktgruppen-Bezeichnung			T rotary switches, P switch-disconnectors, technical data
			Load current switches
			Main switches, maintenance switches
Design			Rear mounting
Basic type for ... insert mounting form			P3-100/...
Mounting form			V/SVB
No. of poles		M	3
Description			As Emergency-Stop device

General

Standards			IEC/EN 60 947, VDE 0660, IEC/EN 60 204, CSA, UL Switch-disconnectors to IEC/EN 60 947-3 NEMA3R, NEMA12, NEMA13
Lifespan, mechanical	Operations	$\times 10^6$	0,1
Maximum operating frequency	Operations/h		50

Climatic proofing			Damp heat, constant, to IEC 60068–2–78; Damp heat, cyclical, to IEC 60068–2–30
Ambient temperature			
Open		°C	–25...50
Enclosed		°C	–25...40
Mounting position			As required
Mechanical shock resistance to IEC 60068–2–27	Half-sinusoidal shock 20 ms	g	> 15

Contacts

Rated operational voltage	U_e	V AC	690
Rated impulse withstand voltage	U_{imp}	V AC	6000
Overtoltage category/pollution degree			III/3
Rated uninterrupted current			
open	I_u	A	100
Enclosed	I_u	A	100
Load rating with intermittent operation, class 12			
AB 25 % DF		$\times I_e$	2
AB 40 % DF		$\times I_e$	1,6
AB 60 % DF		$\times I_e$	1,3
Short-circuit rating			
Fuse		A gG/gL	100
Rated short-time withstand current (1 s current)	I_{cw}	A_{rms}	2000
Switching angles		°	90
Current heat loss per contact at I_e		W	7,5

Terminal capacities

Solid or stranded		mm ²	1 × (2.5 – 35) 2 × (2.5 – 10)
Flexible with ferrule to DIN 46228		mm ²	1 × (1.5 – 25) 2 × (1.5 – 6)
Terminal screw			M5
Tightening torque		Nm	3

Switching capacity

AC			
Rated making capacity $\cos \phi = 0.35$		A	950
Rated breaking capacity, motor			


load switch $\cos = 0.35$			
230 V		A	760
400 V		A	740
500 V		A	880
690 V		A	520
Rated operational current 440 V load-break switch AC-21A	I_e	A	100
AC-3 motor load switch motor rating			
230 V	P	kW	22
400 V	P	kW	37
500 V	P	kW	45
690 V	P	kW	37
AC-23A Motor load switches (main switches maintenance switches)			
230 V	P	kW	30
400 V	P	kW	50
500 V	P	kW	65
690 V	P	kW	45
DC			
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I_e	A	100
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I_e	A	50
Contacts		Quantity	1
48 V			
Rated operational current	I_e	A	50
Contacts		Quantity	2
60 V			
Rated operational current	I_e	A	50
Contacts		Quantity	3
120 V			
Rated operational current	I_e	A	25
Contacts		Quantity	3

Notes

Notes


Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft
 The rated uninterrupted current I_u is stated at max. connected cross-section.
 For terminal capacity solid, stranded and flexible:
 Max. 2 cross-section sizes difference admissible when using 2 conductors.

Dimensions

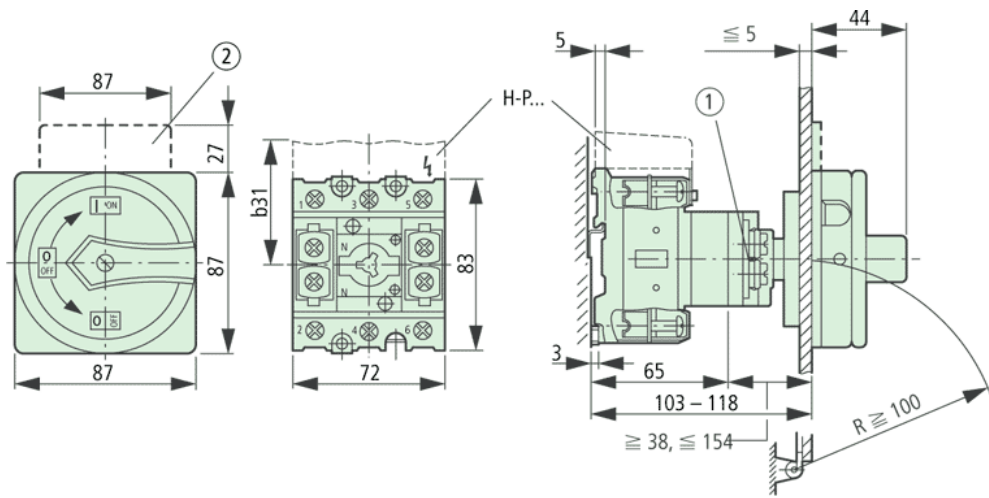


Shaft can be extended using ZVV-... + ZAV-..., max. $F 4 \times 25 = 100$ mm
 Not included

Dimensions

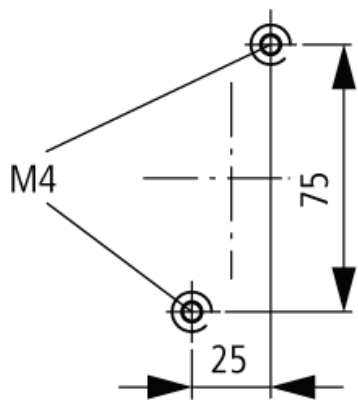


Diameter of drilled hole Bottom

Dimensions

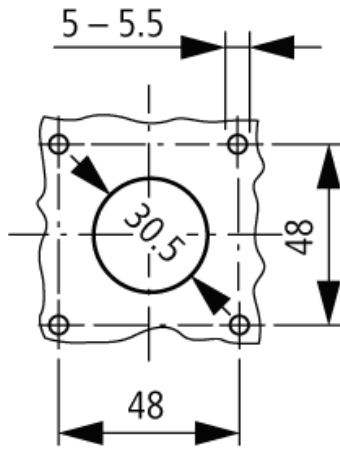


Diameter of drilled hole Door

Dimensions

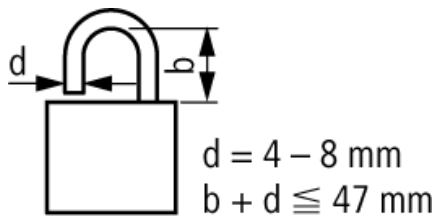

3 Padlocks

Characteristic curve

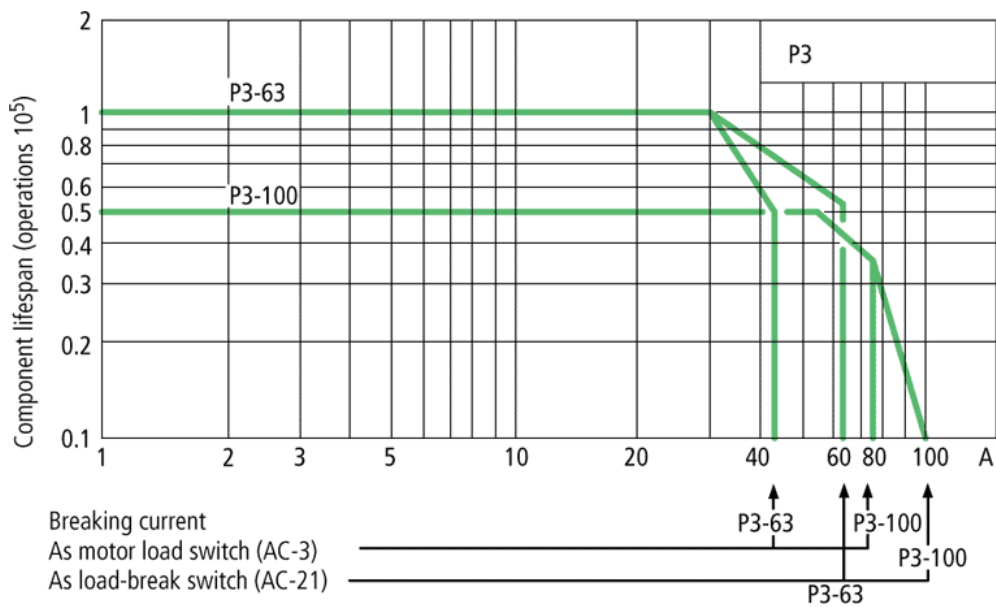

For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging)
 The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A to ensure a reasonable device lifespan.

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn

