

SIG200-0A0512200 SIG200

SENSOR INTEGRATION GATEWAY





Ordering information

Туре	Part no.
SIG200-0A0512200	1089796

Other models and accessories → www.sick.com/SIG200



Detailed technical data

Features

Product category	IO-Link Master
Supported products	IO-Link Devices Binary actuators Binary switching sensors
Further functions	Web server integrated USB connection for easy configuration of the SIG200 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK Logic editor is available for easy configuration of logic functions
Items supplied	SIG200-0A0512200, $4x$ blind plugs (M12) on port S2, S3, S4, P2, $1x$ blind plug (M8) on port CONFIG, Marking labels, quickstart

Mechanics/electronics

Connections	
IO-Link	4 x M12, 5-pin female connector, A-coded
Power	1 x M12, 4-pin plug, A-coded
CONFIG	1 x M8, 4-pin female connector, USB 2.0 (USB-A)
Ethernet	2 x M12, 4-pin female connector, D-coded
Power voltage supply	
Supply voltage	10 V DC 30 V DC ¹⁾
Current consumption	
	\leq 175 mA (At supply voltage 24 V DC) $^{2)}$
	\leq 3,000 mA $^{3)}$
Optical indicators	4 LED green (To the IO-Link ports, Pin4 (C/DI/D0))

 $^{^{1)}}$ 10 - 30 V DC without IO-Link, 18 - 30 V DC with IO-Link.

 $^{^{2)}}$ Without sensors, outputs switched off.

³⁾ The sum of all outputs, including the digital outputs, must not exceed the maximum current consumption of the device. The current consumption must be limited.

⁴⁾ Pin 4 configured as digital output. The maximum output current does not depend on the voltage supply at pin 1 of S1-S4.

	4 LED yellow (To the IO-Link ports, Pin2 (DI)) 2 LED green (To the Ethernet ports) 1 LED green (For the Power Port) 1 LED dual-color (For module status communication) 1 LED green (For network status communication)
Input/output characteristics	
S1-S4 pin 1 voltage supply	≤ 500 mA
S1-S4 pin 4 output current	\leq 200 mA $^{4)}$
Power Port pin 4 output voltage HIGH	$V_{H} \ge V_{US} - 3 V$
S1-S4 pin 2 input voltage	Type 3 IEC 61131-2
S1-S4 pin 4 input voltage	Type 1 IEC 61131-2
Enclosure rating	IP67
Protection class	III
Housing material	Zinc
Housing color	Light blue/Black
Weight	520 g
Dimensions (L x W x H)	213.9 mm x 57 mm x 38.3 mm
UL File No.	E497722

 $^{^{1)}}$ 10 - 30 V DC without IO-Link, 18 - 30 V DC with IO-Link.

Interfaces

Communication interface	IO-Link, USB, Ethernet, EtherNet/IP™, REST API		
Logic editor ✓			
Web server	√		
IO-Link Master			
Function	The SIG200 Sensor Integration Gateway is an IO-Link master with 4 configurable ports to which IO-Link device as well as binary switching sensors and actuators can be connected. The gateway data is made available to a PLC or cloud application via the REST API. SIG200 can also be operated as a standalone system by directly configuring simple logic functions across several connected devices via the SOPAS ET user interface.		
IO-Link version	V1.1, V1.0		
Port Class	A		
Number of IO-Link ports	4		
Transmission type	COM1, COM2, COM3		
Operator interfaces	SOPAS ET, the engineering tool for configuration via USB, Additionally, the SIG200 can be configured via the integrated webserver. Default IP adress: $192.168.0.1$		
MAC address	See product label		
Number of inputs	Max. 8 x PNP, type 1 or 4 x IO-Link		
Number of outputs	Max. 4 x PNP		
Max. Output frequency	50 Hz		
Inputs/outputs			
S1-S4	4 configurable ports Pin4 can be used in one of the available port modes: IO-Link, digital input or digital output. An additional digital input signal can be connected using Pin2.		
LINK/ACT 1 & 2	Two Ethernet ports are provided for the network connection		

 $^{^{2)}}$ Without sensors, outputs switched off.

³⁾ The sum of all outputs, including the digital outputs, must not exceed the maximum current consumption of the device. The current consumption must be limited.

 $^{^{4)}}$ Pin 4 configured as digital output. The maximum output current does not depend on the voltage supply at pin 1 of S1-S4.

CONFIG	Port for configuration via USB with SOPAS ET (SOPAS ET can be downloaded for free from www.sick.com)
Initialization time after switch on	70s (plus additional time for IODD installation)

Ambient data


Ambient operating temperature	-40 °C +55 °C ¹⁾
Ambient temperature, storage	-40 °C +75 °C ¹⁾
Electromagnetic compatibility (EMC)	EN 61000-6-2:2005-08 EN 61000-6-3:2007-01
Shock load	EN 60068-2-6

 $^{^{1)}}$ Permissible relative air humidity: 0 % ... 90 % (non-condensing).

Classifications


eCl@ss 5.0	27242208
eCl@ss 5.1.4	27242608
eCl@ss 6.0	27242608
eCl@ss 6.2	27242608
eCl@ss 7.0	27242608
eCl@ss 8.0	27242608
eCl@ss 8.1	27242608
eCl@ss 9.0	27242608
eCl@ss 10.0	27242608
eCl@ss 11.0	27242608
eCl@ss 12.0	27242608
ETIM 5.0	EC001604
ETIM 6.0	EC001604
ETIM 7.0	EC001604
ETIM 8.0	EC001604
UNSPSC 16.0901	32151705

Dimensional drawing (Dimensions in mm (inch))

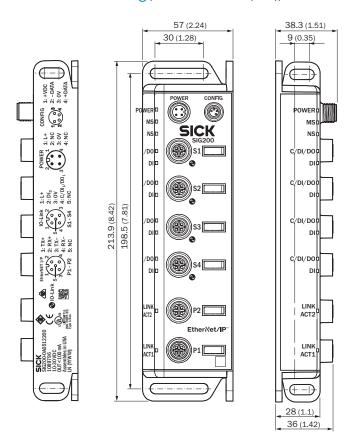


Connection diagram

Cd-430

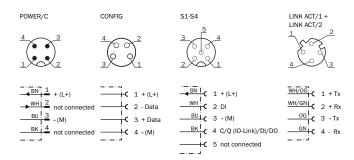


PIN assignment

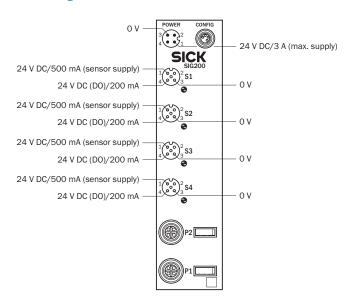

Adjustment possible

Logic editor

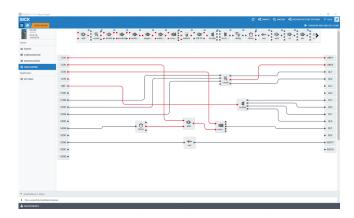

Recommended accessories

Other models and accessories → www.sick.com/SIG200

	Brief description	Туре	Part no.
Plug connectors and cables			
10 10	Head A: female connector, M12, 4-pin, straight, A-coded Head B: male connector, M12, 4-pin, straight, A-coded Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 1 m	YF2A14- 010UB3M2A14	2095997
10 10	Head A: male connector, M12, 4-pin, straight, D-coded Head B: male connector, RJ45, 4-pin, straight Cable: Ethernet, PROFINET, PUR, halogen-free, shielded, 2 m	YM2D24- 020PN1MRJA4	2106182

SENSOR INTEGRATION GATEWAY

	Brief description	Туре	Part no.
1	Head A: male connector, M8, 4-pin, straight Head B: male connector, USB-A, 4-pin, straight Cable: USB 2.0, PVC, shielded, 1.5 m	YM8U24- 015VG3MUSA	6051163
Sensor Integr	ation Gateway		
Canada A	 Further functions: USB connection for easy configuration of the SIG100 Sensor Integration Gateway with SOPAS ET, the engineering tool from SICK, logic editor is available for easy configuration of logic functions I/O connection: 6 x M12, 5-pin female connector, A-coded Connection CONFIG: 1 x M8, 4-pin female connector, USB 2.0 (USB-A) Logic editor: yes Communication interface: USB, IO-Link Product category: IO-Link Hub 	SIG100-0A0111100	1089792

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

