




UMA-series

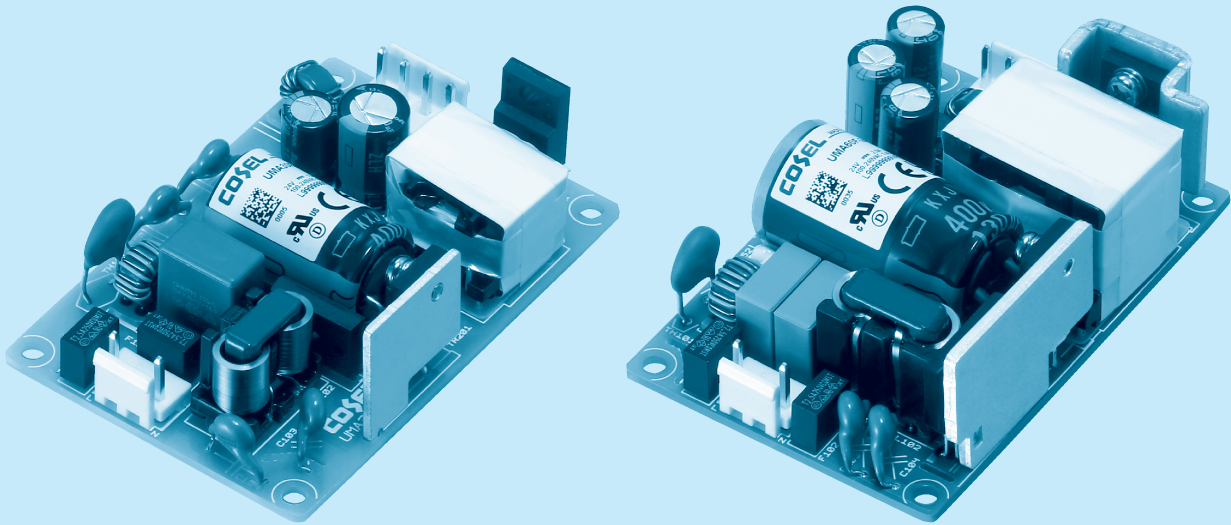

Feature

For medical electric equipment
 Medical Isolation Grade 2MOPP
 4kV isolation
 Suitable for BF application
 Low leakage current
 2"× 3" standard footprint
 Economical design

Safety agency approvals

ANSI/AAMI ES60601-1, EN60601-1 3rd,
 C-UL (CAN/CSA-C22.2 No.60601-1),
 UL62368-1, EN62368-1,
 C-UL (CAN/CSA-C22.2 No.62368-1),
 Complies with EN60335

CE marking

Low Voltage Directive
 RoHS Directive

UKCA marking

Electrical Equipment Safety Regulations
 RoHS Regulations

5-year warranty (See Instruction Manual)

EMI

Complies with CISPR11 classB, CISPR32 classB, EN55011-B,
 EN55032-B, FCC Part15 classB and FCC Part18 classB


EMS Compliance : EN61204-3, EN61000-6-2 IEC60601-1-2 (2014), EN60601-1-2 (2015)

EN61000-4-2
 EN61000-4-3
 EN61000-4-4
 EN61000-4-5
 EN61000-4-6
 EN61000-4-8
 EN61000-4-11

UMA30F

UM A 30 F - -

① ② ③ ④ ⑤ ⑥

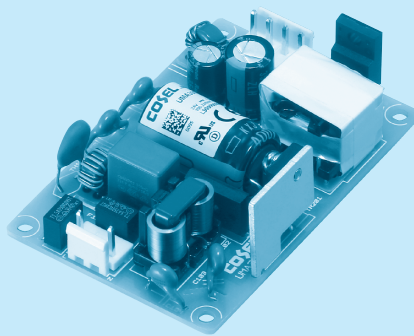

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional *5
 E : IEC Class II
 T : Terminal block
 Y : with Potentiometer

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

| MODEL | UMA30F-5 | UMA30F-12 | UMA30F-15 | UMA30F-24 | UMA30F-36 | UMA30F-48 |
|-----------------------|----------|-----------|-----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 15 | 30 | 30 | 31.2 | 30.6 | 31.2 |
| DC OUTPUT | 5V 3A | 12V 2.5A | 15V 2A | 24V 1.3A | 36V 0.85A | 48V 0.65A |

SPECIFICATIONS

| | MODEL | | UMA30F-5 | UMA30F-12 | UMA30F-15 | UMA30F-24 | UMA30F-36 | UMA30F-48 | |
|------------------------------------|----------------------------|--|---|----------------|----------------|----------------|----------------|----------------|--------|
| INPUT | VOLTAGE[V] | | AC85 - 264 1ϕ | | | | | | |
| | CURRENT[A] | ACIN 115V | 0.35 | 0.7 | | | | | |
| | | ACIN 230V | 0.15 | 0.3 | | | | | |
| | FREQUENCY[Hz] | | 50/60 (47-63) | | | | | | |
| | EFFICIENCY[%] | ACIN 115V | 81typ | 86typ | 86typ | 88typ | 88typ | 88typ | |
| | | ACIN 230V | 80typ | 87typ | 87typ | 89typ | 89typ | 89typ | |
| | INRUSH CURRENT[A] | ACIN 115V | 25typ | | | | | | |
| | | ACIN 230V | 50typ | | | | | | |
| LEAKAGE CURRENT[μA] | ACIN 264V | 200max | | | | | | | |
| TOUCH CURRENT[μA] | ACIN 264V | 75max | | | | | | | |
| OUTPUT | VOLTAGE[V] | | 5 | 12 | 15 | 24 | 36 | 48 | |
| | CURRENT[A] | | 3 | 2.5 | 2 | 1.3 | 0.85 | 0.65 | |
| | WATTAGE[W] | | 15 | 30 | 30 | 31.2 | 30.6 | 31.2 | |
| | LINE REGULATION[mV] | *1 | 20max | 48max | 60max | 96max | 144max | 192max | |
| | LOAD REGULATION[mV] | *1 | 100max | 120max | 120max | 150max | 240max | 240max | |
| | RIPPLE NOISE [mVp-p] | *2 lo=100% | 150 (Bandwidth 20MHz) | | | | | | |
| | TEMPERATURE REGULATION[mV] | | 0~+50℃ | 100max | 120max | 150max | 240max | 360max | 480max |
| | START-UP TIME[ms] | ACIN 115V | 40typ | | | | | | |
| | | ACIN 230V | | | | | | | |
| | HOLD-UP TIME[ms] | ACIN 115V | 20typ | | | | | | |
| | | ACIN 230V | | | | | | | 100typ |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | | Fixed ("Y"option is available for adjusting output voltage between ±10%) | | | | | | | |
| OUTPUT VOLTAGE SETTING[V] | | 4.90 to 5.30 | 11.50 to 12.50 | 14.40 to 15.60 | 23.00 to 25.00 | 34.50 to 37.50 | 46.00 to 50.00 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION [A] | | Works over 105% of rating and recovers automatically | | | | | | |
| | OVERVOLTAGE PROTECTION[V] | | 5.75 to 7.00 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 55.20 to 67.20 | |
| ISOLATION | INPUT-OUTPUT | | AC4,000V 1minute, DC500V 100MΩ min (At Room Temperature) 2MOPP | | | | | | |
| | INPUT-FG | | AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP | | | | | | |
| | OUTPUT-FG | | AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP | | | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID.*3 | | -20 to +70℃, 20 - 90%RH (Non condensing) | | | | | | |
| | STORAGE TEMP., HUMID. | | -20 to +75℃, 20 - 90%RH (Non condensing) | | | | | | |
| | VIBRATION | | 10 - 55Hz, 19.6m/s ² (2G) , 3minutes period, 60minutes each along X, Y and Z axis | | | | | | |
| | IMPACT | | 196.1m/s ² (20G) , 11ms, once each X, Y and Z axis | | | | | | |
| SAFETY AND EMC | AGENCY APPROVALS | | ANSI/AAMI ES60601-1, EN60601-1 3rd, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1) , UL62368-1, EN62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1) , Complies with EN60335-1 | | | | | | |
| | EMC EMISSION | | Complies with CISPR11 classB, CISPR32 classB, EN55011-B,EN55032-B, FCC Part15 classB and FCC Part18 classB | | | | | | |
| | EMC EMMUNITY | | Complies with EN61000-4-2, 3, 4, 5, 6, 8, 11 | | | | | | |
| | HARMONIC ATTENUATOR*6 | | Complies with IEC61000-3-2 (Class A) No built-in active PFC | | | | | | |
| OTHERS | CASE SIZE/WEIGHT *7 | | 50.8×21.7×76.2mm [2.0×0.85×3.0 inches] (W×H×D) / 80g max | | | | | | |
| | COOLING METHOD | | Convection | | | | | | |
| WARRANTY | WARRANTY | *4 | 5 years (subject to the operating conditions) | | | | | | |

*1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (lo=0~20%Atyp) load.

*2 This is the result of measurement of the testing board with capacitors of 47μF and 0.1μF placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.

When the load factor is low (lo=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

*3 Output power derating is required. Refer to "Derating"

*4 Consult us about details.

*5 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.

*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*7 Dimensions below PCB are not included.


* All parameters not specially mentioned are measured at ACIN 230V, rated load and 25℃ of ambient temperature.

* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.

* Parallel operation is not possible with this model.

* Acoustic noise may be heard from the power supply when used for pulse load.

External view

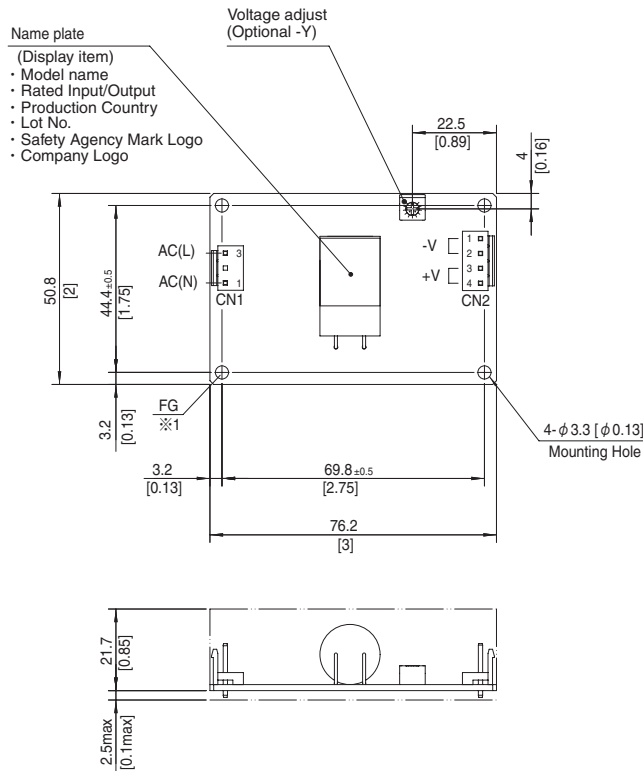

Mating connector and terminal of CN1, CN2


| I/O Connector | Mating Connector | Terminal | Mfr. |
|---------------|------------------|--|--------|
| CN1 | B2P3-VH | Reel : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1 | J.S.T. |
| CN2 | B4P-VH | Chain : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1 | J.S.T. |

<Pin Assignments>

| CN1 | | CN2 | |
|---------|-------|---------|--------|
| Pin No. | Input | Pin No. | Output |
| 1 | AC(N) | 1, 2 | -V |
| 2 | AC(L) | 3, 4 | +V |
| 3 | | | |

- ※ Dimensions in mm, [] =inches
- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 80g max
- ※ PCB Material/thickness : CEM-3/1.6 [0.06]
- ※ 1 The mounting hole is for FG connection.
The mounting hole in the -E option is not for FG connection.

Derating Curve

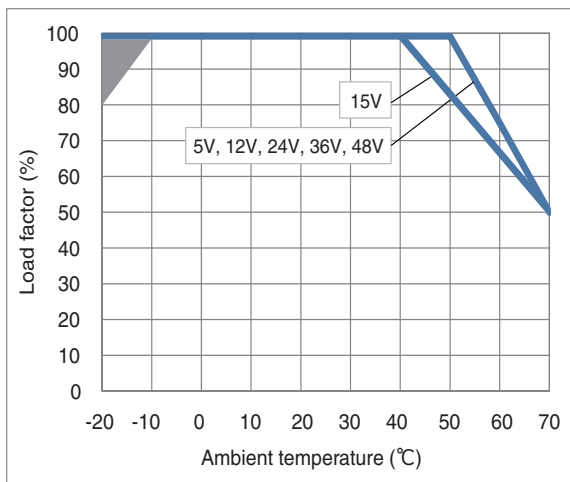

*The shaded area is the derating required at start-up.

Fig.1 Derating curve depending on ambient temperature

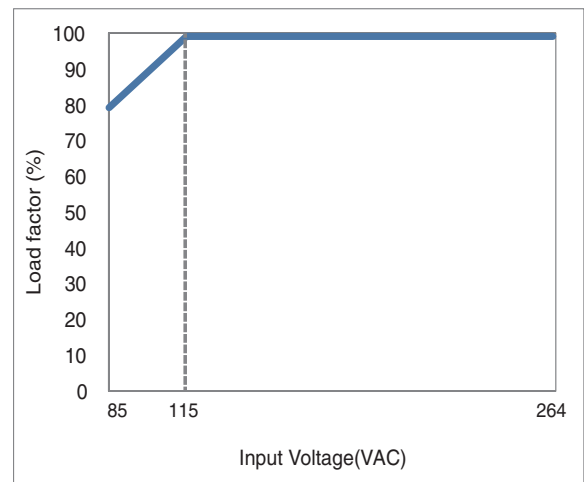



Fig.2 Derating curve depending on input voltage

■ The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

UMA60F

UM A 60 F -□ -□

① ② ③ ④ ⑤ ⑥

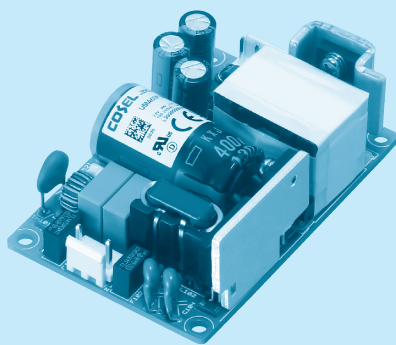

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional *5
 E : IEC Class II
 T : Terminal block
 Y : with Potentiometer

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

| MODEL | UMA60F-5 | UMA60F-7R5 | UMA60F-12 | UMA60F-15 | UMA60F-24 | UMA60F-36 | UMA60F-48 |
|-----------------------|----------|------------|-----------|-----------|-----------|-----------|-----------|
| MAX OUTPUT WATTAGE[W] | 30 | 41.25 | 54 | 52.5 | 60 | 61.2 | 60 |
| DC OUTPUT | 5V 6A | 7.5V 5.5A | 12V 4.5A | 15V 3.5A | 24V 2.5A | 36V 1.7A | 48V 1.25A |

SPECIFICATIONS

| | MODEL | UMA60F-5 | UMA60F-7R5 | UMA60F-12 | UMA60F-15 | UMA60F-24 | UMA60F-36 | UMA60F-48 |
|-------------------------------|------------------------------------|---|---------------|----------------|----------------|----------------|----------------|----------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1φ | | | | | | |
| | CURRENT[A] | ACIN 115V | 0.7 | 1.0 | 1.4 | | | |
| | | ACIN 230V | 0.3 | 0.5 | 0.7 | | | |
| | FREQUENCY[Hz] | 50/60 (47-63) | | | | | | |
| | EFFICIENCY[%] | ACIN 115V | 80typ | 84typ | 87typ | 86typ | 88typ | 89typ |
| | | ACIN 230V | 80typ | 85typ | 88typ | 87typ | 90typ | 91typ |
| | INRUSH CURRENT[A] | ACIN 115V | 25typ | | | | | |
| | | ACIN 230V | 50typ | | | | | |
| OUTPUT | LEAKAGE CURRENT[μA] | ACIN 264V | 200max | | | | | |
| | TOUCH CURRENT[μA] | ACIN 264V | 75max | | | | | |
| | VOLTAGE[V] | 5 | 7.5 | 12 | 15 | 24 | 36 | 48 |
| | CURRENT[A] | 6 | 5.5 | 4.5 | 3.5 | 2.5 | 1.7 | 1.25 |
| | WATTAGE[W] | 30 | 41.25 | 54 | 52.5 | 60 | 61.2 | 60 |
| | LINE REGULATION[mV] *1 | 20max | 36max | 48max | 60max | 96max | 144max | 192max |
| | LOAD REGULATION[mV] *1 | 100max | 120max | 120max | 120max | 150max | 240max | 240max |
| | RIPPLE NOISE [mVp-p] *2 Io=100% | 150 (Bandwidth 20MHz) | | | | | | |
| PROTECTION CIRCUIT AND OTHERS | TEMPERATURE REGULATION[mV] | 0~+50℃ | 100max | 100max | 120max | 180max | 240max | 360max |
| | START-UP TIME[ms] | ACIN 115V | 40typ | | | | | |
| | | ACIN 230V | | | | | | |
| | HOLD-UP TIME[ms] | ACIN 115V | 20typ | | | | | |
| | | ACIN 230V | 100typ | | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed ("Y"option is available for adjusting output voltage between ±10%) | | | | | | |
| | OUTPUT VOLTAGE SETTING[V] | 4.90 to 5.30 | 7.20 to 7.80 | 11.50 to 12.50 | 14.40 to 15.60 | 23.00 to 25.00 | 34.50 to 37.50 | 46.00 to 50.00 |
| | OVERCURRENT PROTECTION [A] | Works over 105% of rating and recovers automatically | | | | | | |
| ISOLATION | OVERVOLTAGE PROTECTION[V] | 5.75 to 7.00 | 8.63 to 10.50 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 55.20 to 67.20 |
| | INPUT-OUTPUT | AC4,000V 1minute, DC500V 100MΩ min (At Room Temperature) 2MOPP | | | | | | |
| | INPUT-FG | AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP | | | | | | |
| ENVIRONMENT | OUTPUT-FG | AC2,000V 1minute, DC500V 100MΩ min (At Room Temperature) 1MOPP | | | | | | |
| | OPERATING TEMP., HUMID.*3 | -20 to +70℃, 20 - 90%RH (Non condensing) | | | | | | |
| | STORAGE TEMP., HUMID. | -20 to +75℃, 20 - 90%RH (Non condensing) | | | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G) , 3minutes period, 60minutes each along X, Y and Z axis | | | | | | |
| SAFETY AND EMC | IMPACT | 196.1m/s ² (20G) , 11ms, once each X, Y and Z axis | | | | | | |
| | AGENCY APPROVALS | ANSI/AAMI ES60601-1, EN60601-1 3rd, C-UL (equivalent to CAN/CSA-C22.2 No.60601-1) , UL62368-1, EN62368-1, C-UL (equivalent to CAN/CSA-C22.2 No.62368-1) , Complies with EN60335-1 | | | | | | |
| | EMC EMISSION | Complies with CISPR11 classB, CISPR32 classB, EN55011-B, EN55032-B, FCC Part15 classB and FCC Part18 classB | | | | | | |
| | EMC IMMUNITY | Complies with EN61000-4-2, 3, 4, 5, 6, 8, 11 | | | | | | |
| OTHERS | HARMONIC ATTENUATOR*6 | Complies with IEC61000-3-2 (Class A) No built-in active PFC | | | | | | |
| | CASE SIZE/WEIGHT *7 | 50.8×24.2×76.2mm [2.0×0.95×3.0 inches] (W×H×D) / 120g max | | | | | | |
| | COOLING METHOD | Convection | | | | | | |
| WARRANTY | WARRANTY | *4 5 years (subject to the operating conditions) | | | | | | |

*1 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at low (Io=0~20%Atyp) load.

*2 This is the result of measurement of the testing board with capacitors of 47μF and 0.1μF placed at 150 mm from the output terminals by a 20MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-GikenRM104.

When the load factor is low (Io=0~20%Atyp), the switching power loss is reduced by burst operation, which will cause ripple noise to go beyond the specifications.

*3 Output power derating is required. Refer to "Derating"

*4 Consult us about details.

*5 The listed options may affect the published standard specifications. Please contact us for detailed product specifications and safety approvals.

*6 Please contact us about another class. When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*7 Dimensions below PCB are not included.


* All parameters not specially mentioned are measured at ACIN 230V, rated load and 25℃ of ambient temperature.

* Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.

* Parallel operation is not possible with this model.

* Acoustic noise may be heard from the power supply when used for pulse load.

External view

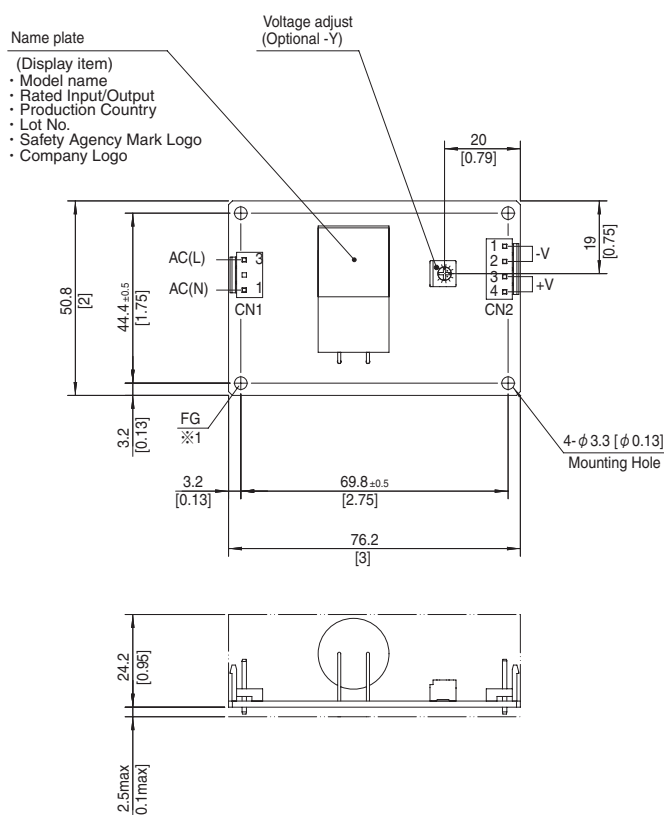

※ Dimensions in mm, [] =inches
 ※ Tolerance : ±1 [±0.04]
 ※ Weight : 120g max
 ※ PCB Material/thickness : FR-4/1.6 [0.06]
 ※1 The mounting hole is for FG connection.
 The mounting hole in the -E option is not for FG connection.


Mating connector and terminal of CN1, CN2

| I/O Connector | Mating Connector | Terminal | Mfr. |
|---------------|------------------|----------|--|
| CN1 | B2P3-VH | VHR-3N | Reel : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1 |
| CN2 | B4P-VH | VHR-4N | Chain : SVH-21T-P1.1 Loose piece : BVH-21T-P1.1 |

<Pin Assignments>

| CN1 | | CN2 | |
|---------|-------|---------|--------|
| Pin No. | Input | Pin No. | Output |
| 1 | AC(N) | 1, 2 | -V |
| 2 | | 3, 4 | +V |
| 3 | AC(L) | | |

Derating Curve

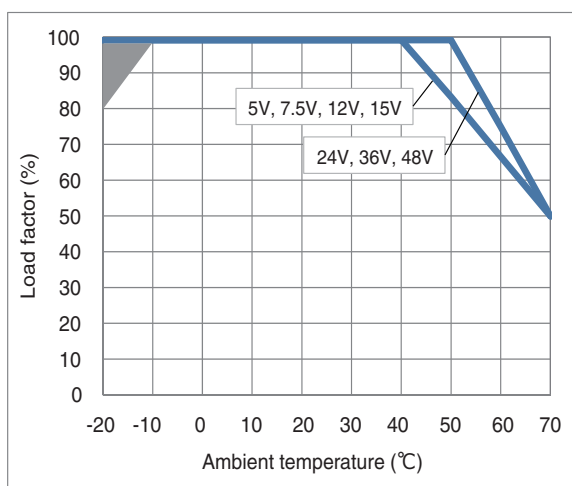

*The shaded area is the derating required at start-up.

Fig.1 Derating curve depending on ambient temperature

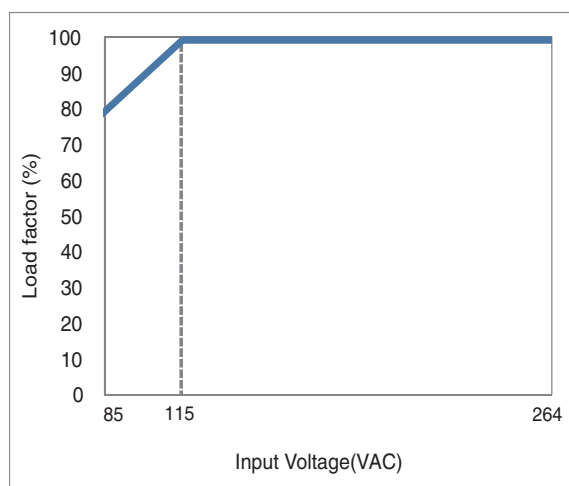



Fig.2 Derating curve depending on input voltage

■ The ambient temperature should be measured 5 to 10 cm away from the power supply so that it won't be influenced by the heat from the power supply. Please consult us for more details.

Assembling and Installation Method

■ When the power supply is used with natural convection cooling, the standard mounting position is horizontal.


■ AC voltage exists on the primary side. Therefore, in order to prevent electric shock, or to meet the leakage current requirements of the safety standard, you need to ensure the proper insulation distance.

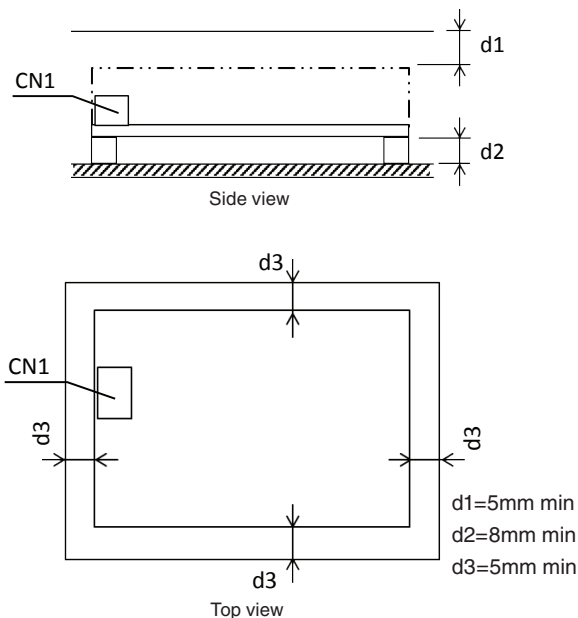

Mounting screw

■ The mounting screws should be M3.
The hatched area indicates the proper area for mounting hardware.

■ This power supply is manufactured by SMD technology.
Stress to the PCB such as twisting or bending may cause damage to the unit, please handle with care.

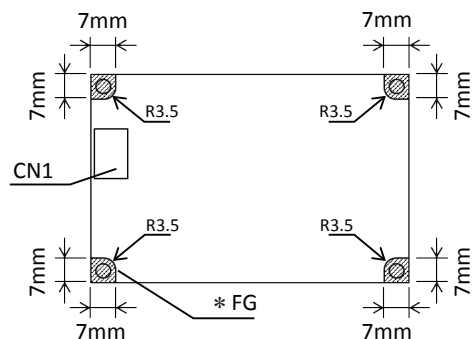

* Recommend to electrically connect FG to metal chassis for reducing noise.

Instruction Manual

■ Please read the "Instruction Manual" and "Before using our product" before you use our product.

Instruction Manual <https://en.cosel.co.jp/product/powersupply/UMA/>
Before using our product <https://en.cosel.co.jp/technical/caution/index.html>



Basic Characteristics Data

| Model | Circuit method | Switching frequency [kHz] | Input current [A] | Rated input fuse | Inrush current protection circuit | PCB/Pattern | | | Parallel operation |
|--------|-------------------|---------------------------|-------------------|------------------|-----------------------------------|-------------|--------------|--------------|--------------------|
| | | | | | | Material | Single sided | Double sided | |
| UMA30F | Flyback converter | 20 to 125 | 0.7 | 250V 2.5A | Thermistor | CEM-3 | Yes | | No |
| UMA60F | Flyback converter | 20 to 125 | 1.4 | 250V 2.5A | Thermistor | FR4 | | Yes | No |