

Power Inductor-Molding

Automotive



AD0000PWR-KIT JIS 2016, 2520 Size

Designer Kit Contents

Pulse - Std Power Part Number	L (mm)	W(mm)	T (mm)	SIZE Code (JIS)	Inductance (nH)	Tolerance (±%)	RDC(Ω) Max.	IDC(mA)Max.	Quantity
ADCC00201612R15MC1	2.0	1.6	1.2	2016	0.15	20	0.016	6.9	20
ADCC00201612R24MC1	2.0	1.6	1.2	2016	0.24	20	0.021	6.2	20
ADCC00201612R33MC1	2.0	1.6	1.2	2016	0.33	20	0.027	4.8	20
ADCC00201612R47MC1	2.0	1.6	1.2	2016	0.47	20	0.03	4.5	20
ADCC002016121R0MC1	2.0	1.6	1.2	2016	1	20	0.05	3.4	20
ADCC002016121R5MC1	2.0	1.6	1.2	2016	1.5	20	0.095	0.09	20
ADCC00252012R24MC1	2.5	2.0	1.2	2520	0.24	20	0.013	8.5	20
ADCC00252012R33MC1	2.5	2.0	1.2	2520	0.33	20	0.022	5.4	20
ADCC00252012R47MC1	2.5	2.0	1.2	2520	0.47	20	0.027	4.7	20
ADCC002520121R0MC1	2.5	2.0	1.2	2520	1	20	0.042	3.8	20
ADCC002520121R5MC1	2.5	2.0	1.2	2520	1.5	20	0.06	2.9	20
ADCC002520122R2MC1	2.5	2.0	1.2	2520	2.2	20	0.092	2.3	20


Power Inductor-Molding

Automotive




AD0000PWR-KIT JIS 2016, 2520 Size

Dimensions – Millimeters (Inches)

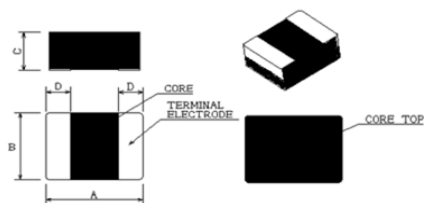

Dimensions in mm	
TYPE	201612
A	2.0±0.2
B	1.6±0.2
C	1.2 Max
D	0.6±0.3

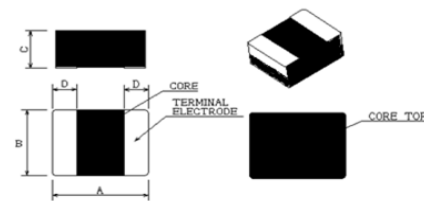

Dimensions in mm	
TYPE	252012
A	2.5±0.2
B	2.0±0.2
C	1.2 Max
D	0.6±0.3