

# Through Terminal Block, Ground Conductor Terminal Block TOPJOB® S; with Lever and Push-Button



## 6 (10) mm<sup>2</sup>; 2106 Series

### Technical Data

0.5 ... 6 (10) mm <sup>2</sup> ①	20 ... 8 AWG
800 V / 8 kV / 3 ②	600 V, 50 A ③
I <sub>N</sub> 41 A (55 A)	600 V, 50 A ④
Terminal block width: 7.5 mm / 0.295 inch	
13 ... 15 mm / 0.51 ... 0.59 inch	

### Technical Data

0.5 ... 6 (10) mm <sup>2</sup> ①	20 ... 8 AWG
800 V / 8 kV / 3 ②	600 V, 50 A ③
I <sub>N</sub> 41 A (55 A)	600 V, 50 A ④
Terminal block width: 7.5 mm / 0.295 inch	
13 ... 15 mm / 0.51 ... 0.59 inch	

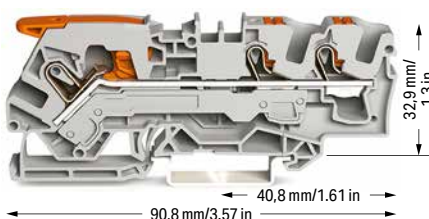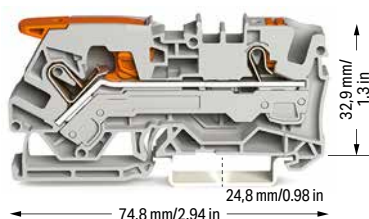

### 2-conductor through terminal block; with lever and push-button

Color	Item No.	Pack. Unit
gray ⑤	2106-5201 ④	25
blue ⑤	2106-5204 ③ ④	25

### 3-conductor through terminal block; with lever and push-button

Color	Item No.	Pack. Unit
gray ⑤	2106-5301 ④	25
blue ⑤	2106-5304 ③ ④	25

### 2-conductor ground terminal block; with lever and push-button

green-yellow ⑤	2106-5207 ④	25
----------------	-------------	----

### 3-conductor ground terminal block; with lever and push-button

green-yellow ⑤	2106-5307 ④	25
----------------	-------------	----

### Accessories; item-specific

#### End and intermediate plate; 1 mm thick

orange	2106-1292	100 (25)
gray	2106-1291	100 (25)

### Accessories; item-specific

#### End and intermediate plate; 1 mm thick

orange	2106-1392	100 (25)
gray	2106-1391	100 (25)

### Accessories; 2106 Series

Appropriate marking systems: WMB/WMB Inline/Marking strips

### Push-in type jumper bar; insulated; I<sub>N</sub> 41 A; light gray

2-way	2006-402	25
3-way	2006-403	25
4-way	2006-404	25
5-way	2006-405	25

### Push-in type jumper bar; insulated; I<sub>N</sub> 41 A; light gray

1 to 3	2006-433	25
1 to 4	2006-434	25
1 to 5	2006-435	25

### Star point jumper; insulated; I<sub>N</sub> = I<sub>N</sub> terminal block; light gray

1-3-5	2006-405/011-000	25
-------	------------------	----

### Lockout cap; for conductor entry and operating slot

gray	2006-191	25
------	----------	----

### Modular connector; snaps together; for jumper contact slot

gray	2006-511	50 (25)
------	----------	---------

### Spacer module; snaps together; bridges commoned terminal blocks

gray	2006-549	50 (25)
------	----------	---------

### Test plug adapter; for 4 mm Ø test plug

gray	2009-174	100 (25)
------	----------	----------

### Testing tap; for max. 2.5 mm<sup>2</sup>

gray	2009-182	100 (25)
------	----------	----------

### Marking strip; plain; 11 mm wide; 50 m reel

white	2009-110	1
-------	----------	---

### WMB marking card; white; 10 strips with 10 markers/card; 5 ... 5.2 mm stretchable

plain	793-5501	5
-------	----------	---

① Conductor range: 0.5 ... 10 mm<sup>2</sup> "s+f-st";  
Push-in termination: 2.5 ... 10 mm<sup>2</sup> "s" and  
2.5 ... 6 mm<sup>2</sup> "insulated ferrules; 12 mm"  
Depending on the conductor characteristic, a conductor  
with a smaller cross section can also be inserted  
via push-in termination.

② 800 V = rated voltage  
8 kV = rated impulse voltage  
3 = pollution degree  
(see Section 15)

③ Terminal blocks with a blue insulated housing are  
suitable for Ex i applications.

④ Terminal blocks with an Ex mark are suitable for Ex e II  
applications.  
550 V; 41 A  
33 A jumper  
(see Section 15)

Please observe the application notes:  
Jumpers, from page 185  
Testing accessories, from page 178  
Marking, from page 684

Approvals and corresponding ratings,  
visit [www.wago.com](http://www.wago.com)