


### 24 port 0.5U unpopulated FTP or UTP keystone panel:

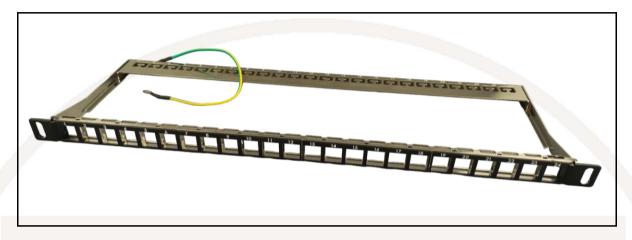

#### 24 port 0.5U unpopulated FTP or UTP keystone panel (FFK24mt0.5pt):

This 0.5U empty panel is ideal for high density mounting of 24 shielded or unshielded keystones. Accommodates wide range of keystones up to 18mm wide. Black fronted panel designed to match standard cabinet equipment.

#### Features:

- Suitable for keystones up to 18mm wide
- 0.5U construction enables double the space efficiency of standard panels
- Robust and high-quality construction
- Black face matches standard equipment but still suitable for both UTP and FTP
- Removable rear cable management bar can be easily snapped into place without the need for any tools or fixings.
- Available as pre-assembled or in flat pack version (FFK24mt0.5ptfp). Flat pack can be assembled in less than 3 minutes and takes less space on shelves, in vans and in kit bags.
- Panel includes: 2 sets of M6 black cage nuts and 25cm earth wire with fixing parts

#### Specifications:

Net weight (including primary packaging):

FFK24mt0.5pt: 488g FFK24mt0.5ptfp: 440g

• Dimensions (including primary packaging)

FFK24mt0.5pt: 500 x 66 x 30mm FFK24mt0.5ptfp: 510 x 50 x 40mm

Colour: black front with silver rear

Materials: Cold-rolled steel sheet, 1.5mm thickness

Front cover: ABS plastic

This panel is not suitable for use with TUK keystones SGKSsu+, SKmcbk/wh and SGKctbk/wh

TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London SW17 0BA




#### Packaging:

FFK24mt0.5pt: supplied assembled in individual carton then in box of 14 FFK24mt0.5ptfp: supplied flat pack in an individual carton then in box of 30


Commodity code: 85366990

**EAN:** FFK24mt0.5pt: 5055386511164 FFK24mt0.5ptfp: 5055386511171

Country of Origin: China

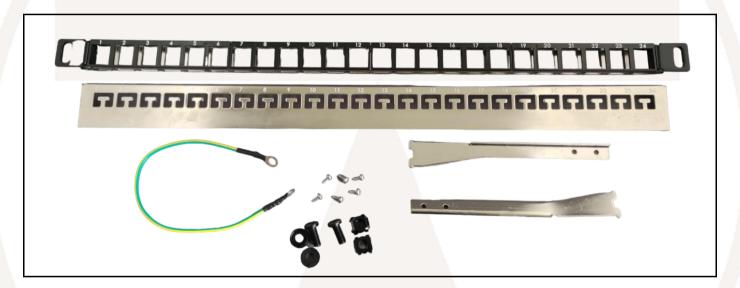


#### Illustrative Shot:

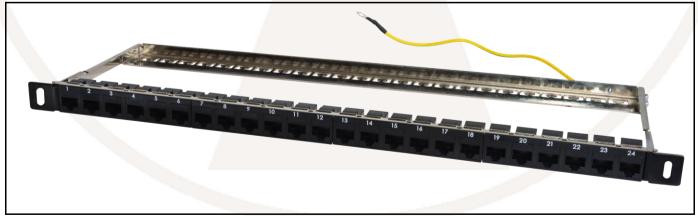




## ROHS Compliant Code:FFK24mt0.5pt

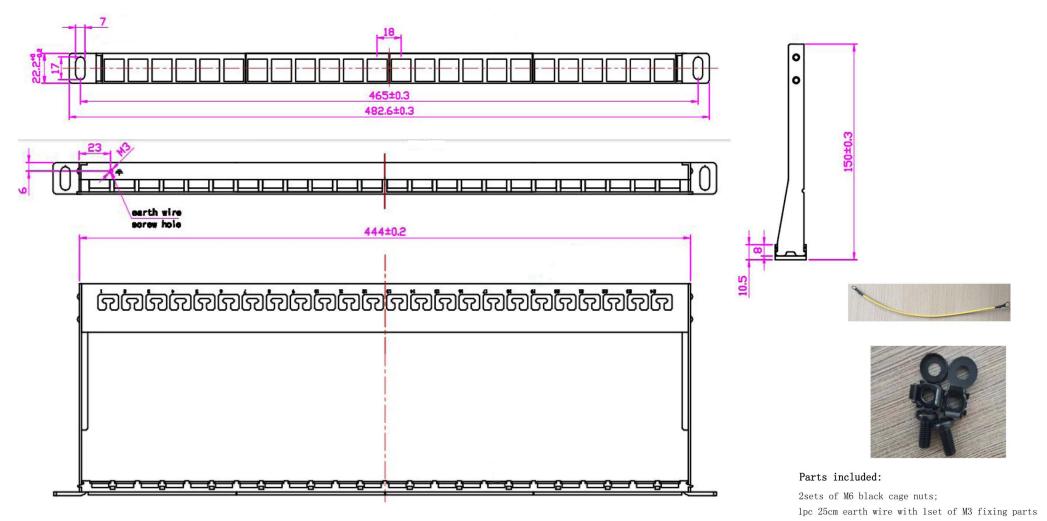



# 24 port 0.5u Panel Assembly Guide Code: FFK24mt0.5ptfp




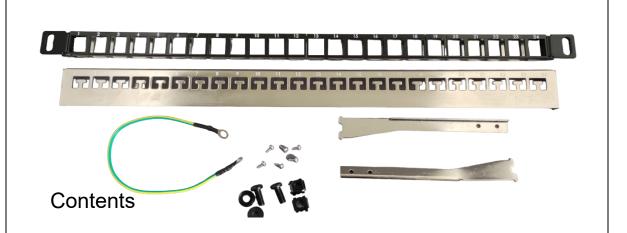





Use magnetic crosshead screwdriver to attach side arms with screws

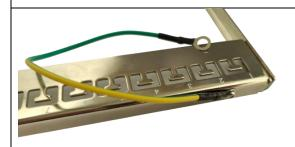

For shielded installation, attach earth lead. Note: ring terminals are *different* sizes; larger ring is M6 to allow connection in cabinet



Clip side arms into panel front



Completed FFK24mt0.5pt