

PRO-SIGNAL



PSG3416

WIRELESS AUDIO SYSTEM

IMPORTANT SAFETY INFORMATION

Please read these instructions carefully before use and retain for future reference.

- Check that the voltage indicated on the PSU rating plate is correct for the local mains supply.
- Do not expose to excessive heat or locate where damp or moisture may enter the device.
- Avoid use in an overly complex 2.4GHz wireless environment.

OVERVIEW


- This device can transmit audio from an externally connected via 3.5mm stereo jack or wireless source to up to 4 receivers over a distance of up to 30 meters.

WHAT'S IN THE BOX


- 1 transmitter and 1 receiver
- USB charger cable
- Instruction Manual.

FEATURES

Transmitter

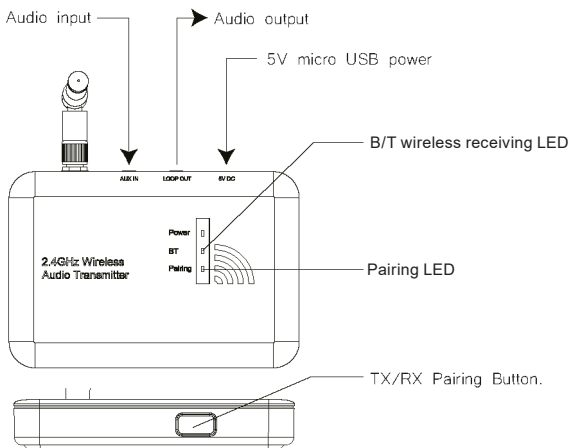

Receiver

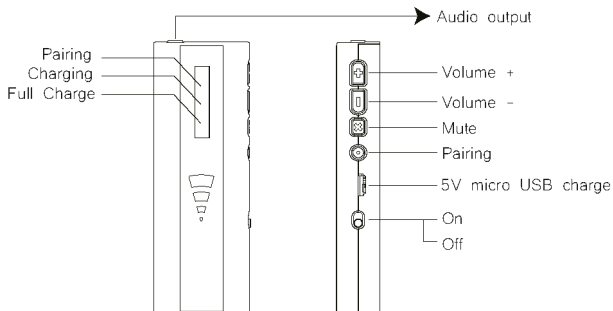

INSTALLATION

NOTE: The receiver(s) must first be fully charged before use for up to 1 hour and the PSU connected to the transmitter USB power socket and switched on at the mains.

- Initially, powering the transmitter on switches into bluetooth discovery mode.
- On your source device (smartphone etc), search for ID: Music BT. No code is required but if your device demands one, use "0000".
- The source device is now connected and ready to play audio once the receiver(s) have been paired.
- Press the pairing button on the transmitter. The transmitter LED starts to flash twice per second.
- Within 10 seconds, press the pairing button on a receiver. The pairing LED on the transmitter will become constantly lit to indicate pairing in progress.
- When successfully connected with the transmitter, the pairing LED on the receiver will flash once every 2.5 seconds.
- This indicates the device is waiting for a receiver to auto connect. Once pairing is successful the LED will remain lit continuously
- In this state, audio from the transmitter can be streamed to the receiver.
- Repeat for any additional receivers. Transmitter can be paired with up to 4 receivers.
- Alternatively source audio can be input via the 3.5mm stereo input jack and also looped out to monitor speakers if required.

MAINTENANCE

- Use a soft cloth to wipe off any dust. If the device is very dirty, use a damp cloth and wipe dry.
- Do not use any chemicals, abrasives or solvents that could damage the casing.

SPECIFICATIONS

Wireless audio transmission quality:	44.1kHz CD quality with Texas Instruments PPWTM point-to-point connection technology
Wireless distance:	up to 30 meters open site. Avoid to use in a overly complex 2.4GHz wireless environment.
Wireless version:	v4.2 with Qualcomm aptX, distance over 10 meters.
Power input (5VDC):	Power jack or 2-pin screw terminal.
Audio input/output	3.5mm stereo jack socket
Number of devices:	1 transmitter can pair with up to 4 receivers.
Receiver charging time:	1 hour charging run for 8 hours.

CPC Farnell declares that the radio equipment for wireless transmitter/receivers is in compliance with Radio Equipment Directive 2014/53/EU



INFORMATION ON WASTE DISPOSAL FOR CONSUMERS OF ELECTRICAL & ELECTRONIC EQUIPMENT.

When this product has reached the end of its life it must be treated as Waste Electrical & Electronic Equipment (WEEE). Any WEEE marked products must not be mixed with general household waste, but kept separate for the treatment, recovery and recycling of the materials used. Contact your local authority for details of recycling schemes in your area.

Made in Taiwan
Faraday Drive, Preston, PR2 9PP (UK)
Riverside One, Sir John Rogerson Quay, Dublin 2, D02 X576 (EU)
Man Rev 2.3