
PUSH WIRE® splicing connector; for solid conductors; max. 2.5 mm²; 5-conductor; transparent housing; yellow cover; Surrounding air temperature: max 60°C (T60); 2,50 mm²; transparent



https://www.wago.com/2273-205



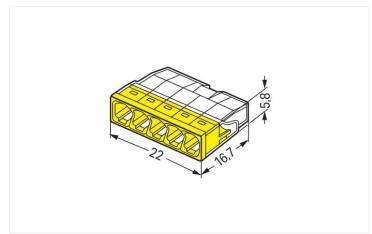

Color: 

transparent

Dimensions in mm

Push wire® splicing connector, 2273 Series, Push-in

Push wire® splicing connector (item number 2273-205) simplifies electrical installations. The 2273 Series PUSH WIRE® connectors for junction boxes provide safe, quick, and easy installations in any building, no matter the position or location. This splicing connector has a rated voltage of 450 V and can handle currents up to 24 A, making it suitable for high-load applications. Conductors should only be connected to push wire® splicing connector if their strip length is 11 mm. This product features conductor terminals and utilizes PUSH WIRE®. Our PUSH WIRE® connection offers a quick and simple solution for connecting solid conductors. The dimensions are 22 x 5.8 x 16.7 mm (width x height x depth). Push wire® splicing connector is suitable for conductor cross sections ranging from 0.5 mm² to 2.5 mm². Tin is used for coating the contact surfaces.

### **Notes** General safety instructions NOTICE: Observe installation and safety instructions! · Only to be used by electricians! Do not work under voltage/load! • Use only for proper use! · Observe national regulations/standards/guidelines! Observe technical specifications for the products! · Observe the number of permissible potentials! • Do not use damaged/dirty components! · Observe conductor types, cross-sections and strip lengths! · Insert conductor until it hits the product's backstop! • Use original accessories! To be sold only with installation instructions! Safety Information in grounded power lines

Electrical data			
Ratings per	I	EC/EN 6099	8
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	450 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Approvals per		UL 486C	
Use group	В	С	D
Rated voltage	-	-	-
Rated current	-	-	-



11 mm / 0.43 inches

Side-entry wiring

				•
Connection data				
Clamping units	5		Connection 1	
Total number of potentials	1		Connection technology	PUSH WIRE®
			Actuation type	Push-in
			Connectable conductor materials	Copper Aluminum
		Connectable conductor materials (note)	<b>Terminating Aluminum Conductors</b> WAGO Spring-Clamp Terminal Blocks are suitable for solid aluminum conductors up to 4 mm²/12 AWG if WAGO "Alu-Plus" Contact Paste 249-130 is used for termination.	
				"Alu-Plus" Contact Paste Advantages:
		<ul> <li>Automatically destroys the oxide film during clamping.</li> <li>Prevents fresh oxidation at the clamping point.</li> <li>Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block).</li> <li>Provides long-term protection against corrosion.</li> </ul>		
		For spring pressure connections with PU-SH WIRE® connection technology, <b>WAGO</b> recommends that the aluminum conductor first be cleaned and then immediately inserted into the clamping unit filled with "Alu-Plus" contact paste.		
		It is also possible to apply WAGO "Alu- Plus" <b>additionally</b> on the whole surface of the aluminum conductor before termi- nation.		
				Please note that the nominal currents must be adapted to the reduced conduc- tivity of the aluminum conductors:: 2.5 mm <sup>2</sup> = 16 A 4 mm <sup>2</sup> = 22 A
			Solid conductor	0.5 2.5 mm² / 20 16 AWG

Physical data	
Width	22 mm / 0.866 inches
Height	5.8 mm / 0.228 inches
Depth	16.7 mm / 0.657 inches

Strip length

Wiring direction

Material data	
Note (material data)	
	Information on material specifications can be found here
Color	transparent
Cover color	yellow
Material group	Illa
Insulation material (main housing)	Polycarbonate (PC)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact Plating	Tin
Fire load	0.039 MJ
Weight	1.6 g

https://www.wago.com/2273-205



Environmental requirements	
Ambient temperature (operation)	+60 °C
Continuous operating temperature	105 °C
Temperature marking per EN 60998	T60

Commercial data	
Product Group	7 (Push Wire Conn.)
PU (SPU)	1000 (100) pcs
Packaging type	Вох
Country of origin	DE
GTIN	4050821027874
Customs tariff number	85369010000

Product classification	
UNSPSC	39121409

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Ann	rovals	: / Ce	rtific:	ates

## General approvals





Approval	Standard	Certificate Name
cULus_Listed_667F Underwriters Laboratories Inc.	UL 486C	E69654
VDE VDE Prüf- und Zertifizie-	EN 60998	40029794

## Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

# Approvals for marine applications








Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	15-HG1419918-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	EN 60998	TAE000015T
LR Lloyds Register	EN 60998	LR22207029TA

https://www.wago.com/2273-205



# Downloads Environmental Product Compliance Compliance Search Environmental Product Compliance 2273-205

Documentation			
Bid Text			
2273-205	19.02.2019	xml 3.17 KB	$\overline{\downarrow}$
2273-205	17.05.2017	doc 24.50 KB	$\underline{\downarrow}$
ausschreiben.de 2273-205			$\overline{\downarrow}$

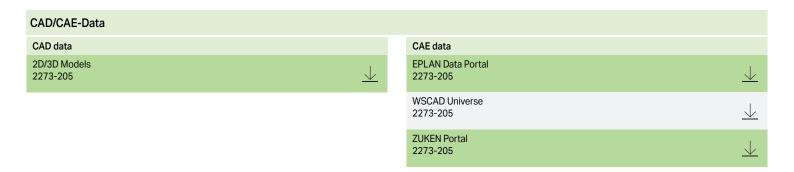

# 1 Compatible Products 1.1 Optional Accessories 1.1.1 Mounting adapter 1.1.1 Mounting accessories



Item No.: 2273-500 Mounting carrier; for single- and doublerow con.; 2273 Series; for DIN-35 rail mounting/screw mounting; orange

https://www.wago.com/2273-205



#### 1.1.2 Tool

## 1.1.2.1 "Alu-Plus" contact paste



Item No.: 249-130

Syringe; Contents: 20 ml Alu-Plus contact paste

#### **Installation Notes**

### **Conductor termination**









Strip solid conductor to 11 mm/0.43 inch (see marking).

The transparent housing shows if conductors are fully inserted; within the colored base, a clear port shows if the conductor's strip length is correct.

Conductors are correctly stripped if the clear port shows no bare conductor on the unprinted connector side. Picture shows center conductor with exceeded strip length.

Termination: Insert the stripped solid conductor until it hits the backstop.

Removal: Hold conductor to be removed and twist alternately left and right while pulling the connector.

## Testing



Testing via test port opposite to conductor entry.

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at::  $\underline{www.wago.com}$ 

Page 5/5 Version 02.04.2025