

HF13F

MINIATURE HIGH POWER RELAY



File No.:E133481



File No.:R50154518



File No.:CQC09002030028 (DC type)

CQC09002030029 (AC type)



Features

- 1C: 15A; 2C:10A switching capability
- Various terminals available
- Sockets available
- Conform to the CE low voltage directive
- 1 & 2 pole configurations
- UL insulation system: Class F(2 form A/2 form C)

RoHS compliant

CONTACT DATA

| | | |
|----------------------------------|---|---------------------|
| Contact arrangement | 1A,1C | 2A,2C |
| Contact resistance ¹⁾ | 100mΩ max.(at 1A 6VDC) | |
| Contact material | See"ORDERING INFORMATION" | |
| Contact rating (Res. load) | 15A 250VAC/30VDC | 10A 250VAC/30VDC |
| Max. switching voltage | 250VAC / 30VDC | |
| Max. switching current | 15A | 10A |
| Max. switching power | 3750VA/450W | 2500VA/300W |
| Mechanical endurance | 1 x 10 ⁷ OPS | |
| Electrical endurance | 1 Form C type: 1 x 10 ⁵ OPS (15A 250VAC, Resistive load, Room temp., 1s on 9s off) 1Form C type: 1 x 10 ⁵ OPS (15A 30VDC, Resistive load, Room temp., 1s on 9s off) 2 Form C type: 1 x 10 ⁵ OPS (10A 250VAC, Resistive load, Room temp., 1s on 9s off) 2 Form C type: 1 x 10 ⁵ OPS (10A 30VDC, Resistive load, Room temp., 1s on 9s off) | |

Notes: The data shown above are initial values.

CHARACTERISTICS

| | | |
|---|-------------------------|---------------------|
| Insulation resistance | 500MΩ (at 500VDC) | |
| Dielectric strength | Between coil & contacts | 1500VAC 1min |
| | Between open contacts | 1000VAC 1min |
| | Between contact sets | 1500VAC 1min |
| Operate time (at nomi. volt.) | 25ms max. | |
| Release time (at nomi. volt.) | 25ms max. | |
| Temperature rise (no-load, at nomi.volt.) | 60K max. | |
| Shock resistance | Functional | 98m/s ² |
| | Destructive | 980m/s ² |
| Vibration resistance | 10Hz to 55Hz 1mm DA | |
| Humidity | 5% to 85% RH | |
| Ambient temperature | -40°C to 70°C | |
| Termination | PCB, Plug-in | |
| Unit weight | Approx. 37g | |
| Construction | Dust protected | |

Notes: The data shown above are initial values.

COIL

| | |
|------------|--|
| Coil power | DC type: Approx. 0.9W to 1.1W AC type: Approx. 1.2VA to 1.8VA |
|------------|--|

COIL DATA

at 23°C

| 1 Pole | | | | |
|---------------------|--|---|--------------------------------|-------------------|
| Nominal Voltage VDC | Pick-up Voltage VDC max. ²⁾ | Drop-out Voltage VDC min. ²⁾ | Max. Voltage VDC ³⁾ | Coil Resistance Ω |
| 5 | 4.0 | 0.5 | 5.5 | 27.5x(1±10%) |
| 6 | 4.8 | 0.6 | 6.6 | 40x(1±10%) |
| 9 | 7.2 | 0.9 | 9.9 | 90x(1±10%) |
| 12 | 9.6 | 1.2 | 13.2 | 160x(1±10%) |
| 21 | 16.8 | 2.1 | 23.1 | 490x(1±10%) |
| 24 | 19.2 | 2.4 | 26.4 | 650x(1±10%) |
| 30 | 24.0 | 3.0 | 33.0 | 1000x(1±10%) |
| 36 | 28.8 | 3.6 | 39.6 | 1440x(1±10%) |
| 48 | 38.4 | 4.8 | 52.8 | 2600x(1±15%) |
| 60 | 48.0 | 6.0 | 66.0 | 4000x(1±15%) |
| 110 | 88.0 | 11.0 | 121 | 11000x(1±15%) |
| 125 | 100.0 | 12.5 | 137.5 | 14000x(1±15%) |
| 220 | 176.0 | 22.0 | 242 | 53750x(1±15%) |

| Nominal Voltage VAC | Pick-up Voltage VAC max. ²⁾ | Drop-out Voltage VAC min. ²⁾ | Max. Voltage VAC ³⁾ | Coil Resistance Ω |
|---------------------|--|---|--------------------------------|-------------------|
| 6 | 4.80 | 1.8 | 6.6 | 11.5x(1±10%) |
| 12 | 9.60 | 3.6 | 13.2 | 46x(1±10%) |
| 24 | 19.2 | 7.2 | 26.4 | 184x(1±10%) |
| 36 | 28.8 | 10.8 | 39.6 | 410x(1±10%) |
| 48 | 38.4 | 14.4 | 52.8 | 735x(1±10%) |
| 60 | 48.0 | 18.0 | 66.0 | 1100x(1±10%) |
| 120 ⁴⁾ | 96.0 | 36.0 | 132 | 4550x(1±15%) |
| 200 | 160 | 66.0 | 220 | 12950x(1±15%) |
| 220 | 176 | 72.0 | 242 | 14400x(1±15%) |
| 240 ⁴⁾ | 176 | 72.0 | 264 | 14400x(1±15%) |
| 277 | 221.6 | 83.1 | 304.7 | 23590x(1±15%) |



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2025 Rev. 1.00

COIL DATA

at 23°C

2 Pole

| Nominal Voltage VDC | Pick-up Voltage VDC max. ²⁾ | Drop-out Voltage VDC min. ²⁾ | Max. Voltage VDC ³⁾ | Coil Resistance Ω |
|---------------------|--|---|--------------------------------|-------------------|
| 5 | 4.0 | 0.5 | 5.5 | 27.5x(1±10%) |
| 6 | 4.8 | 0.6 | 6.6 | 40x(1±10%) |
| 9 | 7.2 | 0.9 | 9.9 | 90x(1±10%) |
| 12 | 9.6 | 1.2 | 13.2 | 160x(1±10%) |
| 21 | 16.8 | 2.1 | 23.1 | 490x(1±10%) |
| 24 | 19.2 | 2.4 | 26.4 | 640x(1±10%) |
| 30 | 24.0 | 3.0 | 33.0 | 1000x(1±10%) |
| 36 | 28.8 | 3.6 | 39.6 | 1440x(1±10%) |
| 48 | 38.4 | 4.8 | 52.8 | 2560x(1±15%) |
| 60 | 48.0 | 6.0 | 66.0 | 4000x(1±15%) |
| 110 ⁴⁾ | 80.0 | 11.0 | 121 | 12250x(1±15%) |
| 125 | 100 | 12.5 | 137.5 | 17360x(1±15%) |
| 220 | 176 | 22.0 | 242 | 53360x(1±15%) |

| Nominal Voltage VAC | Pick-up Voltage VAC max. ²⁾ | Drop-out Voltage VAC min. ²⁾ | Max. Voltage VAC ³⁾ | Coil Resistance Ω |
|---------------------|--|---|--------------------------------|-------------------|
| 6 | 4.8 | 1.8 | 6.6 | 11x(1±10%) |
| 12 | 9.6 | 3.6 | 13.2 | 44x(1±10%) |
| 24 | 19.2 | 7.2 | 26.4 | 177x(1±10%) |
| 36 | 28.8 | 10.8 | 39.6 | 400x(1±10%) |
| 48 | 38.4 | 14.4 | 52.8 | 708x(1±10%) |
| 60 | 48.0 | 18.0 | 66.0 | 1100x(1±10%) |
| 100 | 80.0 | 30.0 | 110 | 3400x(1±15%) |
| 110 ⁴⁾ | 80.0 | 33.0 | 121 | 3400x(1±15%) |
| 120 ⁴⁾ | 88.0 | 36.0 | 132 | 4080x(1±15%) |
| 200 | 160 | 60.0 | 220 | 13600x(1±15%) |
| 220 ⁴⁾ | 160 | 66.0 | 242 | 13600x(1±15%) |
| 240 ⁴⁾ | 176 | 72.0 | 264 | 16300x(1±15%) |
| 277 | 221.6 | 83.1 | 304.7 | 23590x(1±15%) |

Notes: 1) Under ambient temperature, applying more than 80% of rating voltage to coil, relay will take action accordingly. But in order to meet the stated product performance, please apply rated voltage to coil.

2) The data shown above are initial values.

3) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

4) A110:Nominal Voltage(100~110)VAC; A120:Nominal Voltage(110~120)VAC; A220:Nominal Voltage(200~220)VAC; A240:Nominal Voltage(220~240)VAC; 110:Nominal Voltage(100~110)VAC.

SAFETY APPROVAL RATINGS

| | | | |
|--------|--------------------|-------------------|----------------------|
| UL/CUL | AgSnO ₂ | 1 Form C/1 Form A | 15A 250VAC |
| | | | 15A 30VDC |
| | | 2 Form C/2 Form A | 10A 250VAC |
| | | | 10A 30VDC |
| | AgNi | 2 Form C/2 Form A | 1/3HP,240VAC/ 120VAC |
| | | | 10A 250VAC |
| TÜV | AgSnO ₂ | 2 Form C/2 Form A | 10A 250VAC,70°C |
| | | | 10A 30VDC,70°C |
| | | | 10A 250VAC,70°C |
| | AgNi | 2 Form C/2 Form A | 10A 250VAC,70°C |
| | | | 10A 30VDC,70°C |

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

| | | |
|------------------------------------|--|---------------|
| Type | HF13F / A 012 -2Z 1 3 D (XXX) | |
| Coil voltage form | A: AC Nil: DC | |
| Coil voltage | See "COIL DATA" | |
| Contact arrangement | 1H: 1 Form A 2H: 2 Form A 1Z: 1 Form C 2Z: 2 Form C | |
| Mounting termination ¹⁾ | 1: Socket 2: PCB 5: Flange-Mounting | |
| Contact material | 3: AgNi T: AgSnO ₂ 3G: AgNi+Au plated TG: AgSnO ₂ +Au plated | |
| LED | D: With LED Nil: Without LED J: with free wheeling diode DJ: with light emitting diode and with free wheeling diode | |
| Special code ²⁾ | XXX: Customer special requirement | Nil: Standard |

Notes: 1)No 1H2/1Z2 type products.


2)The customer special requirement express as special code after evaluating by Hongfa.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

HF13F/□□□□-1Z1□

Outline Dimensions

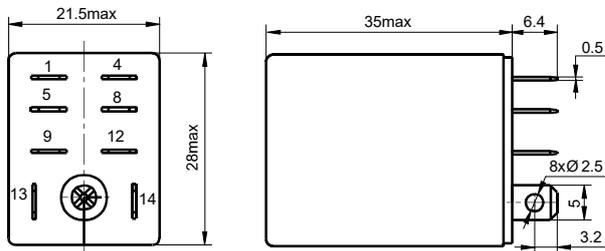


Wiring Diagram
(Bottom view)

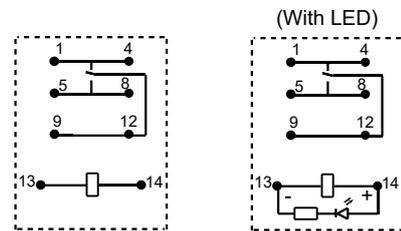


Remark: For AC parts with diode, the positive and negative pole markings on wiring diagram are not applicable.

HF13F/□□□□-2Z1□

Outline Dimensions

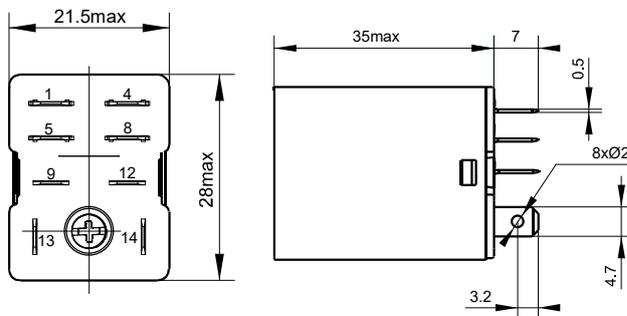

Wiring Diagram
(Bottom view)

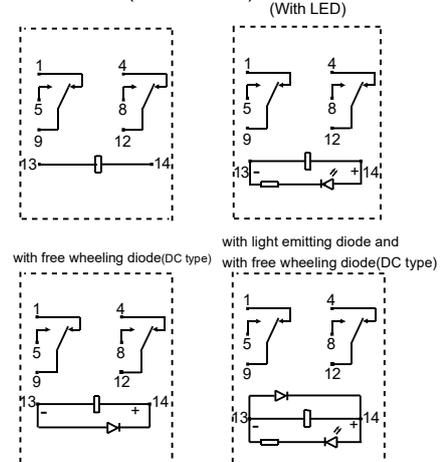


Remark: Fly-wheel products need to distinguish between the cathode. Only with LED products do not need to distinguish between the cathode. Only DC relays have freewheeling diodes.

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

HF13F/□□□□-2Z2□

Outline Dimensions

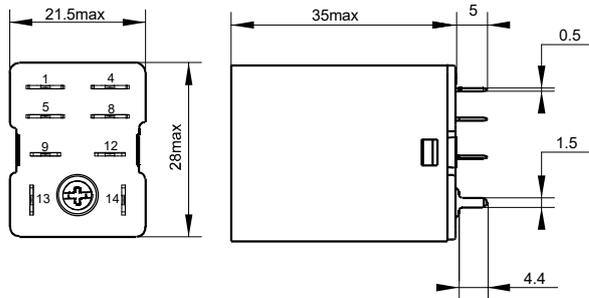


PCB Layout (Bottom view)



*: Please adjust the site of this diameter according to the actual application.


Wiring Diagram (Bottom view)

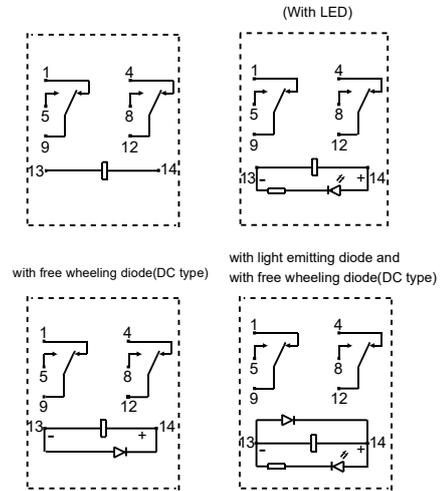


Remark: Fly-wheel products need to distinguish between the cathode. Only with LED products do not need to distinguish between the cathode. Only DC relays have freewheeling diodes.

HF13F/□□□□-2Z5□

Outline Dimensions

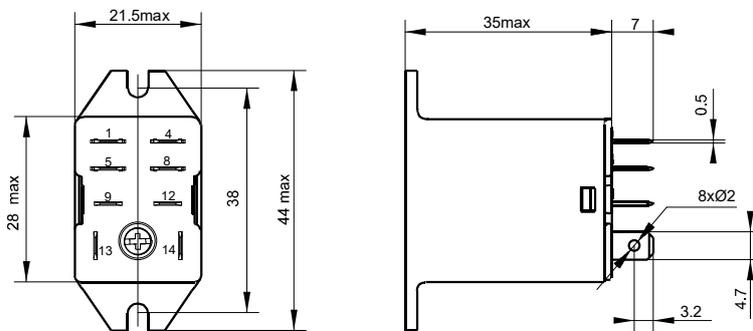


Mounting holes




Remark: 1) In case of no tolerance shown in outline dimension: outline dimension 1mm, tolerance should be $\pm 0.2\text{mm}$; outline dimension $>1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $>5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.

CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER
(1 Form C)

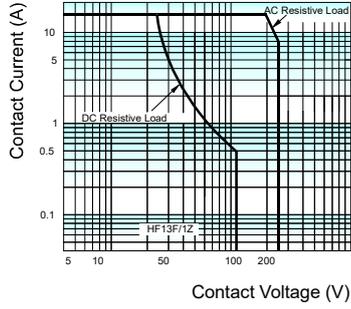

MAXIMUM SWITCHING POWER
(2 Form C)

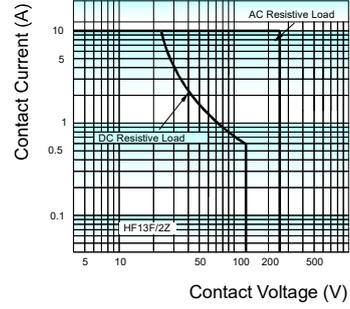

ENDURANCE CURVE
(1 Form C)

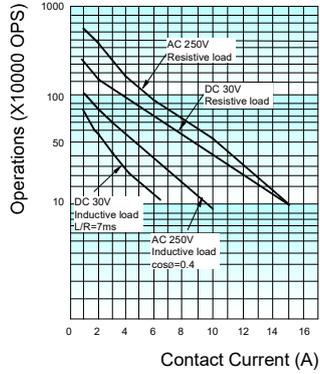

ENDURANCE CURVE
(2 Form C)

