



DS18 Series Sensors

Original Instructions

p/n: 128911 Rev. J

10-Apr-26

© Banner Engineering Corp. All rights reserved. www.bannerengineering.com

Contents

Chapter 1 Features 3
 Models 3
 Wiring Diagrams 5

Chapter 2 Specifications 6
 Dimensions 7
 Performance Curves..... 7

Chapter 3 Accessories..... 9


Chapter 4 Product Support and Maintenance11
 Repairs 11
 Banner Engineering Corp Limited Warranty11

Chapter Contents

Models	3
Wiring Diagrams	5

Chapter 1 Features

Miniature self-contained photoelectric sensors in a universal housing



Patent(s) issued or pending

- Multiple mounting options accommodate almost any mounting requirements
- Exceptional optical performance, comparable to larger “MINI-style” or barrel sensors
- Patented wide-beam retroreflective models for enhanced ease of alignment
- 10 to 30 V DC operation, with solid-state complementary NPN or PNP outputs, light operate or dark operate, depending on model
- Bright output LED indicates object is within the sensor’s field of view
- Rugged sealed housing with protected circuitry, rated IP67/NEMA 6
- All models feature 18 mm threaded barrel and base for easy, versatile mounting
- Choose 2 m (6.5 ft) or 9 m (30 ft) cable, or 4-pin M12 or M8 integral QD fitting or 150 mm (6 in) QD

WARNING:



- **Do not use this device for personnel protection**
- Using this device for personnel protection could result in serious injury or death.
- This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A device failure or malfunction can cause either an energized (on) or de-energized (off) output condition.

Models

Opposed mode sensors

Model	Sensing Beam	Connection	Output
DS186E	Infrared, 940 nm Effective Beam: 13 mm (0.5 in) Range: 20 m (65.6 ft)	2 m cable	N/A
DS186EQ5		150 mm (6 in) cable with a 4-pin M12 QD	N/A
DS186EQ8		4-pin integral M12 QD	N/A
DS18VN6R		2 m cable	NPN
DS18VP6R		2 m cable	PNP
DS18VP6RQ5		150 mm (6 in) cable with a 4-pin M12 QD	PNP

Polarized retroreflective mode sensors

Model	Sensing Beam	Connection	Output
DS18VN6LP	Visible red, 660 nm	2 m cable	NPN
DS18VN6LPQ5	Range: 3.5 m (11.4 ft)	150 mm (6 in) cable with a 4-pin M12 QD	NPN

Continued on page 4

Continued from page 3

Model	Sensing Beam	Connection	Output
DS18VN6LPQ8		4-pin integral M12 QD	NPN
DS18VP6LP		2 m cable	PNP
DS18VP6LP W/30		9 m cable	PNP
DS18VP6LPQ		150 mm (6 in) cable with a 4-pin M8 QD	PNP
DS18VP6LPQ5		150 mm (6 in) cable with a 4-pin M12 QD	PNP
DS18VP6LPQ7		4-pin integral M8 QD	PNP
DS18VP6LPQ8		4-pin integral M12 QD	PNP

Wide-angle polarized retroreflective mode sensors

Models	Sensing Beam	Connection	Output
DS18VP6LPW	Visible red, 660 nm Range: 3 m (9.8 ft)	2 m cable	PNP
DS18VP6LPWQ		150 mm (6 in) cable with a 4-pin M8 QD	PNP
DS18VP6LPWQ5		150 mm (6 in) cable with a 4-pin M12 QD	PNP

Fixed-field mode sensors

Model	Sensing Beam	Connection	Output
DS18VP6FF50	Visible red, 660 nm Range: 50 mm (2 in)	2 m cable	PNP
DS18VP6FF100	Visible red, 660 nm Range: 100 mm (4 in)	2 m cable	PNP
DS18VP6FF100Q		150 mm (6 in) cable with a 4-pin M8 QD	PNP
DS18VP6FF100Q5		150 mm (6 in) cable with a 4-pin M12 QD	PNP
DS18VP6FF100Q8		4-pin integral M12 QD	PNP


Any models not listed in the previous tables are no longer available for order. Obsolete models may include models with the following model number patterns:

- For the 9 m (30 ft) cable model, add suffix “W/30” to the 2 m model number (for example, DS186E W/30)
- For the 4-pin integral M12 QD model, add suffix “Q8” to the 2 m model number (for example, DS186EQ8)
- For the 4-pin integral M8 QD model, add suffix “Q7” to the 2 m model number (for example, DS186EQ7)
- For the 150 mm (6 in) cable with a 4-pin M12 QD model, add suffix “Q5” to the 2 m model number (for example, DS186EQ5)
- To order the 150 mm (6 in) cable with a 4-pin M8 QD model, add suffix “Q” to the 2 m model number (for example, DS186EQ)

Additional obsolete models include the following:

Model	Sensing Mode	Sensing Beam and Range	Connection	Output
DS18VN6LPW	Wide-angle polarized retroreflective	Visible red, 660 nm Range: 3 m (9.8 ft)	2 m cable	NPN
DX18VN6FF50 (all models)	Fixed-field	Visible red, 660 nm Range: 50 mm	All models	NPN
DS18VN6FF100 (all models)	Fixed-field	Visible red, 660 nm Range: 100 mm	All models	NPN

Wiring Diagrams

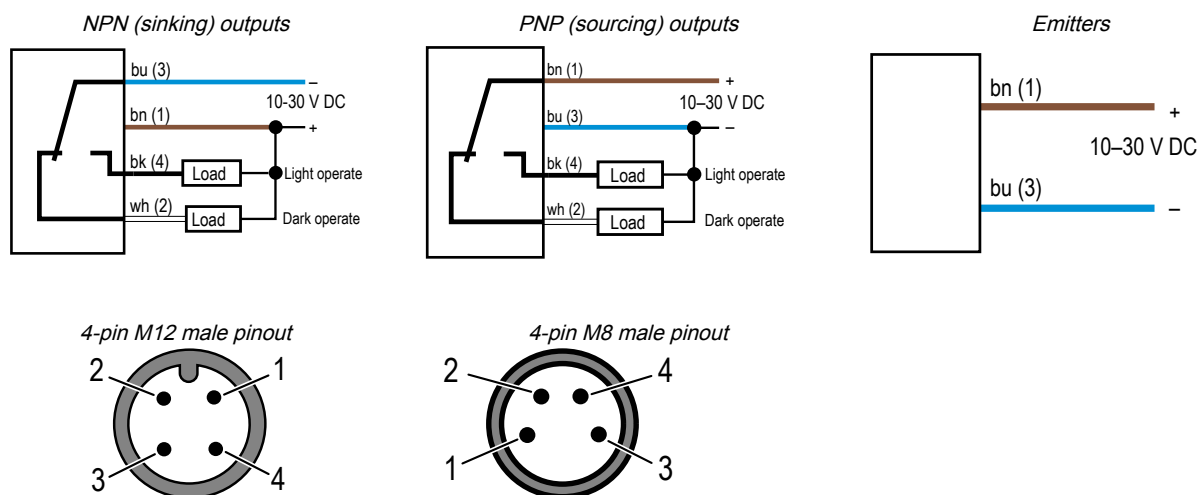

In light operate (LO) mode, the output is ON when the target returns the same or more light to the sensor and OFF when the sensor detects less light than the configured/taught target. In **opposed and retroreflective sensing modes**, light operate is active when the beam is unblocked. In **diffuse, fixed field, and adjustable field sensor modes**, light operate is active when the target is present.

In dark operate (DO) mode, the output is ON when the target returns less light to the sensor than the configured target and OFF when the sensor detects more light than the configured/taught target. In **opposed and retroreflective sensing modes**, dark operate is active when the beam is blocked. In **diffuse, fixed field, and adjustable field sensor modes**, dark operate is active when the target is absent.

Chapter Contents

Dimensions.....	7
Performance Curves	7

Chapter 2 Specifications

Supply Voltage

10 to 30 V DC (10% maximum ripple) at less than 20 mA, exclusive of load

Protected against reverse polarity and transient voltages

Output Response Time

Opposed Mode: 800 microseconds ON; 400 microseconds OFF

All others: 2 milliseconds ON/OFF

NOTE: 100 millisecond delay on power-up; outputs do not conduct during this time

Repeatability

Opposed Mode: 100 microseconds

All others: 350 microseconds

Indicators

Two LED indicators

Green on: Power on

Amber (back cover) on: Black wire (pin 4) is conducting; an object is within sensor's field of view

Output Configuration

Solid-state complementary; NPN or PNP (current sinking or sourcing), depending on model

Rating:

100 mA combined load from -20 °C to +60 °C (-4 °F to +140 °F)

Linearly derate combined load from 100 to 50 mA at temperatures from +60 °C to 70 °C (140 °F to 158 °F)

Off-state leakage current:

NPN: less than 200 µA @ 30 V DC (See the Application Note)

PNP: less than 10 µA @ 30 V DC

ON-state saturation voltage:

NPN: < 1.6 V @ 100 mA

PNP: < 3 V @ 100 mA

Protected against false pulse on power-up and continuous overload or short circuit of outputs

Construction

ABS housing, 3 mm mounting hardware included

Connections

2 m (6.5 ft) 4-wire PVC cable, 9 m (30 ft) 4-wire PVC cable, 4-pin M8 integral QD, 4-pin M12 integral QD, 4-pin M8 Pigtail QD, or 4-pin M12 Pigtail QD, depending on the model

Application Notes

NPN off-state leakage current is < 200 µA for load resistances > 3 kΩ or optically isolated loads. For load current of 100 mA, leakage is < 1% of load current.

Environmental Rating

IP67; UL Type 1

Operating Conditions

Temperature: -20 °C to +70 °C (-4 °F to +158 °F)

90% at +50 °C maximum relative humidity (non-condensing)

Certifications



Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Industrial
Control
Equipment
3TJJ

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.


Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.



Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	2.0	30	0.5

Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.




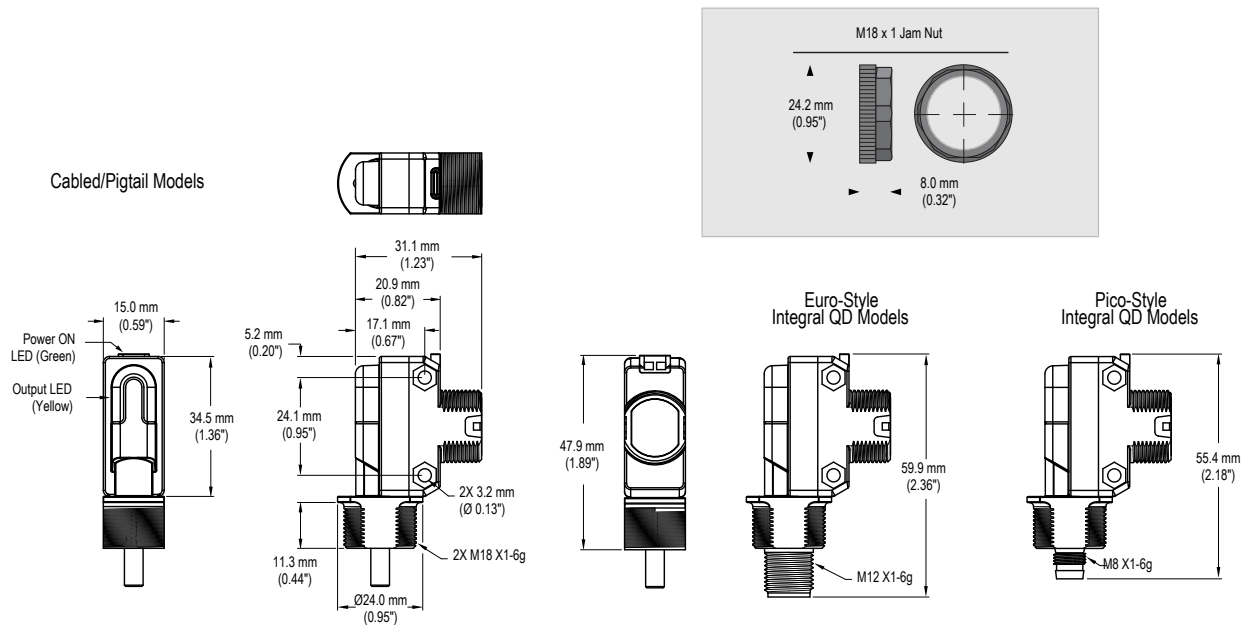


Performance Curves

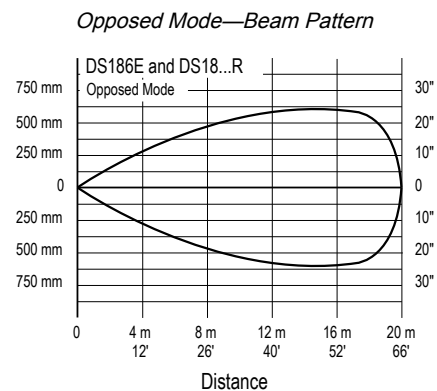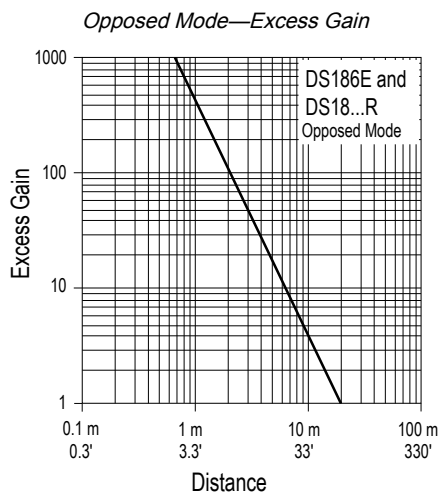

Continued on page 8

Continued from page 7

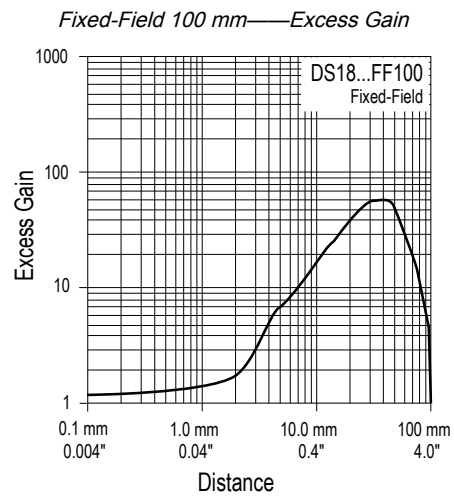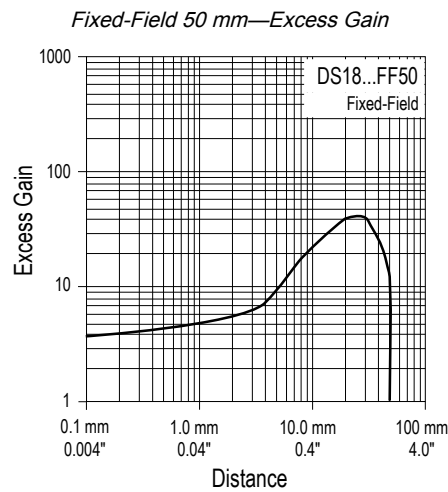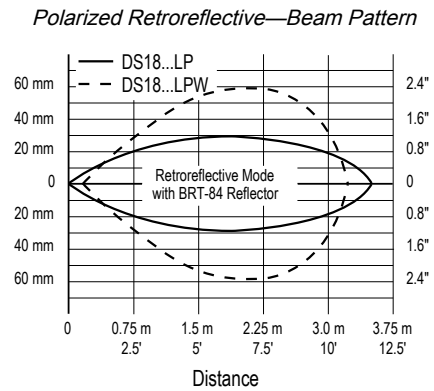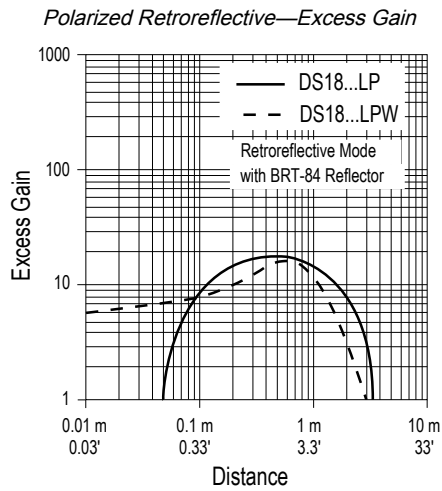

Fixed field performance is based on a 90% reflectance white test card

Chapter 3 Accessories


4-Pin Single-Ended M12 Female Cordsets					
Model	Length	Style	Dimensions	Pinout (Female)	
MQDC-406	2 m (6.56 ft)	Straight			1 = Brown 2 = White 3 = Blue 4 = Black 5 = Not used
MQDC-415	5 m (16.4 ft)				
MQDC-430	9 m (29.5 ft)				
MQDC-450	15 m (49.2 ft)	Right-Angle			
MQDC-406RA	2 m (6.56 ft)				
MQDC-415RA	5 m (16.4 ft)				
MQDC-430RA	9 m (29.5 ft)				
MQDC-450RA	15 m (49.2 ft)				

4-Pin Single-Ended Snap-on M8 Female Cordsets					
Model	Length	Style	Dimensions	Pinout (Female)	
PKG4-2	2.03 m (6.66 ft)	Straight			1 = Brown 2 = White 3 = Blue 4 = Black
PKW4Z-2	2 m (6.56 ft)	Right-Angle			

SMB18A

- Right-angle mounting bracket with a curved slot for versatile orientation
- 12-ga. stainless steel
- 18 mm sensor mounting hole
- Clearance for M4 (#8) hardware
- CAD Files: [DXF](#), [PDF](#), [IGS](#), [STP](#)

Hole center spacing: A to B = 24.2
Hole size: A = $\varnothing$ 4.6, B = 17.0 $\times$ 4.6, C = $\varnothing$ 18.5



See <http://www.bannerengineering.com> for additional 18 mm barrel mounting bracket options and for complete information on retroreflectors.

NOTE: Polarized sensors require corner cube-type retroreflectors.

Chapter Contents

Repairs 11

Banner Engineering Corp Limited Warranty 11

Chapter 4 Product Support and Maintenance

Repairs

Contact Banner Engineering for troubleshooting of this device. **Do not attempt any repairs to this Banner device; it contains no field-replaceable parts or components.** If the device, device part, or device component is determined to be defective by a Banner Applications Engineer, they will advise you of Banner's RMA (Return Merchandise Authorization) procedure.

IMPORTANT: If instructed to return the device, pack it with care. Damage that occurs in return shipping is not covered by warranty.

Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

