


Introduction

Ultrasonic sensors emit ultrasonic pulses, and by measuring the time of ultrasonic pulse reaches the object and back to the transducer, the distance of sensor from the target object is calculated. They are widely used in detecting displacement, thickness, distance, water level, material level and transparent objects.

The URM06 - Analog Ultrasonic sensor provides very short to long-range detection and ranging from 20cm ~ 10m, comes in a compact, robust PVC housing and matches 35mm electrical pipe mounting. It comes with analog interface and works at high output acoustic power. The ultrasonic sensor detects objects from 20cm to 1000cm and provides range information with 1cm resolution. The URM06 has 15 degree beam angle which has excellent receive sensitivity. And it works best when detecting soft targets. The similar sensors are widely used in professional mobile robot systems such as Pioneer robots.

The URM06 series sensors are the best ultrasonic sensor available in the market regarding its beam angle, sensitivity and accuracy.

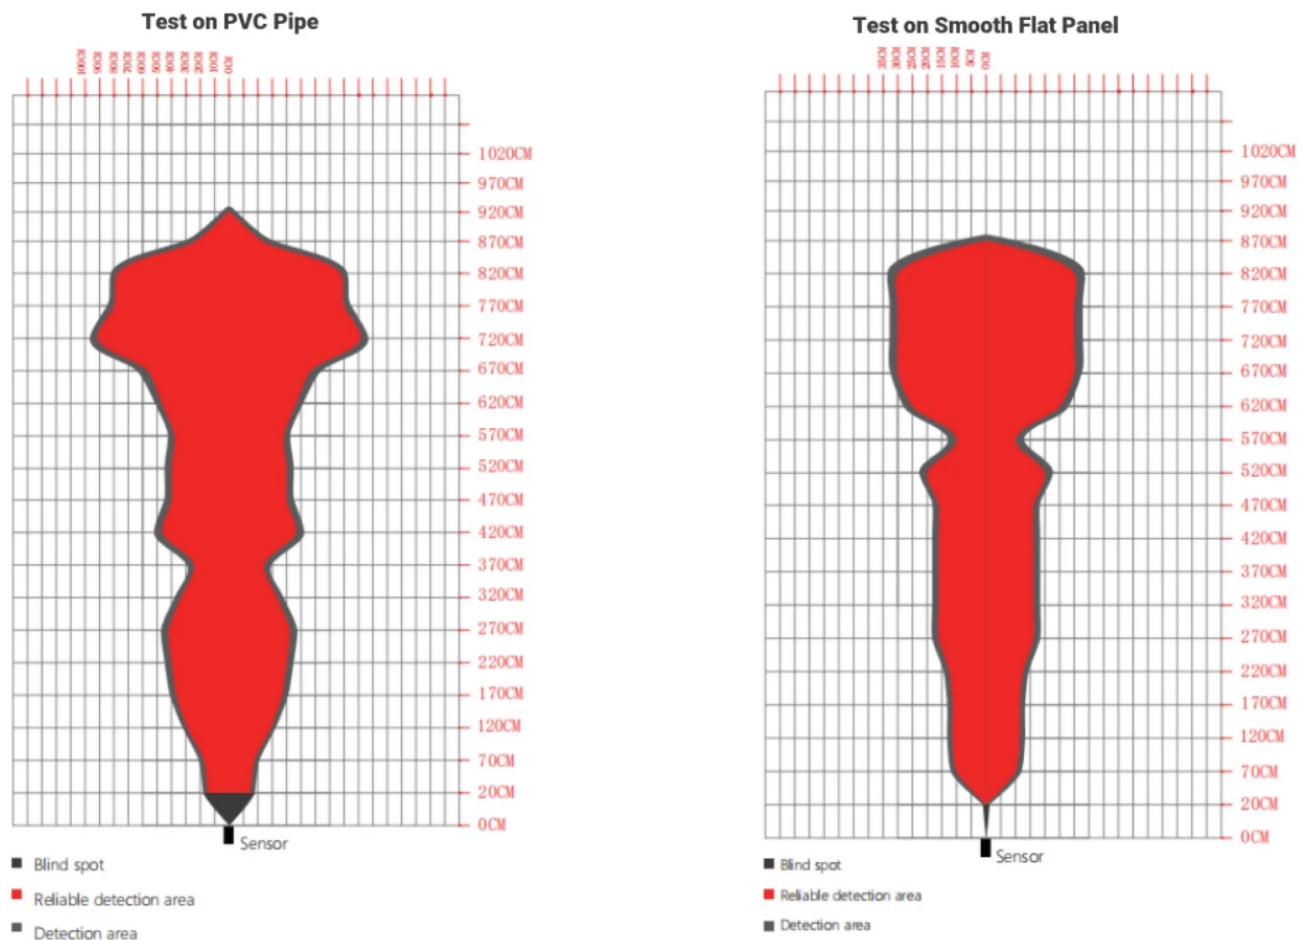

URM06 Beam Angle

If you need want to learn more about ultrasonic sensors, please [click here](#) to check DFRobot Ultrasonic Sensor Selection Guide.

Applications

- Robot navigation
- Obstacle avoidance
- Measuring distance devices
- Engineering measurement tools

- Industrial control system

Specification

- Working Voltage: 6V-12V (5V is acceptable but not recommended)
- Rated Current: 16mA
- Peek Current: 2A
- Interface: Analog
- Working Frequency: 49.5KHZ
- Working Temperature: -10°C ~ +70°C
- Detecting Angle: 15° (-6dB)
- Detecting Range: 20cm ~ 10m (7.87 ~ 393.70")
- Size: 50mm(diameter)*43mm(length) (1.97*1.69")
- Mounting Thread Diameter: 35mm (1.38")
- Weight: 50g

Shipping List

- URM06-Analog Ultrasonic x1

Documents

- [Product Wiki](#)