

LED Driver 36W

pro-ELEC

RoHS
Compliant



Description

This Plastic case Constant Voltage LED Drivers were designed for input voltages 220 through 240V AC and maintains a fully isolated output.

Our products are IP20 waterproof and can operate in humidity of up to 95%, while adhering with international safety standards. We've built-in automated protection; short circuit, over voltage, over current and over temperature protections. Each driver undergoes rigorous testing, and a full load burn in.

Features

- Flicker-free Design
- Constant Voltage
- Terminal block for quick connection
- CLASS II Power Supply
- IP20 Rated Case With
- 3 Years Warranty

Applications

- Commercial Lighting
- Indoor Lighting
- Industrial Lighting
- Retail Lighting

Specification

Input

Rated Voltage Range	: 220-240V AC
Voltage Range ⁶	: 198-264V AC
Frequency Range	: 50/60Hz
AC Current	: 0.3A/230V AC (Full Load)
Power Factor ²	: PF>0.95/115V AC PF>0.93/230V AC
THD	: <20%
Efficiency ²	: 88% / 88.5%
Inrush Current	: Cold Start 65A/200us at 230V AC
Leakage Current	: <0.25mA/230V AC
No Load Power Consumption	: <0.5W

Output

DC Voltage	: 12V / 24V
Rated Current	: 3A / 1.5A
Rated Power	: 36W
Ripple & Noise(max.) ³	: 400mV/m-p
Voltage Tolerance ¹	: ±5%
Line Regulation ¹	: ±3%
Load Regulation ¹	: ±5%
Pst	: <1.0
SVM	: <0.4
Dimming Type	: NO
Dimming Range	: NO
Setup Time ⁷	: 1.0s/115V AC 230V AC (Full Load)

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-ELEC

MCBS

Circuit breaker type : B16 / B20
Number of drivers : 2 / 3

Protection

Over Current : 110~180%
Hiccup mode , recovers automatically after fault condition is removed.
Short Circuit : Auto Restore.
Over Voltage : 13~15.6V / 26~31.2V
Shut down o/p voltage, re-power on to recover.
Over Temperature : Auto Restore.
Surge Capacity : L-N:1KV

Ambient

Working Temp. : Ta:-20~+45°C (Please refer to "Derating Curve" section)
Max. Case Temp. : Tc:85°C
Working Humidity : 20~95%RH Non-condensing
Storage Temp. Humidity : -40~+85°C, 10~95%RH Non-condensing
Temp. Coefficient : $\pm 0.03\%/(0\sim 40^{\circ}\text{C})$
Vibration : 10 ~ 500Hz, 5G 12Min./1cycle, period for 72Min. each along X, Y, Z axes

Life

Lifetime : >26280h@Tc=40°C, full load
MTBF : 274.6Khrs min. MIL-HDBK-217F(25°C)

Safety

Withstand Voltage : I/P-O/P: 3.75KV AC/1Min.
Isolation Resistance : I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500V DC / 25°C/ 70% RH

Other

Dimensions (L × W × H) : 147 × 48 × 24mm
Packing : 0.24kg/pcs; 37.5 × 33 × 10 cm; 100pcs/carton
Protection Class : Class II

Note


1. Tolerance: includes set up tolerance, line regulation and load regulation.
2. Tested at full load, 230V AC. Refer to "Power Factor" and "Efficient" curve graphs.
3. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
4. Calculate the model's average efficiency for each test voltage by testing at 100%, 75%, 50%, and 25% of rated current and then computing the simple arithmetic average of these four values.
5. All parameters NOT specially mentioned are measured at nominal voltage input, rated load and 25°C of ambient temperature.
6. De-rating may be needed under low input voltages. Please refer to "Static Characteristic" sections for details.
7. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
8. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

LED Driver

36W


pro-ELEC

Dimensions

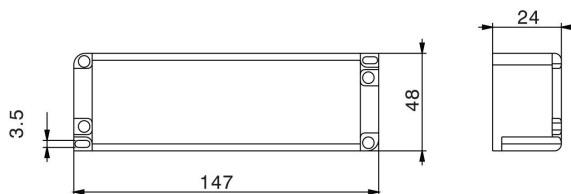

Width:48mm Height:24mm Length:147mm

Wiring Diagram

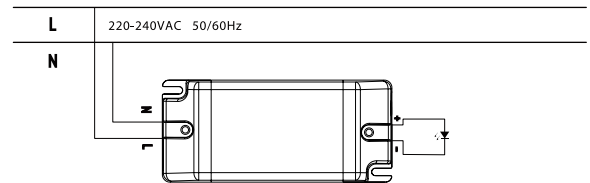


Technical Specification


Input : HO5RN-F 2*1.0m² VDE
Output : SVT 22/24AWG*2C 105 300V
Operating Temperature : -20 to +45°C
Protection Rating : IP20

Feature Curves


Derating Curve

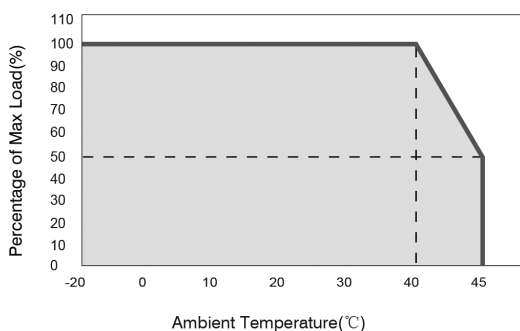


Static Characteristics

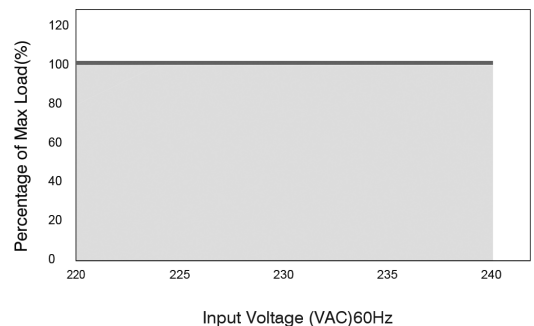

Power Factor Curve

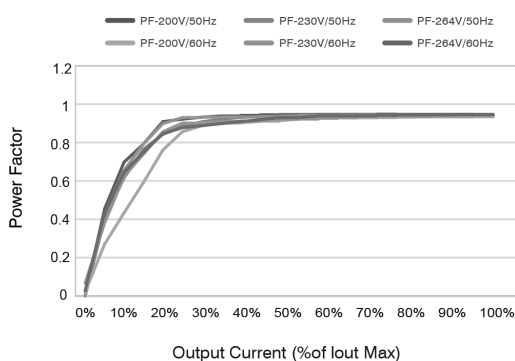

Efficiency Curve

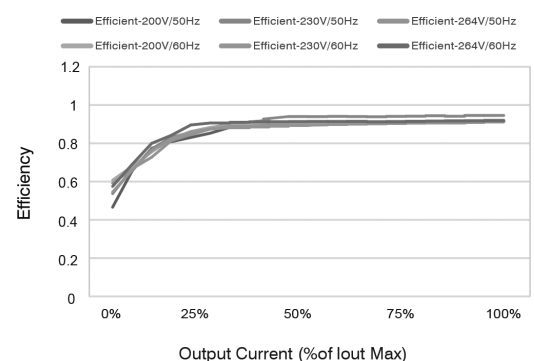

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-ELEC

LED Driver

36W

pro-ELEC

Part Number Table

Description	Part Number
LED Driver, 12V, 3A, 36W	PELL0540
LED Driver, 24V, 1.5A, 36W	PELL0541

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-ELEC is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

pro-ELEC