




NPN General Purpose Amplifier multcomp^{PRO}

RoHS
Compliant



SOT-23

Features:

- High current gain.
- Excellent h_{FE} linearity .
- Low noise between 30Hz and 15kHz.
- For AF input stages and driver applications.

Applications:

- General purpose switching and amplification.

Maximum Ratings: at 25°C unless otherwise specified.

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	30	V
Collector-Emitter Voltage	V_{CEO}	30	
Emitter-Base Voltage	V_{EBO}	5	
Collector Current -Continuous	I_C	0.1	A
Collector Dissipation	P_C	200	mW
Junction and Storage Temperature	T_j, T_{stg}	-65 to +150	°C

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min.	Max.	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	30		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	30		
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 1\mu\text{A}, I_C = 0$	5		
Collector cut-off current	I_{CBO}	$V_{CB} = 30\text{V}, I_E = 0$		0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$		0.1	

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp^{PRO}

NPN General Purpose Amplifier **multicomp**PRO

Parameter	Symbol	Test conditions	Min.	Max.	Unit
DC current gain	h_{FE}	$V_{CE} = 5V, I_C = 2mA$	200 420	450 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 100mA, I_B = 5mA$		0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 100mA, I_B = 5mA$		1.1	
Transition frequency	f_T	$V_{CE} = 5V, I_C = 10mA, f = 100MHz$	100		MHz

Typical Characteristics: $T_A = 25^\circ C$ unless otherwise specified

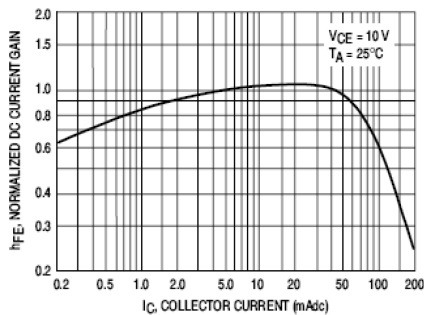


Figure 1. Normalized DC Current Gain

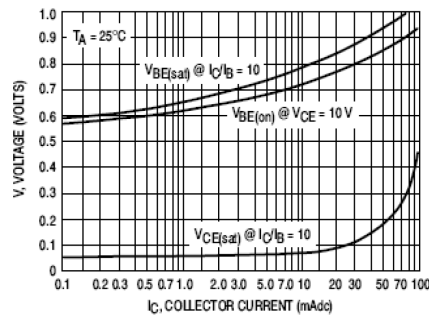


Figure 2. "Saturation" and "On" Voltages

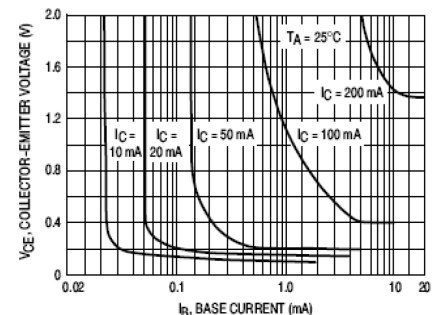


Figure 3. Collector Saturation Region

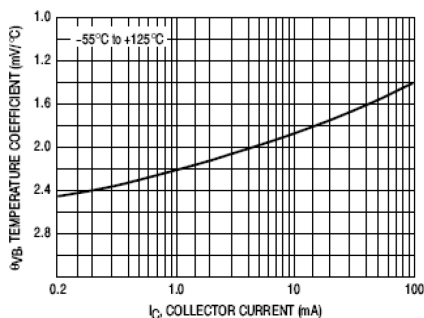


Figure 4. Base-Emitter Temperature Coefficient

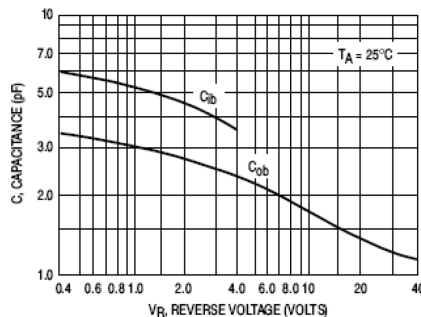


Figure 5. Capacitances


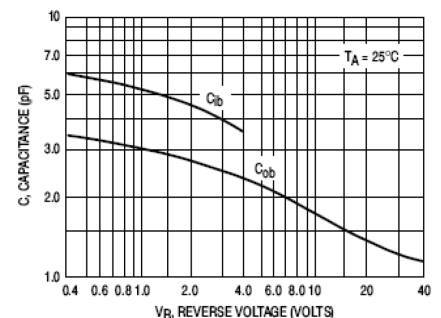


Figure 5. Capacitances

NPN General Purpose Amplifier **multicomp**PRO


Package Outline:

Plastic surface mounted package

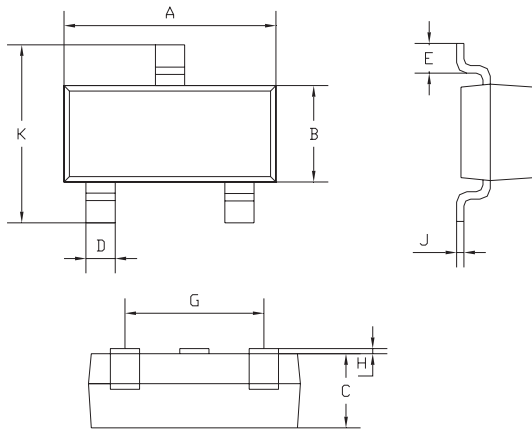

SOT-23		
Dim.	Min.	Max.
A	2.85	2.95
B	1.25	1.35
C	1.0 Typical	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1 Typical	
K	2.35	2.45

Soldering Footprint

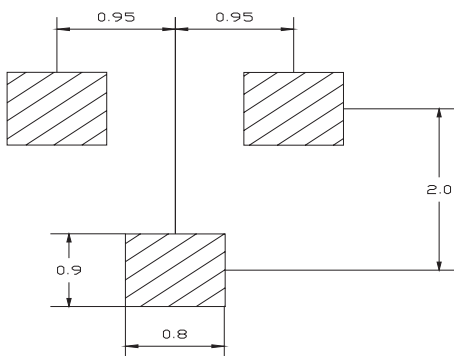

Marking Code

BC848B-TR	1J/1K/1L
BC848C-7-F	

Part Number Table

Description	Part Number
Transistor, NPN, 30V, 100mA, SOT23	BC848B-TR
	BC848C-7-F

Dimensions : Millimetres

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicompPRO