
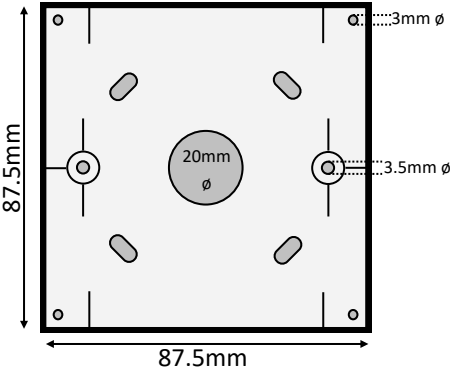
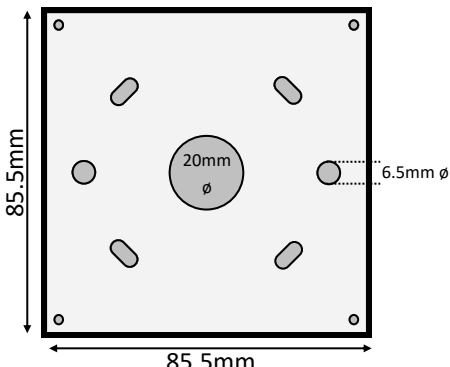
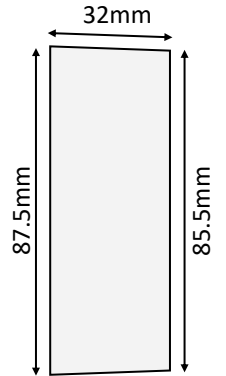

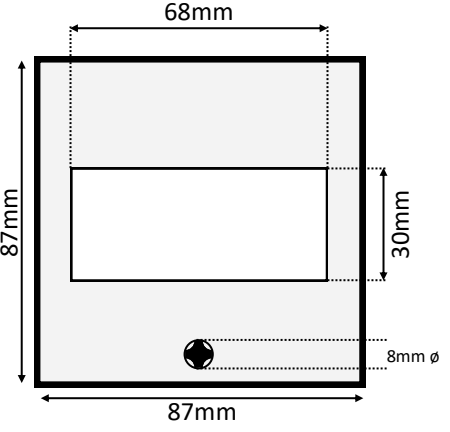
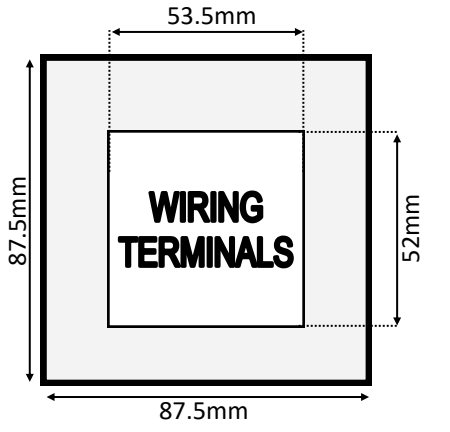


BACK BOX	FRONT VIEW 	REAR VIEW 	SIDE VIEW 	DESCRIPTION Surface Call Point POLES 1—Single pole unit Common, N/O, N/C wiring on each pole as below Diagram shows call point in set, untriggered position 
	CALL POINT FRONT 			ACTIVATION Microswitch/Resettable Plate Microswitch/'Like glass' Insert Key provided WATERPROOFING None LED None TEMPERATURE RANGE -40 to +85 degrees Celcius ELECTRICALLY RATED AS FOLLOWS 50VDC/5A MAX 250VAC/3A MAX

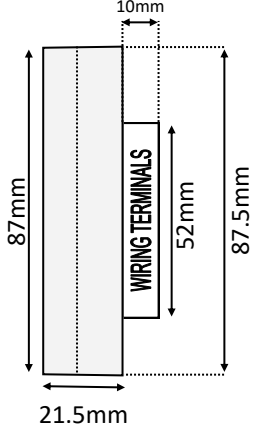

KNIGHT

FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate

Cardiff UK CF24 5TH

Tel: +44 (0) 2920 488 129

Fax: +44(0) 2920 489 132

Drawing #: MX54

Drawn: Gareth Carpenter

Date: 01/10/2025

Revision: 3

All dimensions in mm

Do not scale



© Knight Fire & Security Products Ltd

All cases of infringement will be pursued.

NOTES REGARDING PART CODES:

The MX54 can be produced to various specifications. Use the below table as a guide on how the part code will affect the end product:

EXAMPLES:

MX54SYSC: Single pole surface call point in yellow, resettable, with cover
 MX54SG: Single pole surface call point in green, break plate, no cover

	S / F	W/G/Y/B/R	S	C
MX54	Surface	White	Resettable plate	With cover
		Green		
	Flush	Yellow	If omitted: Breakable plate	If omitted: Without Cover
		Blue		
		Red		




CALL POINT FRONT



CALL POINT REAR

NOTE: SINGLE POLE VARIANT SHOWN

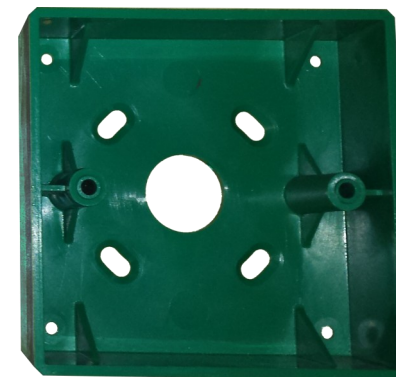

CALL POINT BACK BOX



KNIGHT
FIRE & SECURITY

Unit 84 Seawall Road Ind. Estate
 Cardiff UK CF24 5TH
 Tel: +44 (0) 2920 488 129
 Fax: +44(0) 2920 489 132

Drawing #: MX54
 Drawn: Gareth Carpenter
 Date: 01/10/2025
 Revision: 3

All dimensions in mm
 Do not scale



© Knight Fire & Security Products Ltd
 All cases of infringement will be pursued.