
Standard Inductive Sensors


PS2-12GI50-E2-V1_CE



Dimensions(Unit:mm)

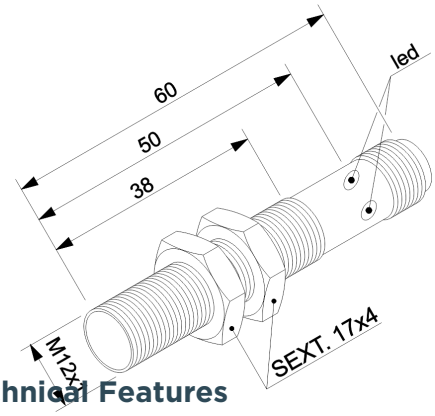

Electrical Connection

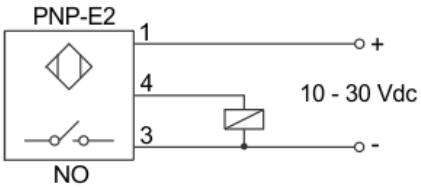

Technical Features

Signaling	
Signalling	Micro led on connector
Data Output	
Electrical connection	DC - PNP
Contact Type	NO
Max. switching current	200 mA
Output protection	Short circuit and reverse
Sensor voltage drop (load powered)	<2 V
Max. switching frequency	800 Hz
Electrical Characteristics	
Supply voltage	10 to 30Vdc
Ripple	±10 %
Current consumption	<10 mA
Electrical Connection	
Electrical connection	Connector - 4 pins
Housing	
Enclosure	threaded; brass with nickel plating
Tube length options	70 mm

Operating temperature	- 25 °C to + 70 °C
Protection class	IP67, IP69K
Housing options	GX (stainless steel), GT (PTFE), GP (plastic)
Tube length	50 mm
Recommended tightening torque	3 Nm
Mechanical Characteristics	
Diameter	M12
Sensing distance Sn	02 mm
Mouting	Flushed
Hysteresis	± 5 %
Repeatability	<0,01 mm
Operational distance	1,62 mm
Standard object	12x12 mm
Weight	25 g
Thread type	M12 x 1 mm
Application	Common industrial areas ou Atmosferas com poeiras combustíveis

ORDERING DETAILS

Description	TE Part Number
PS2-12GI50-E2-V1_CE	**6000005405-SE**

Accessory: Injected cables - M12 Connectors

Part Number	Model	Mounting	Number of contacts	Electrical configuration	Number of wires
5000004847-SE	CF-V1R/2	Straight	4 contacts	DC	4 wires

Accessory: Controls - KMV Line

Part Number	Model	No channels	Application	Supply voltage	Power consumption
52920552-SE	KMV-100/110-220 Vac	Single channel	Source with relay to sensor	110Vac or 220Vac	1 VA at 110 Vca and 1.7 VA at 220 Vca

Accessory: Security - Connector Safety Lock

Part Number	Model	Function	Applicable to	Enclosure material	Marking
5000006962-SE	CP-V1-Ex	Safety lock	equipment with M12 connectors		

Accessory: Converter - PNP > NPN Singal Converter

Part Number	Model	Assembly	Number of contacts	Electrical configuration	Number of wires
5000009969-SE	CF-V190/2PU-PNP>NPN	90°	4 contacts	DC ? PNP/NPN	4 wire

Accessory: Bracket - Bracket for Tubular Sensors

Part Number	Model	Application	Material	Fixation

5000010247-SE	MS-12	assembly of M12 tubular sensors	304 stainless steel	through included M5x1 screws

te.com

©2026 TE Connectivity plc. family of companies. All Rights Reserved.

TE Connectivity, TE, TE connectivity (logo), and EVERY CONNECTION COUNTS, Schaffner and Schaffner MORE POWER TO YOU are trademarks owned or licensed by TE Connectivity plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.
While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect,or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

03/26 ED