FAIRCHILD


SEMICONDUCTOR TM


DM7445 BCD to Decimal Decoders/Drivers

General Description

These BCD-to-decimal decoders/drivers consist of eight inverters and ten, four-input NAND gates. The inverters are connected in pairs to make BCD input data available for decoding by the NAND gates. Full decoding of BCD input logic ensures that all outputs remain off for all invalid (10–15) binary input conditions. These decoders feature high-performance, NPN output transistors designed for use as indicator/relay drivers, or as open-collector logic-circuit drivers. The high-breakdown output transistors are compatible for interfacing with most MOS integrated circuits.

Connection Diagram





March 19	998
----------	-----

Features

- Full decoding of input logic
- 80 mA sink-current capability
- All outputs are off for invalid BCD input conditions

Function Table

No.		Inp	outs		Outputs									
	D	С	в	Α	0	1	2	3	4	5	6	7	8	9
0	L	L	L	L	L	Н	Н	Н	Н	Н	Н	Н	Н	Н
1	L	L	L	н	н	L	н	н	Н	н	н	н	н	Н
2	L	L	н	L	н	н	L	н	Н	н	н	н	н	Н
3	L	L	Н	н	н	Н	Н	L	Н	Н	Н	Н	Н	н
4	L	н	L	L	н	н	н	н	L	н	н	н	н	Н
5	L	Н	L	н	н	Н	Н	Н	Н	L	Н	Н	Н	Н
6	L	н	н	L	н	н	н	н	Н	н	L	н	н	Н
7	L	н	н	н	н	н	н	н	Н	н	н	L	н	Н
8	н	L	L	L	н	н	н	н	Н	н	н	н	L	Н
9	н	L	L	н	н	Н	Н	Н	Н	Н	Н	Н	Н	L
Ι	н	L	Н	L	н	Н	Н	Н	Н	Н	Н	Н	Н	Н
Ν	н	L	н	н	н	н	н	н	Н	н	н	н	н	Н
V	н	н	L	L	н	н	н	н	Н	н	н	н	н	Н
А	н	Н	L	н	н	Н	Н	Н	Н	Н	Н	Н	Н	н
L	н	Н	Н	L	н	Н	Н	Н	Н	Н	Н	Н	Н	н
Т	н	н	н	н	н	н	н	н	Н	Н	н	н	н	н
D														

H = High Level (Off), L = Low Level (On)

© 1998 Fairchild Semiconductor Corporation DS006517

Absolute Maximum Ratings (Not	ie 1)	Operating Free Air Temperature Range	
Supply Voltage	7V	DM54	–55°C to +125°C
Input Voltage	5.5V	DM74	0°C to +70°C
Output Voltage	30V	Storage Temperature Range	–65°C to +150°C

Recommended Operating Conditions

Symbol	Parameter		DM5445		DM7445			Units	
		Min	Nom	Max	Min	Nom	Max	1	
V _{cc}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V	
V _{IH}	High Level Input Voltage	2			2			V	
V _{IL}	Low Level Input Voltage			0.8			0.8	V	
V _{он}	High Level Output Voltage			30			30	V	
I _{ol}	Low Level Output Current			20			20	mA	
T _A	Free Air Operating Temperature	-55		125	0		70	°C	

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditi	ons	Min	Typ (Note 2)	Max	Units	
<u> </u>			10		(Note 2)	4.5		
VI	Input Clamp Voltage	$V_{CC} = Min, I_{I} =$				-1.5	V	
ICEX	High Level Output	V_{CC} = Min, V_{O}	= 30V			250	μA	
	Current	$V_{IL} = Max, V_{IH}$	= Min					
V _{OL}	Low Level Output	V _{CC} = Min, I _{OL}	= Max		0.2	0.4		
	Voltage	V _{IH} = Min, V _{IL} =	= Max				V	
		I _{OL} = 80 mA			0.5	0.9]	
		V _{CC} = Min						
I _I	Input Current @ Max	V _{CC} = Max, V _I	= 5.5V			1	mA	
	Input Voltage							
I _{IH}	High Level Input Current	V _{CC} = Max, V _I	= 2.4V			40	μA	
I _{IL}	Low Level Input Current	V _{CC} = Max, V _I	= 0.4V			-1.6	mA	
I _{cc}	Supply Current	V _{CC} = Max	DM54		43	62	mA	
		(Note 3)	DM74		43	70	1	


Switching Characteristics


at V_{CC} = 5V and T_A = 25°C (See Section 1 for Test Waveforms and Output Load)


Symbol	Parameter	Conditions	Min	Max	Units
t _{PLH}	Propagation Delay Time	C _L = 15 pF		49.5	ns
	Low to High Level Output	R _L = 100Ω			
t _{PHL}	Propagation Delay Time			49.5	ns
	High to Low Level Output				


Note 2: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 3: $\ensuremath{\mathsf{I_{CC}}}$ is measured with all inputs grounded and all outputs open.

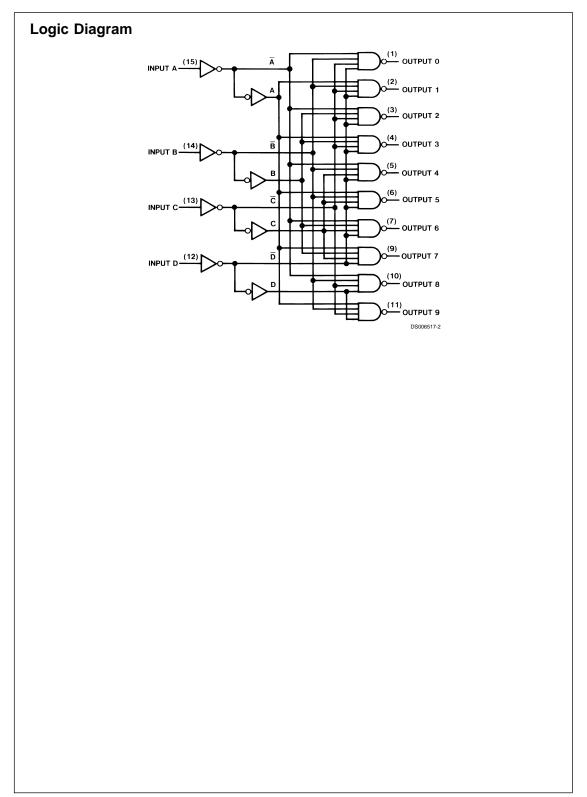

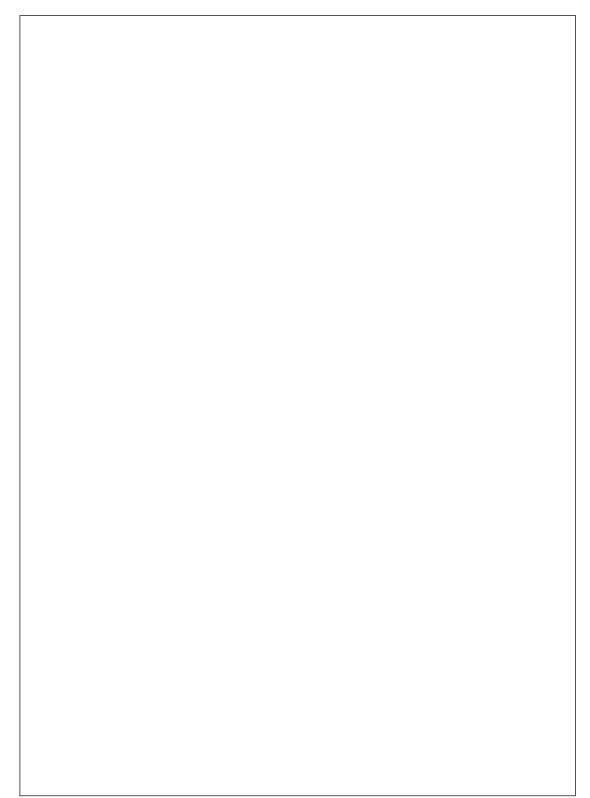

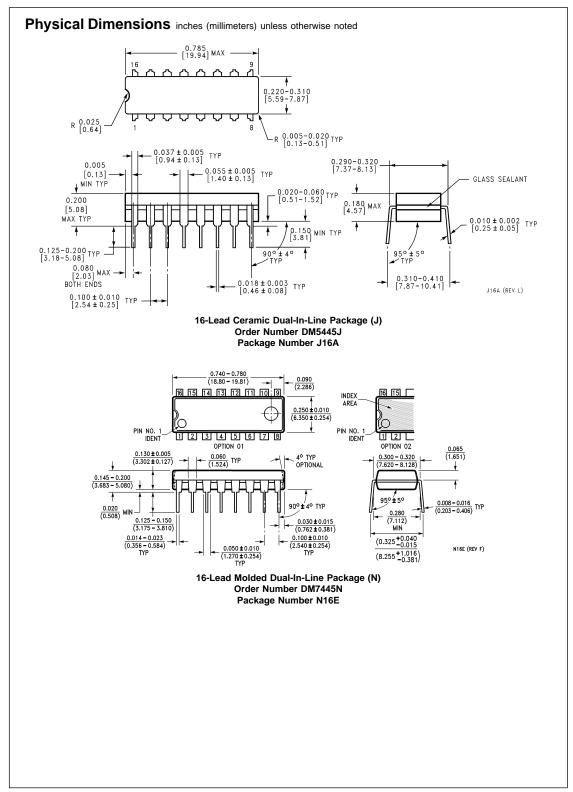

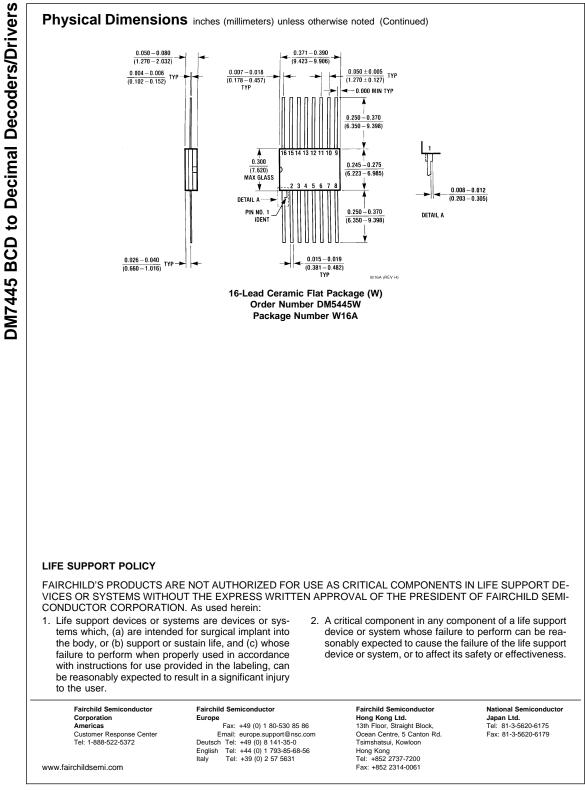

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications