


High Power Infrared Emitting Diode, 950 nm, GaAlAs/GaAs

Description

TSAL5300 is a high efficiency infrared emitting diode in GaAs technology, molded in clear, bluegrey tinted plastic packages.



Features

- · Extra high radiant power and radiant intensity
- · Low forward voltage
- Suitable for high pulse current operation
- Standard T-1¾ (Ø 5 mm) package
- Angle of half intensity $\varphi = \pm 22^{\circ}$
- Peak wavelength $\lambda_p = 940 \text{ nm}$
- · High reliability
- Good spectral matching to Si photodetectors
- · Lead (Pb)-free component
- Component in accordance to ELV 2000/53/EC, RoHS 2002/95/EC and WEEE 2002/96/EC



Applications

Infrared remote control units with high power requirements



Free air transmission systems

Infrared source for optical counters and card readers IR source for smoke detectors

Parts Table

Part	Ordering Code	Remarks
TSAL 5300	TSAL5300	MOQ 4000 pc (Bulk)
TSAL 5300	TSAL5300-FSZ	MOQ 5000 pc (1000 pc / Ammopack)
TSAL 5300	TSAL5300-GSZ	MOQ 5000 pc (1000 pc / Ammopack)

Absolute Maximum Ratings

 T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Reverse Voltage		V _R	5	V
Forward current		I _F	100	mA
Peak Forward Current	$t_p/T = 0.5, t_p = 100 \mu s$	I _{FM}	200	mA
Surge Forward Current	t _p = 100 μs	I _{FSM}	1.5	Α
Power Dissipation		P _V	210	mW
Junction Temperature		T _j	100	°C
Operating Temperature Range		T _{amb}	- 55 to + 100	°C
Storage Temperature Range		T _{stg}	- 55 to + 100	°C
Soldering Temperature	$t \le 5$ sec, 2 mm from case	T _{sd}	260	°C
Thermal Resistance Junction/ Ambient		R _{thJA}	350	K/W

Document Number 81008 www.vishay.com

Rev. 1.7, 08-Mar-05



Electrical Characteristics

 T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Min	Тур.	Max	Unit
Forward Voltage	$I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	V _F		1.35	1.6	V
	I _F = 1 A, t _p = 100 μs	V _F		2.6	3	V
Temp. Coefficient of V _F	I _F = 100 mA	TK _{VF}		- 1.875		mV/K
Reverse Current	V _R = 5 V	I _R			10	μΑ
Junction capacitance	V _R = 0, f = 1 MHz, E = 0	C _j		25		pF

Optical Characteristics

 T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Min	Тур.	Max	Unit
Radiant Intensity	$I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	I _e	30	45	150	mW/sr
	$I_F = 1 \text{ A}, t_p = 100 \ \mu \text{s}$	I _e	260	350		mW/sr
Radiant Power	$I_F = 100 \text{ mA}, t_p = 20 \text{ ms}$	φ _e		35		mW
Temp. Coefficient of φ _e	I _F = 20 mA	TKφ _e		- 0.6		%/K
Angle of Half Intensity		φ		± 22		deg
Peak Wavelength	I _F = 100 mA	λ_{p}		940		nm
Spectral Bandwidth	I _F = 100 mA	Δλ		50		nm
Temp. Coefficient of λ_p	I _F = 100 mA	TKλ _p		0.2		nm/K
Rise Time	I _F = 100 mA	t _r		800		ns
	I _F = 1 A	t _r		500		ns
Fall Time	I _F = 100 mA	t _f		800		ns
	I _F = 1 A	t _f		500		ns
Virtual Source Diameter	method: 63 % encircled energy	Ø		2.3		mm

Typical Characteristics (Tamb = 25 °C unless otherwise specified)




Figure 1. Power Dissipation vs. Ambient Temperature




Figure 2. Forward Current vs. Ambient Temperature






Figure 3. Pulse Forward Current vs. Pulse Duration




Figure 4. Forward Current vs. Forward Voltage




Figure 5. Relative Forward Voltage vs. Ambient Temperature




Figure 6. Radiant Intensity vs. Forward Current




Figure 7. Radiant Power vs. Forward Current




Figure 8. Rel. Radiant Intensity/Power vs. Ambient Temperature






Figure 9. Relative Radiant Power vs. Wavelength






Figure 10. Relative Radiant Intensity vs. Angular Displacement

Package Dimensions in mm

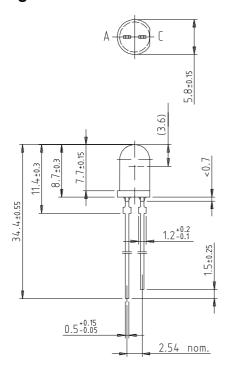



www.vishay.com

Document Number 81008

Rev. 1.7, 08-Mar-05



Tape Dimesions TSAL 5300

Option	H ± 0.5 mm	Quantity/Box
CS21Z	22	1000
FSZ	27	1000
GSZ	29	1000
MSZ	25.5	1000

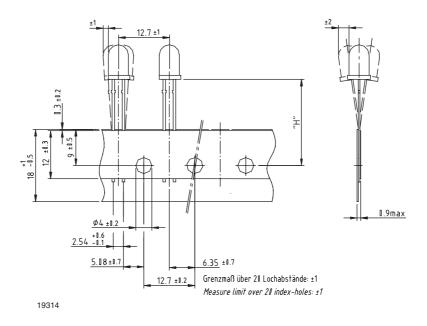


Figure 11. \varnothing 5 mm devices on tape

TSAL5300

Vishay Semiconductors

VISHAY

Ammopack

The tape is folded in a concertina arrangement and laid in cardboard box.

If components are required with cathode before the anode (Figure 12), then start of tape should be taken from the side of the box marked "—"If components are required with anode before cathode, then tape should be taken from the side of the box marked "+".

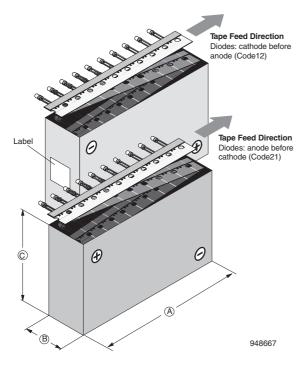


Figure 12. Tape direction

www.vishay.com

Document Number 81008

Rev. 1.7, 08-Mar-05



Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

- 1. Meet all present and future national and international statutory requirements.
- 2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

- 1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
- 2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
- 3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

> We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany

Document Number 81008 www.vishay.com Rev. 1.7, 08-Mar-05

Legal Disclaimer Notice



Vishay

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

Document Number: 91000 www.vishay.com