
LedEngin, Inc.

High Luminous Efficacy RGBA LED Emitter

LZ4-00MA10



Key Features

- High Luminous Efficacy 10W RGBA LED
- Individually addressable Red, Green, Blue and Amber die
- White point tunable to any CCT or hue with enhanced CRI
- Ultra-small foot print 7.0mm x 7.0mm x 4.3mm
- Surface mount ceramic package with integrated glass lens
- Very low Thermal Resistance (2.7°C/W)
- Very high Luminous Flux density
- New industry standard for Lumen Maintenance (>90% at 100,000 Hours)
- JEDEC Level 2 for Moisture Sensitivity Level
- Autoclave compliant (JEDEC JESD22-A102-C)
- Lead (Pb) free and RoHS compliant
- Reflow solderable (up to 6 cycles)
- Emitter available on <u>Standard MCPCB</u> (optional)

Typical Applications

- Architectural Lighting
- Retail Spot and Display Lighting
- Stage and Studio Lighting
- Hospitality Lighting
- Museum Lighting
- Dental and Medical Illumination
- Microscope Illumination
- Video Walls and Full Color Displays

Description

The LZ4-00MA10 RGBA LED emitter contains one red, green, blue and amber LED die which provides 10W power in an extremely small package. With a 7.0mm x 7.0mm x 4.3mm ultra-small footprint, this package provides exceptional luminous flux density. LedEngin's RGBA LED offers ultimate design flexibility with individually addressable die. The LZ4-00MA10 is capable of producing any white color temperature with CRI values on the order of 90+ and millions of colors. The patent-pending design has unparalleled thermal and optical performance. The high quality materials used in the package are chosen to optimize light output and minimize stresses which results in monumental reliability and lumen maintenance. The robust product design thrives in outdoor applications with high ambient temperatures and high humidity.

Table of Contents

Product Nomenclature	3
IPC/JEDEC Moisture Sensitivity	3
Average Lumen Maintenance Projections	3
Luminous Flux Binning	4
Dominant Wavelength Binning	4
Forward Voltage Binning	4
Absolute Maximum Ratings	5
Optical Characteristics	5
Electrical Characteristics	5
Mechanical Dimensions	6
Pin-Out	6
Recommended Solder Pad Layout	6
Reflow Soldering Profile	7
Typical Radiation Pattern	8
Typical Relative Spectral Power Distribution	8
Typical Dominant Wavelength Shift	9
Typical Dominant Wavelength Shift over Temperature	9
Typical Relative Light Output	10
Typical Relative Light Output over Temperature	10
Typical Forward Current Characteristics	11
Current Derating Curves	11
Emitter Tape & Reel Specifications	12
Company Information	13

Product Nomenclature

The LZ Series base part number designation is defined as follows:

LZA-BCDEFG

Where:

A – designates the number of LED die in the package ("4" for 10W)

B – designates the package level ("0" for Emitter)

C – designates the radiation pattern ("0" for Lambertian)

D and E – designate the color ("MA" for "RGBA" Mixed Dice)

F and G – designate the Power ("10" for 10W typical rating)

Ordering information:

For ordering LedEngin products, please reference the base part number above. The base part number represents any of the flux or dominant wavelength bins specified in the binning tables below. For ordering products with special bin selections, please contact a LedEngin sales representative or authorized distributor.

IPC/JEDEC Moisture Sensitivity Level

Table 1 - IPC/JEDEC J-STD-20 MSL Classification:

			Soak Requirements								
	Floo	or Life	Stan	ndard	Accel	erated					
Level	Time	Conditions	Time (hrs)	Conditions	Time (hrs)	Conditions					
2	1 Year	≤ 30°C/ 60% RH	168 +5/-0	85°C/ 60% RH	n/a	n/a					

Notes for Table 1:

Average Lumen Maintenance Projections

Lumen maintenance generally describes the ability of a lamp to retain its output over time. The useful lifetime for solid state lighting devices (Power LEDs) is also defined as Lumen Maintenance, with the percentage of the original light output remaining at a defined time period.

Based on long-term WHTOL testing, LedEngin projects that the LZ Series will deliver, on average, 90% Lumen Maintenance at 100,000 hours of operation at a forward current of 700 mA. This projection is based on constant current operation with junction temperature maintained at or below 125°C.

The standard soak time is the sum of the default value of 24 hours for the semiconductor manufacturer's exposure time (MET) between bake and bag and the floor life of maximum time allowed out of the bag at the end user of distributor's facility.

Luminous Flux Bins

Table 2:

Bin Code	Minimum Luminous Flux (Φ _V) @ $I_F = 700$ mA ^[1,2] (Im)			Luminous Flux (Φ_V) @ $I_F = 700 \text{mA}^{[1,2]}$ Luminous Flux (Φ_V) @ $I_F = 700 \text{mA}^{[1,2]}$						Typical Luminous Flux (Φ _V) @ I _F = 1000mA ^[1,2] (Im)			
	Red	Green	Blue	Amber	Red	Green	Blue	Amber	Red	Green	Blue	Amber	
J	60				75				85				
K	75				93				105				
L		93				117				135			
М		117				146				160			
E			24				31				35		
F			31				38				45		
Н				48				60				70	
J				60				75				85	
K				75				93				105	

Notes for Table 2:

- Luminous flux performance guaranteed within published operating conditions. LedEngin maintains a tolerance of ±10% on flux measurements.
- Future products will have even higher levels of radiant flux performance. Contact LedEngin Sales for updated information.

Dominant Wavelength Bins

Table 3:

Bin Code	Do	Minimum Dominant Wavelength (λ _D) @ I _F = 700mA ^[1,2] (nm)				Maximum Dominant Wavelength $(λ_D)$ @ $I_F = 700$ mA $^{[1,2]}$ (nm)				
	Red	Green [2]	Blue	Amber	Red	Green [2]	Blue	Ambe		
R2	620				630					
G1		515				520				
G2		520				525				
B4			455				460			
B5			460				465			
B6			465				470			
A8				585				590		
A9				590				595		

Notes for Table 3:

- 1. LedEngin maintains a tolerance of ± 0.5nm on dominant wavelength measurements.
- 2. Green LEDs are binned for dominant wavelength @ I_F = 350mA. Refer to Figure 6 for typical dominant wavelength shift over forward current.

Forward Voltage Bin

Table 4:

		Minir	num		Maximum					
Bin	F	Forward Volume I _F = 7	• •	/ _F)	Forward Voltage (V _F) @ I _F = 700mA ^[1]					
Code		(V)				(V)				
	Red	Green	Blue	Amber	Red	Green	Blue	Amber		
0	2.24	3.20	3.20	2.24	3.20	4.40	4.16	3.44		

Notes for Table 4:

1. LedEngin maintains a tolerance of \pm 0.04V on forward voltage measurements.

Absolute Maximum Ratings

Table 5:

Parameter	Symbol	Value	Unit			
DC Forward Current ^[1]	I _F	1000	mA			
Peak Pulsed Forward Current ^[2]	I _{FP}	1500	mA			
Reverse Voltage	V_R	See Note 3	V			
Storage Temperature	T_{stg}	-40 ~ +150	°C			
Junction Temperature	T_J	150	°C			
Soldering Temperature ^[4]	T_{sol}	260	°C			
Allowable Reflow Cycles	6					
Autoclave Conditions [5]	121°C at 2 ATM, 100% RH for 168 hours					
ESD Sensitivity ^[6]	> 8,000 V HBM Class 3B JESD22-A114-D					

Notes for Table 5:

- Maximum DC forward current is determined by the overall thermal resistance and ambient temperature.
 Follow the curves in Figure 11 for current derating.
- Pulse forward current conditions: Pulse Width ≤ 10msec and Duty Cycle ≤ 10%.
- 3. LEDs are not designed to be reverse biased.
- 4. Solder conditions per JEDEC 020D. See Reflow Soldering Profile Figure 3.
- Autoclave Conditions per JEDEC JESD22-A102-C.
- LedEngin recommends taking reasonable precautions towards possible ESD damages and handling the LZ4-00MA10 in an electrostatic protected area (EPA). An EPA may be adequately protected by ESD controls as outlined in ANSI/ESD S6.1.

Optical Characteristics $@T_C = 25^{\circ}C$

Table 6:

Daramatar	Cumbal		Unit			
Parameter	Symbol	Red	Green	Blue ^[1]	Amber	Onit
Luminous Flux (@ $I_F = 700$ mA)	Фу	85	115	30	60	lm
Luminous Flux (@ I _F = 1000mA)	Фу	115	140	40	75	lm
Dominant Wavelength ^[2,3,4]	λ_{D}	625	520	460	590	nm
Viewing Angle ^[5] 2Θ			9	5		Degrees
Total Included Angle [6]	Θ _{0.9}		Degrees			

Notes for Table 6:


- 1. When operating the Blue LED, observe IEC 60825-1 class 2 rating. Do not stare into the beam.
- 2. Red, Blue and Amber dominant wavelength @ I_F = 700mA. Green dominant wavelength @ I_F = 350mA.
- 3. Refer to Figure 6 for typical dominant wavelength shift over forward current.
- 4. Refer to Figure 7 for typical dominant wavelength shift over temperature.
- Viewing Angle is the off axis angle from emitter centerline where the luminous intensity is ½ of the peak value.
- 6. Total Included Angle is the total angle that includes 90% of the total luminous flux.

Electrical Characteristics @T_C = 25°C

Table 7:

Parameter	Symbol		Unit			
Farameter	Syllibol	Red	Green	Blue	Amber	Onit
Forward Voltage (@ I _F = 700mA)	V_{F}	2.4	3.6	3.5	2.5	V
Forward Voltage (@ I _F = 1000mA)	V_{F}	2.6	3.8	3.7	2.7	V
Temperature Coefficient of Forward Voltage	$\Delta V_F/\Delta T_J$	-1.9	-2.9	-3.0	-2.8	mV/°C
Thermal Resistance (Junction to Case)	$R\Theta_{J-C}$	2.7		°C/W		

Mechanical Dimensions (mm)

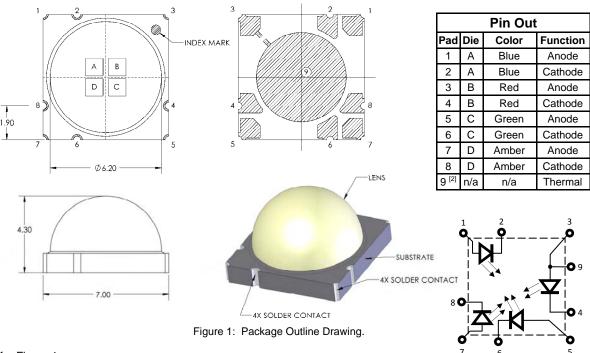

Notes for Figure 1:

- 1. Unless otherwise noted, the tolerance = \pm 0.20 mm.
- 2. Thermal contact, Pad 9, is electrically connected to Pad 3. Do not connect any pad to the thermal contact, Pad 9. When mounting the LZ4-00MA10 onto a MCPCB, by default its dielectric layer provides for the necessary electrical insulation in between all contact pads. LedEngin offers a <u>LZ4-20MA10</u> MCPCB option which provides for electrical insulation between all contact pads. Please refer to Application Note MCPCB Option 2, or contact a LedEngin sales representative for more information.

Recommended Solder Pad Layout (mm)

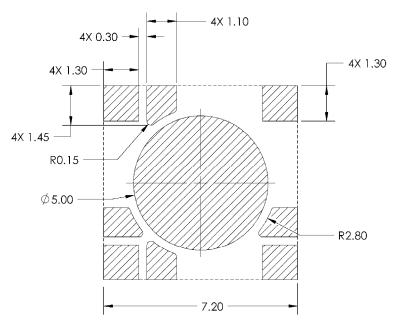


Figure 2: Recommended solder mask opening (hatched area) for anode, cathode, and thermal pad.

Note for Figure 2:

1. Unless otherwise noted, the tolerance = \pm 0.20 mm.

Reflow Soldering Profile

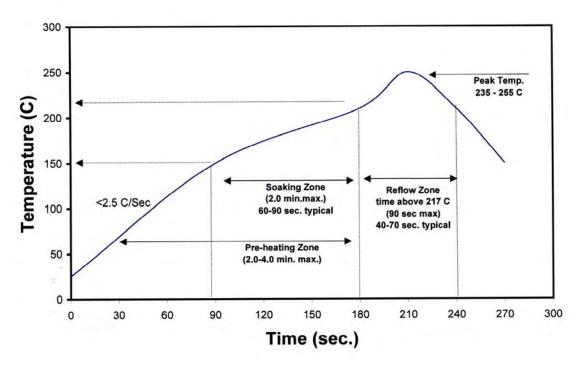


Figure 3: Reflow soldering profile for lead free soldering.

Typical Radiation Pattern

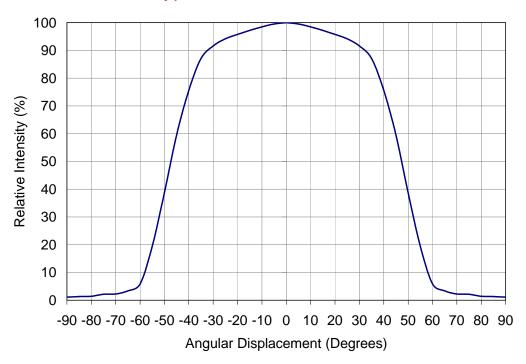


Figure 4: Typical representative spatial radiation pattern.

Typical Relative Spectral Power Distribution

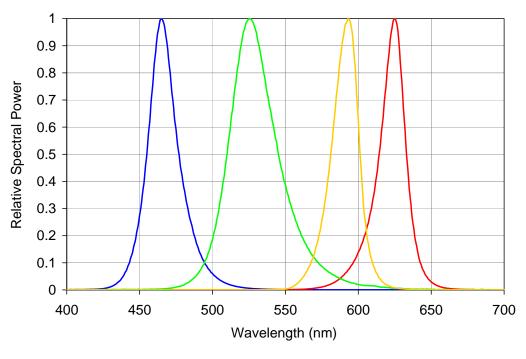


Figure 5: Typical relative spectral power vs. wavelength @ T_C = 25°C.

Typical Dominant Wavelength Shift

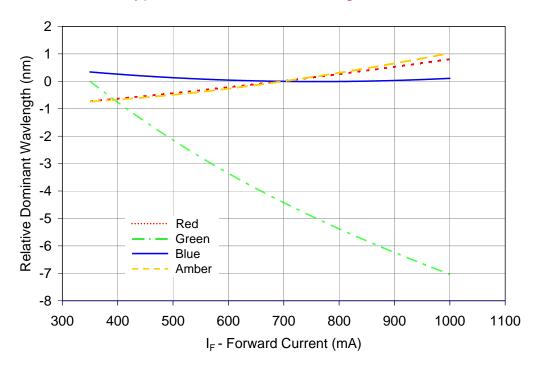


Figure 6: Typical dominant wavelength shift vs. forward current @ $T_C = 25$ °C.

Notes for Figure 6:

- 1. Red, Blue and Amber dominant wavelength relative to $I_F = 700$ mA.
- 2. Green dominant wavelength relative to $I_F = 350 \text{mA}$.

Dominant Wavelength Shift over Temperature

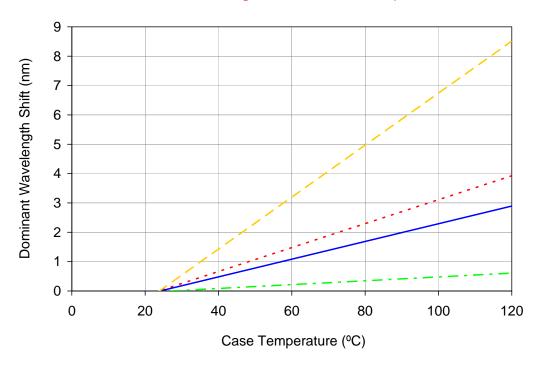


Figure 7: Typical dominant wavelength shift vs. case temperature.

Typical Relative Light Output

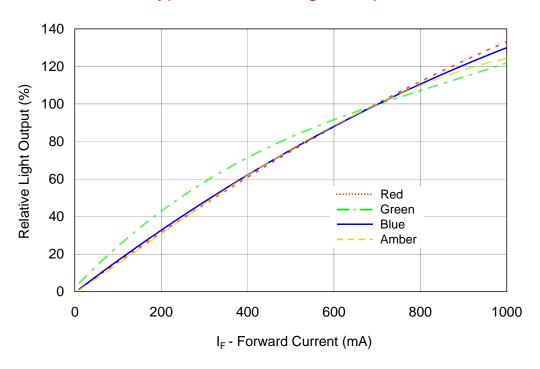


Figure 8: Typical relative light output vs. forward current @ $T_C = 25$ °C.

Typical Relative Light Output over Temperature

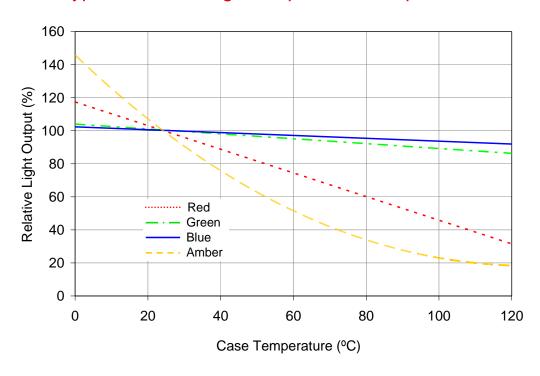


Figure 9: Typical relative light output vs. case temperature.

Typical Forward Current Characteristics

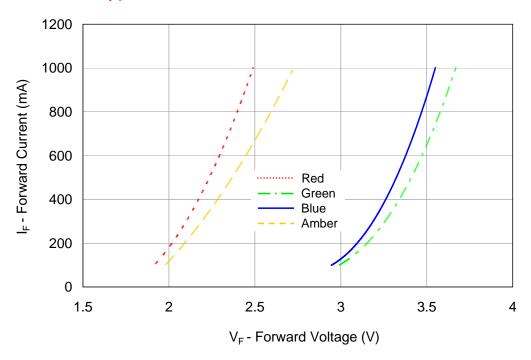


Figure 10: Typical forward current vs. forward voltage @ $T_C = 25$ °C.

Current Derating

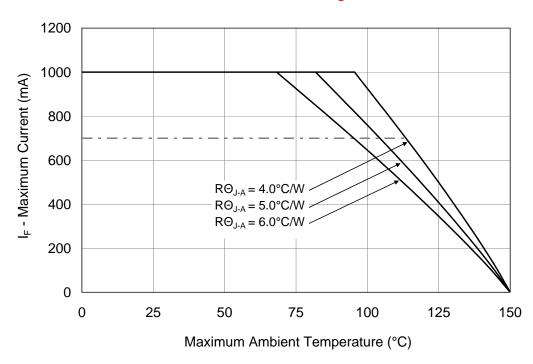
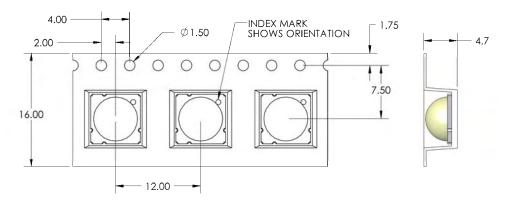


Figure 11: Maximum forward current vs. ambient temperature based on $T_{J(MAX)} = 150$ °C.

Notes for Figure 11:

- 3. Maximum current assumes that all four LED dice are operating concurrently at the same current.
- 4. RΘ_{J-C} [Junction to Case Thermal Resistance] for the LZ4-00MA10 is typically 2.7°C/W.
- 5. $R\Theta_{J-A}$ [Junction to Ambient Thermal Resistance] = $R\Theta_{J-C}$ + $R\Theta_{C-A}$ [Case to Ambient Thermal Resistance].

Emitter Tape and Reel Specifications (mm)



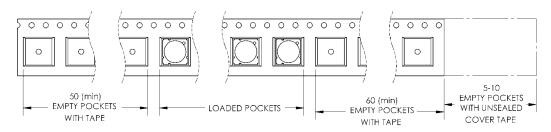


Figure 12: Emitter carrier tape specifications (mm).

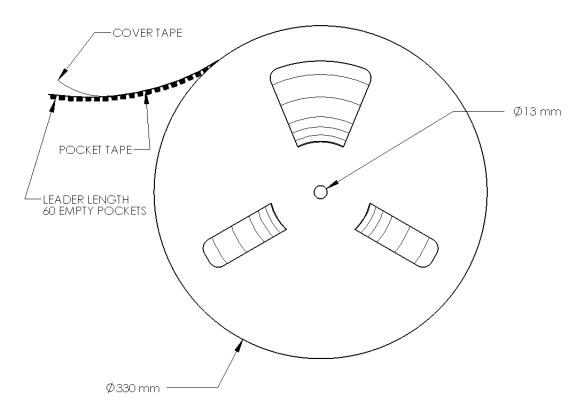


Figure 13: Emitter reel specifications (mm).

Company Information

The LZ4-00MA10 LED emitter is developed, manufactured and marketed by LedEngin, Inc., located in Santa Clara, CA. LedEngin is a global market leader in advanced high-power LED emitters and light-source modules. LedEngin provides total solutions from 3W to 15W in single packages with ultra-small footprints in all colors from Cool White, Neutral White, Warm White, Red, Green, Blue, Amber, RGB, RGBA, Deep Red, Dental Blue, and UV. LedEngin supports customers to generate solid-state lighting designs that conserve natural resources. LedEngin is focused on differentiated Ultra High-Brightness LED solutions for diverse global markets using its patent-pending package designs and manufacturing processes. LedEngin offers catalog as well as full custom solutions to enable flexible system designs for its customers. LedEngin is dedicated to long-term win-win partnering with its customers and suppliers.

LedEngin reserves the right to make changes to improve performance without notice.

Please contact <u>Sales@ledengin.com</u> or (408) 492-0620 for more information.