


Type: **ZB150-35**

Article No.: **278461**

Sales text **Overload relay 25-35**

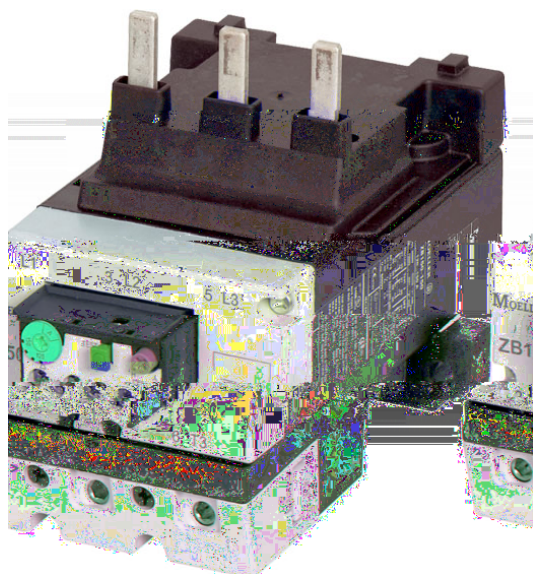


Phase failure sensitivity to IEC/EN 60947, VDE 0660 Part 102

For direct mounting

Ordering information

Description			Direct fitting
Overload releases	I_r	A	25...35
Auxiliary contacts			
N/O = Normally open			1 N/O
N/C = Normally closed			1 N/C
For use with			DILM80, DILM95, DILM115, DILM150, DILM170 DIULM80, DIULM95, DIULM115, DIULM150, SDAINLM140, SDAINLM165, SDAINLM200, SDAINLM260
Short-circuit protection			
Type "1" coordination	gG/gL	A	125
Type "2" coordination	gG/gL	A	100

Contact sequence



Note concerning the product

Overload release: tripping class 10 A

Short-circuit protection: Observe the maximum permissible fuse of the contactor with direct device mounting.

Suitable for protection of EEx e-motors.



PTB 04 ATEX 3022

Observe manual AWB2300–1545D/GB.

General

Standards			IEC/EN 60947, VDE 0660, UL, CSA
Climatic proofing			Damp heat, constant, to IEC 60068–2–78; Damp heat, cyclic, to IEC 60068–2–30
Ambient temperature			
Open		° C	–25...55
Enclosed		° C	–25...40
Temperature compensation			Continuous
Mounting position			Engineering selection data
Weights		kg	1.64
Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068–2–27		g	10
Protection type			IP00
Protection against direct contact when actuated from front (IEC 536)			Finger- and back-of-hand proof

Main conducting paths


Rated impulse withstand voltage	U_{imp}	V AC	8000
Overvoltage category/pollution degree			III/3
Rated insulation voltage			

AC	U_i	V AC	1000
Rated operational voltage	U_e	V AC	1000
Safe isolation to VDE 0106 Part 101 and Part 101/A1			
Between auxiliary contacts and main contacts		V AC	440
Between main circuits		V AC	440
Overload release setting range		A	25...150
Temperature compensation residual error > 40°C		%/K	0.25
Short-circuit protection Maximum fuse			<u>278462</u>
Current heat loss (3 conductors)			
Lower value of the setting range		W	16
Maximum setting		W	18
Terminal capacities			
Solid		mm ²	2 × (4 – 16)
Flexible with ferrule		mm ²	1 × (4 – 70) 2 × (4 – 50)
Stranded		mm ²	1 × (16...50) 2 × (16...50)
Solid or stranded		AWG	2/0
Terminal screw			M10
Tightening torque		Nm	10
Tools			
Hexagon socket-head spanner	SW	mm	5
Auxiliary and control circuits			
Rated impulse withstand voltage	U_{imp}	V	6000
Overvoltage category/pollution degree			III/3
Terminal capacities			
Solid		mm ²	2 × (0.75 – 2.5)
Flexible with ferrule		mm ²	2 × (0.5...2.5)
Solid or stranded		AWG	2 × (18 – 12)
Terminal screw			M3.5
Tightening torque		Nm	0.8 – 1.2
Tools			
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	1 × 6
Rated insulation voltage	U_i	V AC	500
Rated operational voltage	U_e	V AC	500

Safe isolation to VDE 0106 Part 101 and Part 101/A1			
between the auxiliary contacts		V AC	240
Conventional thermal current	I_{th}	A	6
Rated operational current			
AC-15			
Make contact			
120 V	I_e	A	1,5
240 V	I_e	A	1,5
415 V	I_e	A	0,5
500 V	I_e	A	0,5
Break contact			
120 V	I_e	A	1,5
240 V	I_e	A	1,5
415 V	I_e	A	0,9
500 V	I_e	A	0,8
DC-13 L/R – 15 ms			
24 V	I_e	A	0,9
60 V	I_e	A	0,75
110 V	I_e	A	0,4
220 V	I_e	A	0,2
Short-circuit rating without welding			
max. fuse		A gG/gL	6

Notes

Notes			<p>Ambient temperature: Operating range to IEC/EN 60947, PTB: –5° C to +55° C Rated operational current: Making and breaking conditions to DC-13, L/R constant as stated Main contacts terminal capacity solid and stranded conductors with ferrules: When using 2 conductors use identical cross-section See overlay “Fuses” for short-circuit rating time/current characteristic (please enquire) 6 mm flexible with ferrules to DIN 46228 Rated operational current DC-13, 60 V: N/O auxiliary</p>
--------------	--	--	---

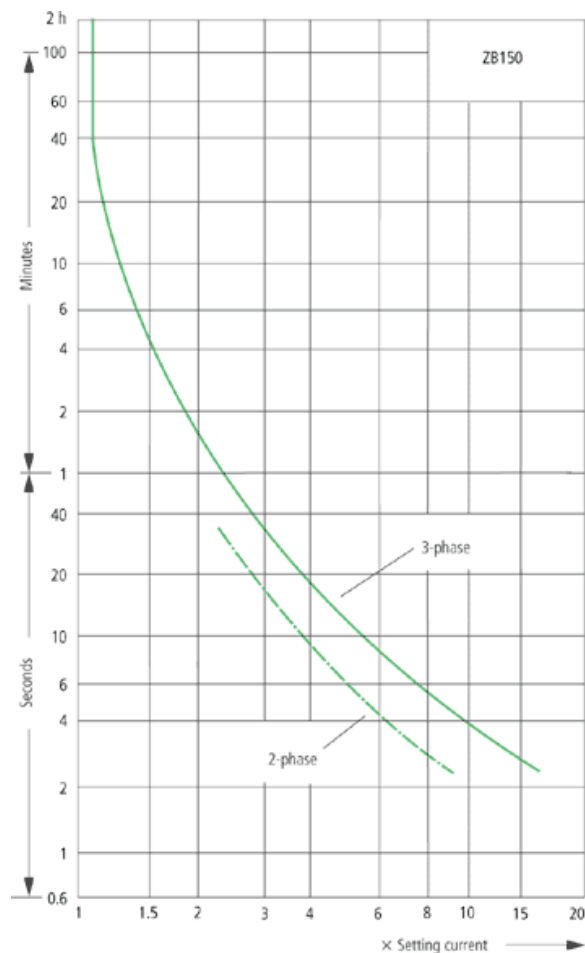

These tripping characteristics are mean values of the spread at 20 ° C ambient temperature in a cold state. Tripping time depends on response current.
 On devices at operating temperature the tripping time of the overload relay drops to approx. 25 % of the read value. Specific characteristics for each individual setting range can be found in the manual.

Moeller GmbH, Hein-Moeller-Str. 7-11, D-53115 Bonn
 E-Mail: catalog@moeller.net, Internet: www.moeller.net, <http://catalog.moeller.net>
 Copyright 2006 by Moeller GmbH. HPL-C2007G V2.1