

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- , - .



COPYRIGHT

-

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC


DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	ECR-09-004273	02-03-09	AEG	KMA
	M1	ECR-09-011073	01JUN10	RK	KMA
	M2	ECR-10-020025	13JAN11	RK	KMA

NOTES:

- 1 THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
 - 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
 - 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
 - 4 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONTACTS
91067-3 INSERTION/REMOVAL
726363-1 INSERTION ONLY
24-20AWG CONTACTS
726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY
- 5 INSERTS: GLASSFILLED SELF-EXTINGUISHING PBT, COLOR BLACK.
- 6 TE, PARTNUMBER AND DATE CODE; INK STAMPED.
- 7 RAISED CAVITY IDENTIFICATION 0,8 HIGH.
- 8 RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164534-9.

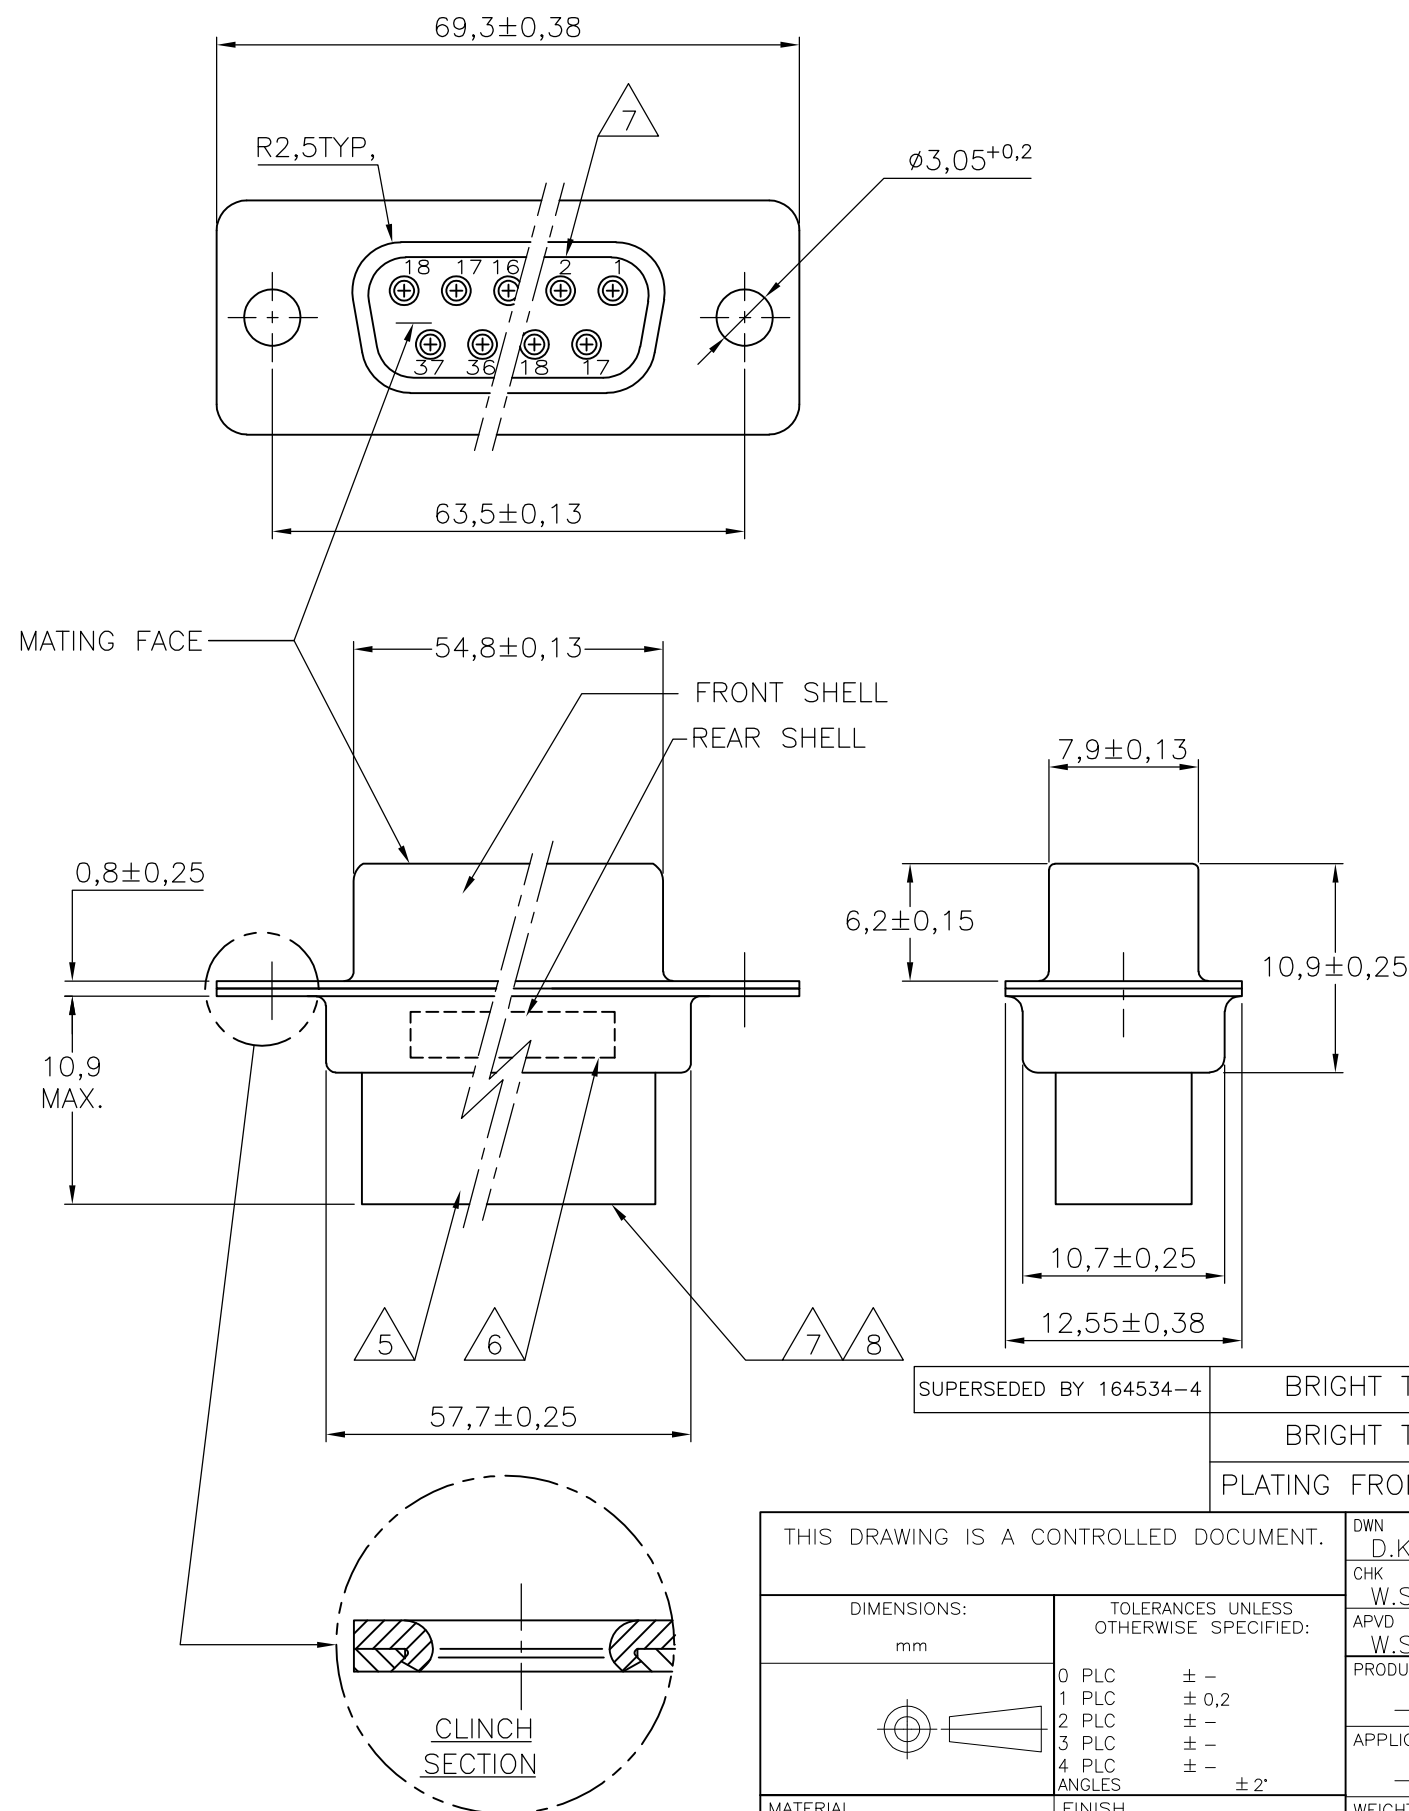

SUPERSEDED BY 164534-4

BRIGHT TIN

BRIGHT TIN

STEEL

164534-9



BRIGHT TIN

BRIGHT TIN

STEEL

164534-4

PLATING FRONT SHELL

PLATING REAR SHELL

MATERIAL SHELLS

PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.KESSLER

11FEB99

CHK
W.SOOMERSAPVD
W.SOOMERS

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

Tyco Electronics Corporation
's-Hertogenbosch, Nederland

NAME

37 POS HDP-20 RECEPTACLE
CONNECTOR SIZE 4

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

-

C- 164534

-

SCALE
NTSSHEET
1 OF 1REV
M2