



M-7151 7

ALL SCREWS ARE
COMBINATION ROBERTSON/
PHILLIPS/SLOTTED HEAD




MOLDED IN RATING
HOT STAMPED WITH
IEC COLOR CODED
BY VOLTAGE

AGENCY LISTING
PER TABLE

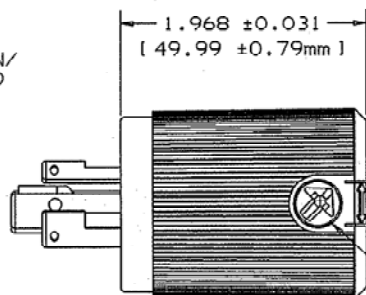

INTEGRAL VARISIZE®
INSERT

CORD CLAMP RANGE
LARGER THAN GAUGE
CORD: 18/3 TYPE S
16/3 - 10/3
TYPES: S, SO, SJ
DIAMETER .325-.720 INCH
(8.3-18.3mm)

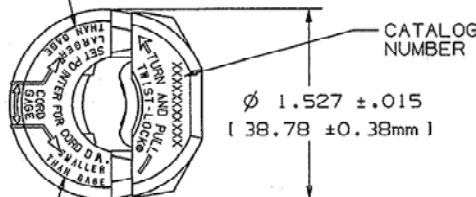

CATALOG
NUMBER

Ø 1.527 ±.015
[38.78 ±0.38mm]

CORD CLAMP RANGE
SMALLER THAN GAUGE
CORD: 18/3-16/3
TYPES: SV, SJ
DIAMETER: .230-.360 INCH
(5.8-9.1mm)

CHEM-MARINE CAT. NO. (YELLOW COVER) & INSERT [B]	CAT. NO. (YELLOW COVER) & INSERT	CAT. NO. (BLACK COVER) & INSERT	ALL BLACK [C]	CONFIGURATION	RATING	IEC RATING COLOR	U.L.	C.S.A.
HBL47CM20C	_____	HBL4720C	HBL4720CBK	NEMA 5-15P	15A. 125V.	YELLOW	YES	YES
HBL45CM70C	_____	HBL4570C		NEMA 6-15P	15A. 250V.	BLUE	YES	YES
HBL47CM70C	_____	HBL4770C		NEMA 7-15P	15A. 277VAC	GRAY	YES	YES
_____	HBL7567CY	HBL7567C		3 POLE 3 WIRE	15A. 125V. 10A. 250V.	BLACK	NO	NO

- [A] WHITE FINISH ON NEUTRAL CONTACT WHEN USED.
- [B] CM DEVICES SAME AS ABOVE EXCEPT:
COVER & CORD CLAMP - YELLOW
TERMINAL SCREWS & CONTACT - NICKEL PLATED
WIRE CLAMPS - BRASS, NICKEL PLATE
ASSEM FASTENERS - STAINLESS STEEL
- [C] BK DEVICES ARE SAME AS ABOVE EXCEPT
ALL BLACK

LEGEND: INCHES
[mm]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BLADE HOLDER	NYLON	NATURAL
RETAINER	POLYCARBONATE	CLEAR
COVER	NYLON	
INSERT	NYLON	
CORD CLAMP	NYLON	NATURAL
WIRE CLAMP	.062 CRS	NICKEL PL
CONTACT BLADES	.060 BRASS	
BINDING SCREWS	BRASS	
GROUND HEX HEAD BINDING SCREW	BRASS	GREEN
CORD CLAMP	STEEL	ZINC PL
ASSY SCREWS	STEEL	ZINC PL

7	REVISED TEXT HEIGHT FOR XXX AND TURN AND PULL TO .07. REVISED TEXT HEIGHT FOR TWIST LOCK TO .08. PICTORIAL UPDATE ONLY. PER DCN 17514 SPN	DJP	3/31/11
6	ADDED "ALL BLACK" COLUMN TO TABLE; ADDED NOTE C PER DCN 11843 RCM	CAC	4/5/04
5	IN LIST OF PARTS, "POLYCARBON- ATE WAS "LEXAN"; PER DCN #8898. JAN	CJC	2/18/02
4	REMOVED "X" FROM CAT NO'S CHGD SCREWS TO TRI-DRIVE PER DCN #7772. AMZ	DB	8/17/00
3	"HBL" REMOVED FROM CATALOG #S IN CHEM-MARINE COLUMN IN TABLE PER DCN #3175 RCM	JZ	1/24/95
2	TABLE UPDATED: "ALL SCREWS..." ADDED: AGENCY LISTED... ADDED PER DCN #2940 RCM	JEZ	8/1/94
1	"X" REMOVED PER DCN #1008 RCM	VFL	8/30/93
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE INSULGRIP®
2 POLE 3 WIRE
GROUNDING TWIST-LOCK®
PLUGS

TOLERANCES UNLESS
OTHERWISE SPECIFIED

FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY RCM APP. BY VFL
TR. BY SCALE $\frac{1}{2}$
CHK'D BY ZIMM DATE 6/30/93