
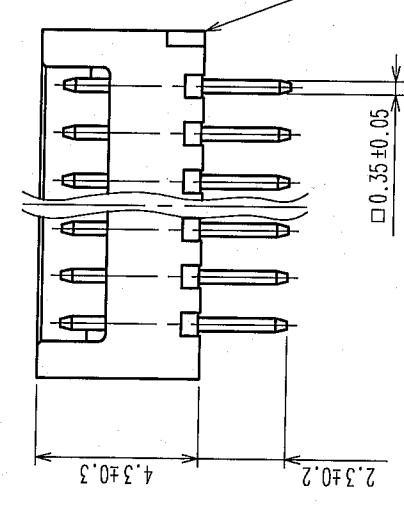
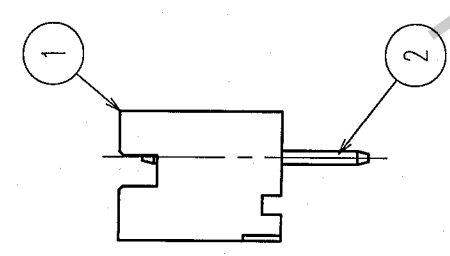


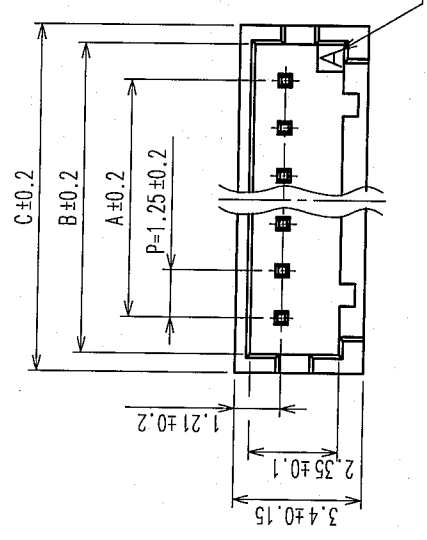


POLARIZATION MARKING


1

2

2 APPLICATION FIGURE

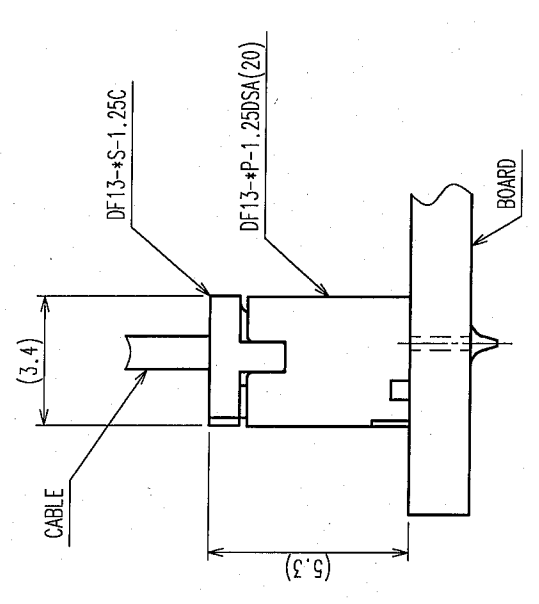

3 RECOMMENDED PATTERN

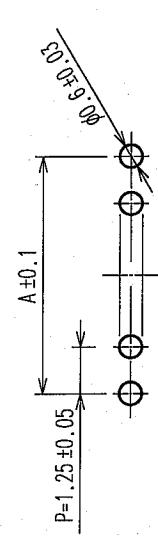

PART No.	CODE No.	NUMBER OF CONTACTS	A	B	C
DF13- 2P-1.25DSA(20)	CL536-0101-9-20	2	1.25	3.15	4.15
DF13- 3P-1.25DSA(20)	CL536-0102-1-20	3	2.5	4.4	5.4
DF13- 4P-1.25DSA(20)	CL536-0103-4-20	4	3.75	5.65	6.65
DF13- 5P-1.25DSA(20)	CL536-0104-7-20	5	5	6.9	7.9
DF13- 6P-1.25DSA(20)	CL536-0105-0-20	6	6.25	8.15	9.15
DF13- 7P-1.25DSA(20)	CL536-0106-2-20	7	7.5	9.4	10.4
DF13- 8P-1.25DSA(20)	CL536-0107-5-20	8	8.75	10.65	11.65
DF13- 9P-1.25DSA(20)	CL536-0108-8-20	9	10	11.9	12.9
DF13-10P-1.25DSA(20)	CL536-0109-0-20	10	11.25	13.15	14.15
DF13-11P-1.25DSA(20)	CL536-0110-0-20	11	12.5	14.4	15.4
DF13-12P-1.25DSA(20)	CL536-0111-2-20	12	13.75	15.65	16.65
DF13-13P-1.25DSA(20)	CL536-0112-5-20	13	15	16.9	17.9
DF13-14P-1.25DSA(20)	CL536-0113-8-20	14	16.25	18.15	19.15
DF13-15P-1.25DSA(20)	CL536-0114-0-20	15	17.5	19.4	20.4

2	BRASS	SURFACE: TIN PLATED 1μm min.	4	STYRENIC-BASED ELASTOMERS	STOPPER, GREEN
1	POLYAMIDE	BEIGE(NATURAL), UL94V-0	3	PS	ELECTROSTATIC PROTECTION, CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)					
DRAWN			DESIGNED	CHECKED	APPROVED
T. Kumagawa			T. Kumagawa	T. Kumagawa	T. Ono
05.11.16			05.11.16	05.11.16	05.11.16
RELEASED			RELEASED		
DRAWING NO.			PART NO.		
EDC3-083673-05			DF13--P-1.25DSA(20)		
SCALE			CODE NO.		
5 : 1			CL536-		
UNITS			1/2		
mm			FORM NO. 229		
HIROSE ELECTRIC CO., LTD			8		

- 1 WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK OF CONNECTOR SHALL BE SET AT THE CENTER OF HOUSING. IN CASE THAT THE NUMBER OF CONTACTS IS MORE THAN FOUR, THE TWO LOCKS SHALL BE SET IN ACCORDANCE WITH THE DRAWINGS.
- 2 WHEN THIS CONNECTOR MATES WITH DF13-S-1.25C, THE MATING LENGTH IS 5.3mm.
- 3 RECOMMENDED DIP POST DIA. : φ 0.6±0.03

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△						△				
	△						△				
	△						△				

DE 13511-2 (D.S.A.)

MADE IN JAPAN
HS
ヒコセ電機


駐于ユーロ圏への回収に御協力ください

1 2 3 4 5 6 7 8



PART No.	CODE No.	NUMBER OF CONTACTS	QUANTITY OF CONNECTORS
DF13- 2P-1, 25DSA(20)	CL536-0101-9-20	2	115
DF13- 3P-1, 25DSA(20)	CL536-0102-1-20	3	89
DF13- 4P-1, 25DSA(20)	CL536-0103-4-20	4	72
DF13- 5P-1, 25DSA(20)	CL536-0104-7-20	5	61
DF13- 6P-1, 25DSA(20)	CL536-0105-0-20	6	52
DF13- 7P-1, 25DSA(20)	CL536-0106-2-20	7	46
DF13- 8P-1, 25DSA(20)	CL536-0107-5-20	8	41
DF13- 9P-1, 25DSA(20)	CL536-0108-8-20	9	37
DF13-10P-1, 25DSA(20)	CL536-0109-0-20	10	34
DF13-11P-1, 25DSA(20)	CL536-0110-0-20	11	31
DF13-12P-1, 25DSA(20)	CL536-0111-2-20	12	29
DF13-13P-1, 25DSA(20)	CL536-0112-5-20	13	27
DF13-14P-1, 25DSA(20)	CL536-0113-8-20	14	25
DF13-15P-1, 25DSA(20)	CL536-0114-0-20	15	23

NOTE 4. MINIMUM UNIT OF PURCHASE SHALL BE THE QUANTITY OF CONNECTORS IN TUBE.

	DRAWING NO.		PART NO.		FINISH, REMARKS		FINISH, REMARKS	
	EDC3-083673-05		DF13-*P-1.25DSA(20)					
SCALE					DRAWN		DESIGNED	
FREE					7. Kumazawa T. Kumazawa		H. Umemura	
UNITS					'05.11.16		'05.11.16	
			HIROSE ELECTRIC CO., LTD			CL536-		
			CODE NO.			2		