





This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing




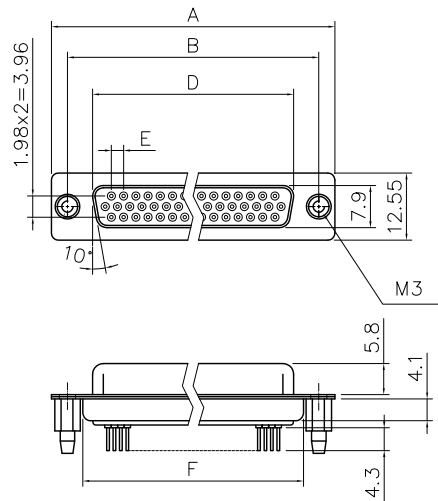


P.C.B LAYOUT PATTERN
Tolerance:±/-0.05



Dimensions

Positions	A	B	D	E	F	G	H
15	30.81	24.99	16.33	2.29	19.20	1.145	7.04
26	39.20	33.30	24.70	2.29	27.70	1.145	6.88
44	53.05	47.04	38.40	2.29	41.10	1.145	6.88
62	69.40	63.50	54.80	2.41	57.30	1.205	7.00

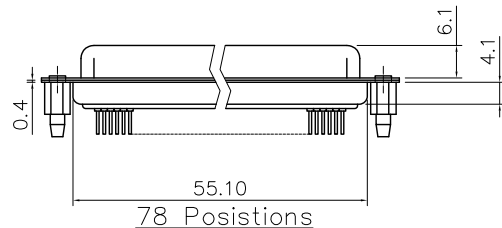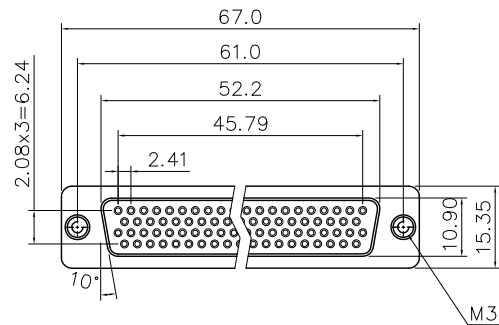

PRODUCT CODE

L 177 HD X XX S OL2 RM23

L: RoHS Compliance

177:tinned shell
for receptable

Shell Size:E,A,B,C,D

RM23=3.0 B/L
+M3

Termination:
Straight for PCB

Contact type:
S=Socket

Configuration:
15,26,44,62,78

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	FILED	12/27/13
.X +/-	0.50	CHECKED	Tony Tang	12/27/13
.XX +/-	0.30	CHECKED		
.XXX +/-	0.20			
FRACTIONS +/-	5°			
ANGLES +/-				
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol

Amphenol East Asia Limited

TITLE
D-SUB connector,HD serie

SIZE	DRAWING NO.	REV.
A4	C L177HDXSOL2RM23	1
SCALE	NONE	SHEET 1 OF 1