SYMBOL DEFINITION			MISSING SYMBOL
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL (⬭) DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	7	NO MISSING SYMBOL NUMBER
	LAST NO. USED	5	

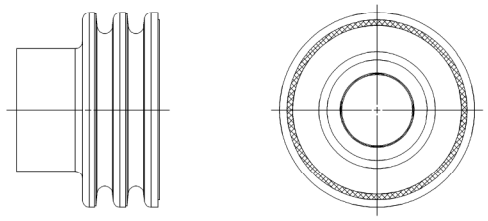

OPTIONAL CONSTRUCTION 1
(ANTI-STICK RING)

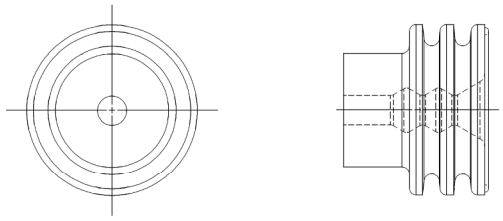

OPTIONAL CONSTRUCTION 2
THIS IS THE PREFERRED CONSTRUCTION FOR NEW TOOL BUILDS
(ANTI-STICK RING)



(2) SEALING RIBS MUST BE FREE OF SINKS, VOIDS, KNIT LINES AND FLASH IN THE AREA SHOWN ALL AROUND PART.

SEE VPS A-121 FOR ADDITIONAL INFORMATION.



TYPE 303
SAME AS TYPE 301 EXCEPT AS SHOWN



DETAIL Y
SCALE 20:1



TYPE 301

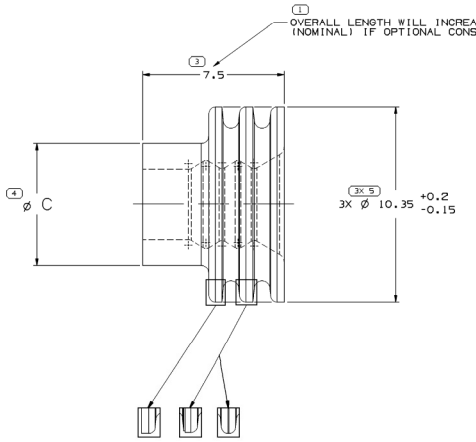

SEALING RIBS MAY DIFFER AS SHOWN

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. PARTS ARE TO BE PACKAGED IN SEALED PLASTIC BAGS. GROSS WEIGHT INCLUDING CARTON IS NOT TO EXCEED 34 POUNDS.
3. TO IMPROVE SEAL TO LEAD PROCESSING ON SLIPPERY OR SMOOTH CABLE INSULATION, THE APPLICATION ENGINEER MAY SPECIFY THE NEXT SMALLER SEAL SIZE P/N IN PLACE OF THE INDICATED SEAL FOR THE "CABLE O.D." LISTED IN THE CHART.

MYLAR & CABLE SEAL ASM PART NO	REV	N/P	STATUS	CABLE SEAL PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION	COLOR (REF ONLY)	ALTERNATE MATERIAL SPECIFICATION	TYPE	CABLE O.D. ±0.05 SEE NOTE #3	C	VOL CM³	EQUIVALENT CABLE SEAL
				15397197	01	AB		M3469002	BLK	M3466002	301	4.5 - 3.61	6	0.305	
10730240	03	AA		15324997	01	AC		M346903B	TAN	M346603B	301	2.15-1.65	6	0.363	12077759
15340032	01	AA		15324996	01	AC		M3469008	BLU	M3466008	301	4.5-3.61	6	0.305	12052668
15344951	01	AA		15324995	01	AC		M3469037	DK RD	M3466037	301	2.85-2.01	6	0.357	12052388
10730241	01	AA		15324994	01	AC		M3469003	GRA	M3466003	301	3.75-2.81	6	0.335	12052387
				15324993	01	AC		M3469007	GRN	M3466007	301	5.15-4.4	6.5	0.293	12052386
12077760	A2	-		12077759	B3	-		M2261029	TAN	-	301	2.15-1.65	6	0.363	15324997
12059260	A2	-		12052668	02	AB		M3471008	BLU	M2261008	301	4.5-3.61	6	0.305	15324996
12059259	A2	-		12052388	A3	-		M2261019	DK RD	-	301	2.85-2.01	6	0.357	15324995
12059258	A2	-		12052387	03	AB		M3471003	GRA	M2261012	301	3.75-2.81	6	0.335	15324994
12059257	A2	-		12052386	A3	-		M2261001	GRN	-	301	5.15-4.4	6.5	0.293	15324993
				12045772	A2	-	OBSOLETE	M2261001	GRN	-	302	4.21-3.5	4.25	0.275	-

DRAWING NUMBER	SIZE	SCALE	FRAME NO	SHEET NO	STG	REV	N/P
12010295	A1x3	10:1	2 OF 2	3 OF	R	08	-

(5) PROCESS SENSITIVE DIM

DIMENSIONS ENCLOSED IN ( ) INDIC
REFERENCE DIMENSIONS AND NO TOLE
LIMITS ARE ESTABLISHED

DIMENSIONAL BASIC UNIT	CUT
FROM	0 > 20 > 30 > 70
TO	20 > 30 > 70 > 120

TOLERANCE UNLESS OTHERWISE SPE
.XX ±0.13 .XXX ±0.03 ANGULAR ±2°
ANGULAR TOLERANCE ±2°