

10		9		8		
ITEM	MOLEX P/N	DESCRIPTION			QTY	UOM
A,B	2064610200	Micro-Fit Plus Rcpt Hsg 2X1			2	PC
C	2064620100	Micro-Fit Plus TPA 2X1			4	PC
D	2064600021	Micro-Fit Plus FemCpTer 20-24AWG Tin Lu			4	PC
PL	-	PART ID LABEL			1	PC

		2		1
FROM	TO	WIRE SIZE	WIRE TYPE	COLOR
A-1	B-1	20 AWG	UL 1061	BLACK
A-2	B-2	20 AWG	UL 1061	BLACK

TABLE 1		
LABEL ID	LABEL CONTENT	REMARK
PL	MOLEX PN MOLEX BATCH WK/YR	LABEL TEXT MUST BE 2MM MAX IN HEIGHT WITH ARIAL FONT AND WRAPPED IN FLAG TYPE ON A SINGLE WIRE.

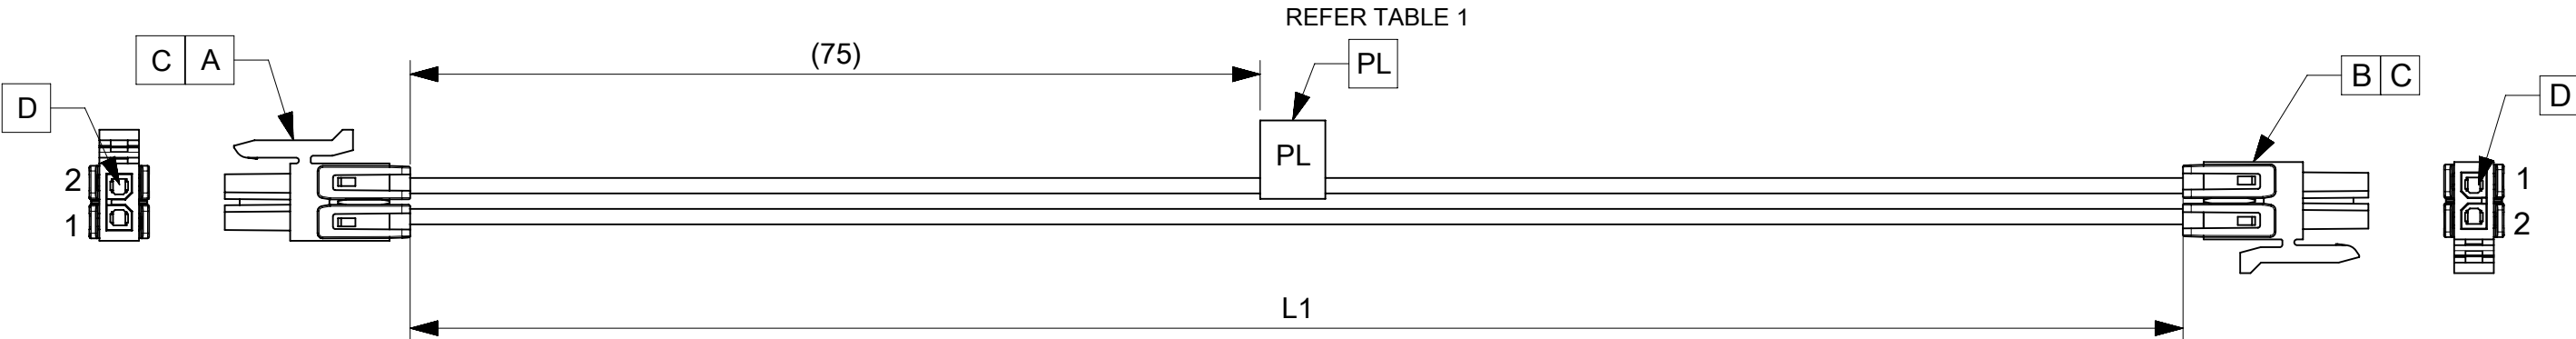


TABLE		
FG PART #	L1	TITLE
2283631022	150±5	Micro-Fit Plus R-R 2ckt 150mmdisc Sn
2283631024	500±5	Micro-Fit Plus R-R 2ckt 500mmdisc Sn

NOTE:

1. CONNECTOR VIEW/CIRCUIT NOS SHOWN FROM THE MATING SIDE OF THE CONNECTOR, CONNECTOR VIEW IS SHOWN ONLY FOR REFERENCE. .
2. THE PRODUCT HAS TO MEET PERFORMANCE SPECIFICATION AS PER ES-36586-004.

TESTING REQUIREMENT		
TEST NAME/COMPONENT NAME	TEST PARAMETER	REQUIREMENT
Continuity/Short/Open	AS PER PIN OUT TABLE	100%

A	INITIAL RELEASE	804816	20/11/2024
REVISION	CHANGE NOTE	EC NO	DATE
REVISION HISTORY			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																	
FUNCTIONAL SYMBOLS FA = 0 FE = 0 FD = 0 DIVISIONAL SYMBOLS		DIMENSION UNITS		SCALE		CURRENT REV DESC: EC NO: 804816 DRWN: ASHLYR12024/10/01 CHK'D: NAVEEB62024/11/20 APPR: RPAI012024/11/21 INITIAL REVISION: DRWN: ASHLYR12024/10/01 APPR: RPAI012024/11/21				2283631022 SEE TABLE							
		mm		NTS													
		GENERAL TOLERANCES (UNLESS SPECIFIED)															
		ANGULAR TOL ± °															
		4 PLACES		±													
		3 PLACES		±													
2 PLACES		±															
1 PLACE		±															
0 PLACES		±															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
								A3-SIZE		228363		SEE TABLE		GENERAL MARKET		1 OF 1	

DOCUMENT STATUS	P1	RELEASE DATE	2024/11/21 05:44:05
-----------------	----	--------------	---------------------