


GSD

M55339/17-00274

REVISIONS

ISSUE	CHANGES
8	CN 35618 D KH 01/09/95
9	CN 38302 E REDRAWN TML 05/10/01

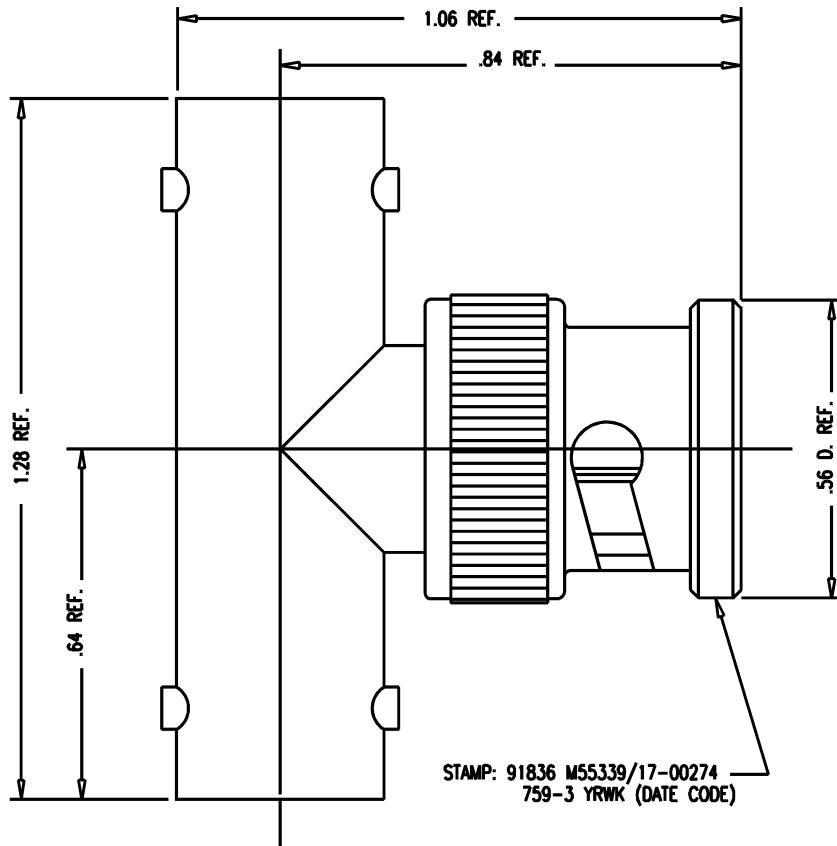

NOTES:

- MATERIALS:
INSULATORS: TEFLON, ASTM-D-1457
GASKET: SIL. RUB., QQ-R-765
OUTER CONTACT: PHOS. BRONZE, QQ-B-750
SPRING WASHER } BER. COP., ASTM-D-196
CONTACT F }
ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
SPRING WASHER } SILVER PLATE PER QQ-S-365
CAM LEVER }
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz

759-3S

SCALE 4:1

APPROX SURFACE AREA

759-3

USED ON

REF:

ADPT, F-M-F, TEE, BNC

DRAWN	JHP	DATE	07/23/76
DESIGN		DATE	
APPR.	J.M.	DATE	08/20/76

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

M55339/17-00274

GSD