
Quad Band External Antenna

- **GSM Antenna Quad Band**
- **Weather Proof**
- **External**
- **2 dBi Gain**

ADA-0169 is a Quad band GSM antenna with SMA connector, delivered with 5m RG178 cable.

Suitable for fixed wireless communication devices in remote areas.
Omniradiant performance.




RoHS

Specification

Antenna	Specification
Frequency	800/900/1800/1900 & 2100MHz
Polarization	Vertical
V.S.W.R	<2.0:1
Impedance	50Ω
Return Loss	See Diagram
	Environmental Conditions
Operating Temperature	-40°C ~ + 80°C
Storage Temperature	-40°C ~ + 80°C
Relative Humidity	40% to 95%
	Mechanical Specification
Antenna Color	Black
Cable	RG178, 5m
Connector	SMA (M)
Size	267mm
Weight	245g Max.
Mounting	Bracket with Screws

Return Loss & VSWR

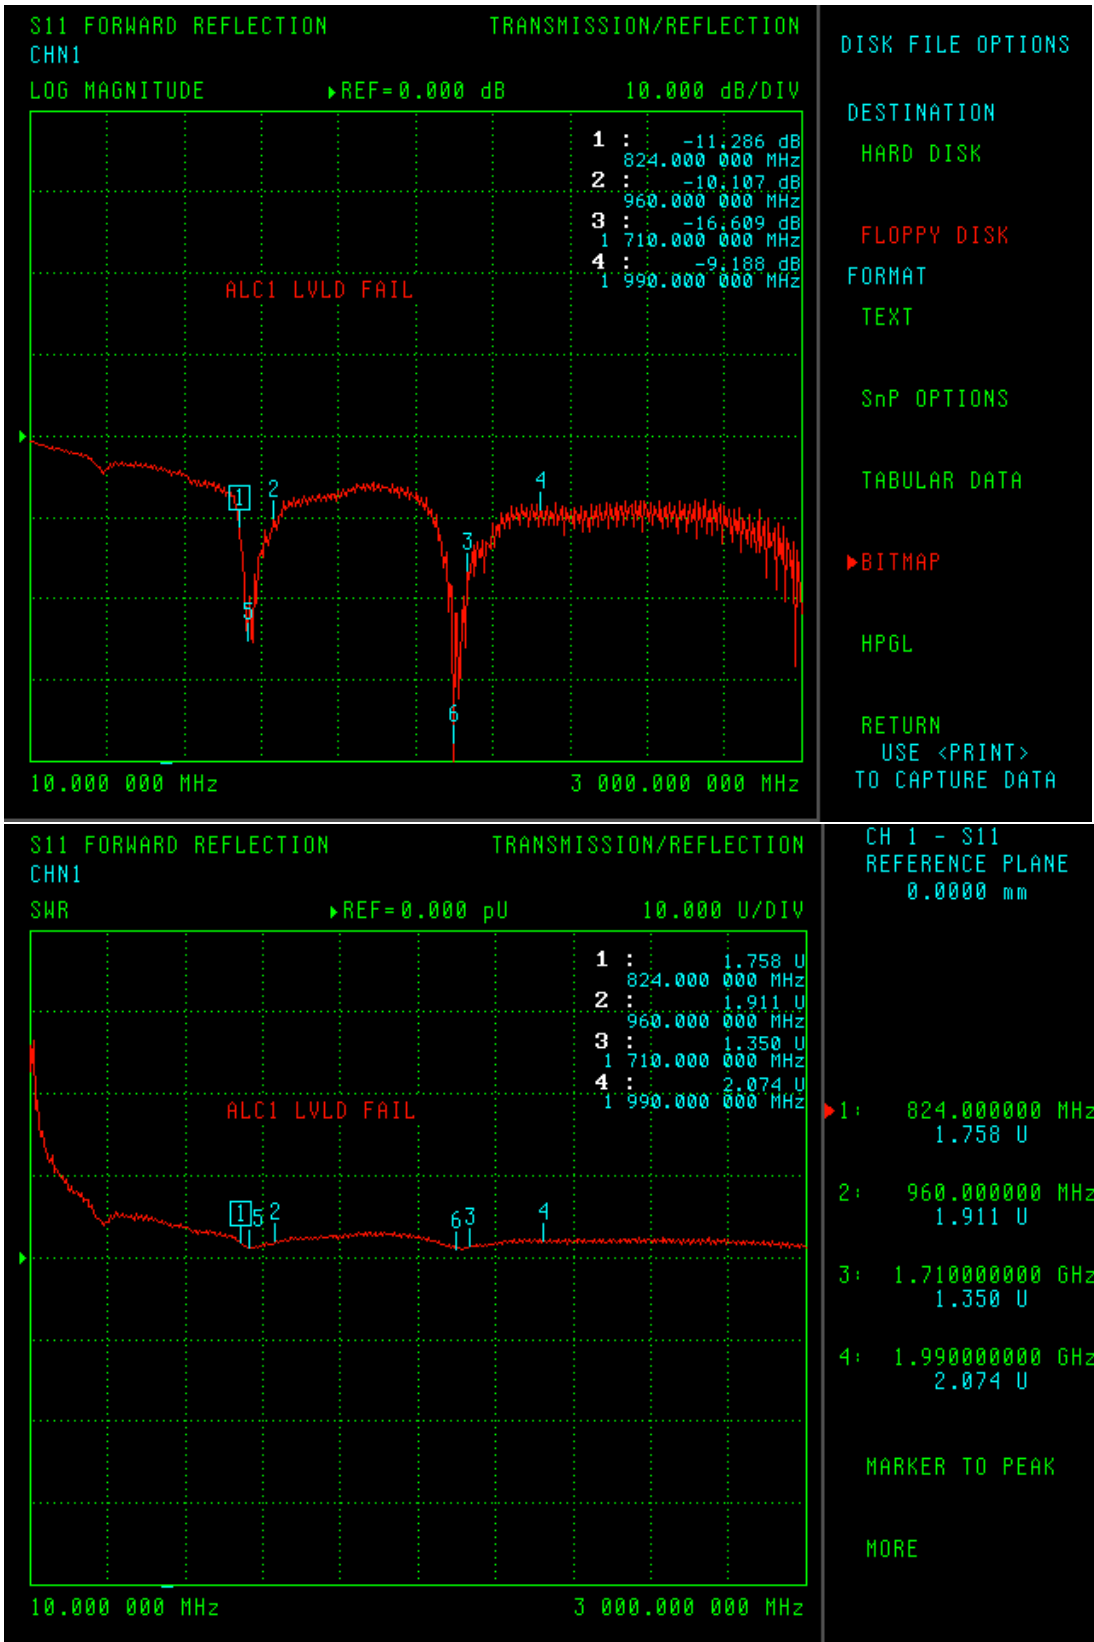

Ordering codes

TYPE	Description	Comment
ADA-0169	External GSM Antenna	Quad Band Antenna

For the latest updates, visit our Web site: www.adactus.se

Disclaimer

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.