




HIGH TEMPERATURE

Shielded Power Inductors – XAL60xx

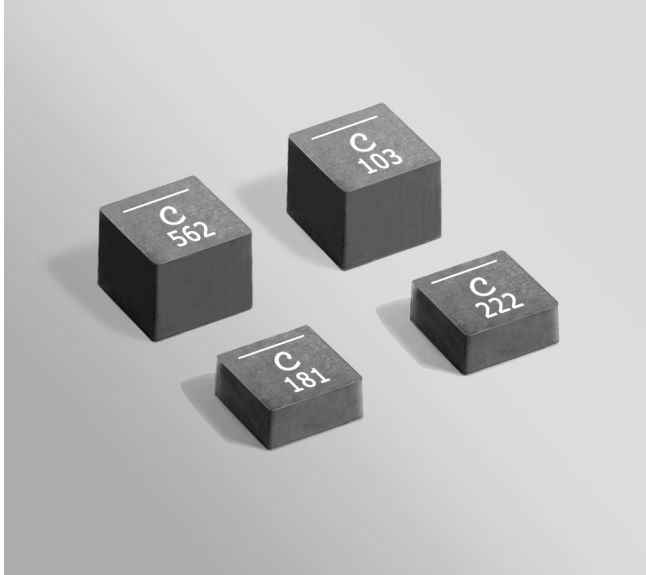

- High current; very low DCR; soft saturation
- AEC-200 Grade 1 qualified (–40°C to +125°C ambient)

Designer's Kit C442 contains 3 each of all values.

Core material Composite

Environmental RoHS compliant, halogen free

Terminations RoHS compliant tin-silver (96.5/3.5) over copper. Other terminations available at additional cost.

Ambient temperature –40°C to +125°C with Irms current, +125°C to +165°C with derated current.

Storage temperature Component: –40°C to +165°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging

XAL6030 400/7" reel; 1500/13" reel Plastic tape: 16 mm wide, 0.3 mm thick, 12 mm pocket spacing, 3.12 mm pocket depth

XAL6060 250/7" reel; 750/13" reel Plastic tape: 16 mm wide, 0.3 mm thick, 8 mm pocket spacing, 6.23 mm pocket depth

PCB washing Only pure water or alcohol recommended

| Part number ¹ | Inductance ² ±20% (µH) | DCR (mOhms) ³ | | SRF typ ⁴ (MHz) | Isat ⁵ (A) | Irms (A) ⁶ | |
|--------------------------|--------------------------------------|--------------------------|-------|-------------------------------|--------------------------|-----------------------|-----------|
| | | typ | max | | | 20°C rise | 40°C rise |
| XAL6030-181ME_ | 0.18 | 1.59 | 1.75 | 141 | 39.0 | 24 | 32 |
| XAL6030-331ME_ | 0.33 | 2.30 | 2.53 | 89 | 30.0 | 20 | 25 |
| XAL6030-561ME_ | 0.56 | 3.01 | 3.31 | 61 | 29.0 | 17 | 22 |
| XAL6030-102ME_ | 1.0 | 5.62 | 6.18 | 50 | 23.0 | 13 | 18 |
| XAL6030-122ME_ | 1.2 | 6.82 | 7.50 | 43 | 22.0 | 12 | 16 |
| XAL6030-182ME_ | 1.8 | 9.57 | 10.52 | 34 | 18.2 | 10 | 14 |
| XAL6030-222ME_ | 2.2 | 12.70 | 13.97 | 30 | 15.9 | 7.0 | 10 |
| XAL6030-332ME_ | 3.3 | 19.92 | 20.81 | 26 | 12.2 | 6.0 | 8.0 |
| XAL6060-472ME_ | 4.7 | 13.10 | 14.40 | 21 | 10.5 | 8.0 | 11 |
| XAL6060-562ME_ | 5.6 | 14.46 | 15.90 | 20 | 9.9 | 7.5 | 10 |
| XAL6060-682ME_ | 6.8 | 18.90 | 20.80 | 18 | 9.2 | 7.0 | 9.0 |
| XAL6060-822ME_ | 8.2 | 24.00 | 26.40 | 16 | 8.4 | 6.0 | 8.0 |
| XAL6060-103ME_ | 10 | 27.00 | 29.82 | 14 | 7.6 | 5.0 | 7.0 |
| XAL6060-153ME_ | 15 | 39.77 | 43.75 | 11 | 5.8 | 4.5 | 6.0 |
| XAL6060-223ME_ | 22 | 55.12 | 60.63 | 9 | 5.6 | 3.6 | 5.0 |

Irms Testing

Irms testing was performed on 0.75 inch wide × 0.25 inch thick copper traces in still air.

Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.

1. When ordering, please specify **termination** and **packaging** codes:

XAL6060-223MEC

Termination: E = RoHS compliant tin-silver over copper.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape.

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked.

2. Inductance tested at 100 kHz, 0.1 Vrms, 0 Adc.

3. DCR measured on a micro-ohmmeter.

4. SRF measured using Agilent/HP 4395A or equivalent.

5. DC current at which the inductance drops 30% (typ) from its value without current.

6. Current that causes the specified temperature rise from 25°C ambient.

7. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 887-1 Revised 11/20/12

© Coilcraft Inc. 2012









This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check out web site for latest information.

HIGH TEMPERATURE



Shielded Power Inductors – XAL60XX

L vs Current

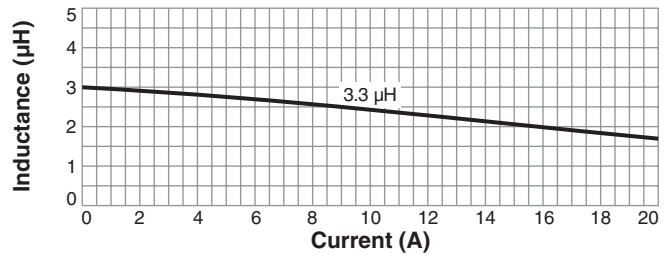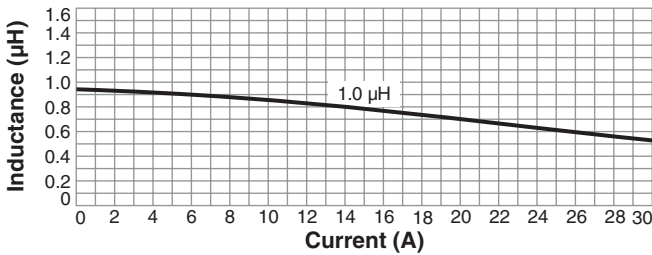
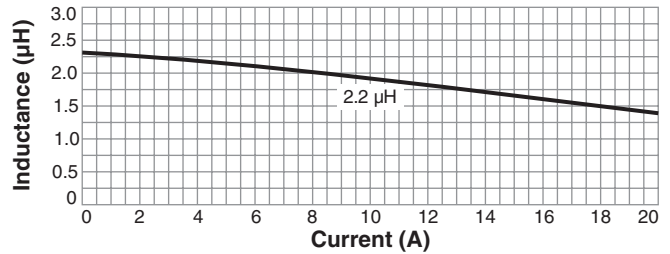
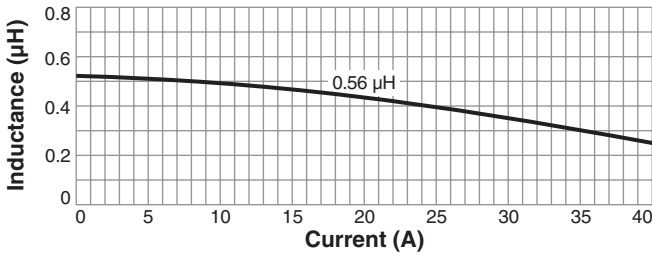
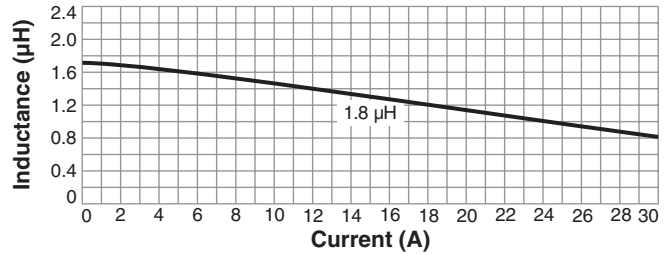
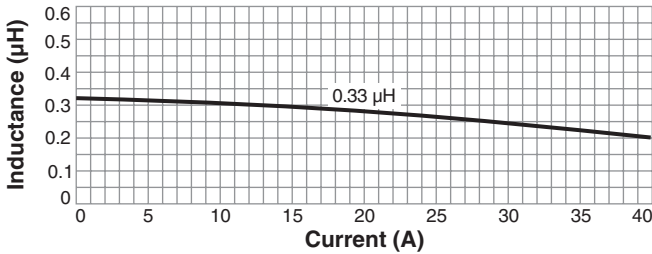
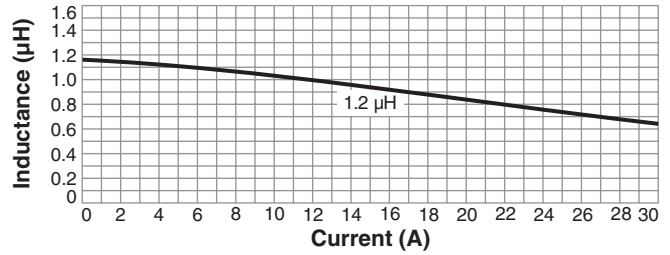
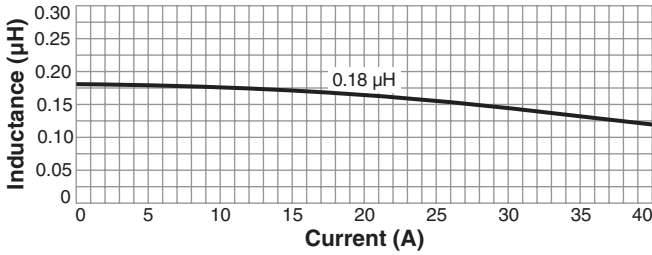


HIGH TEMPERATURE



Shielded Power Inductors – XAL60XX

L vs Current

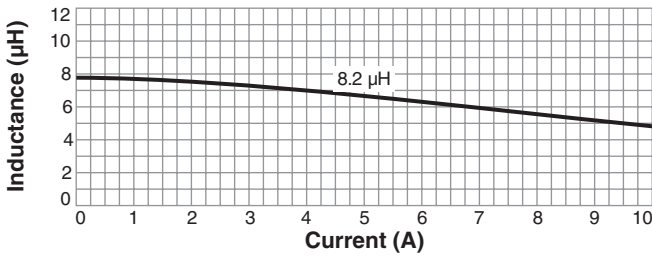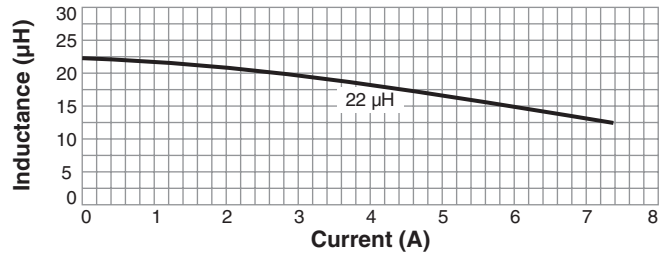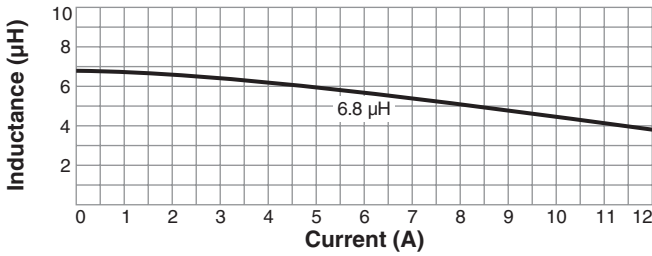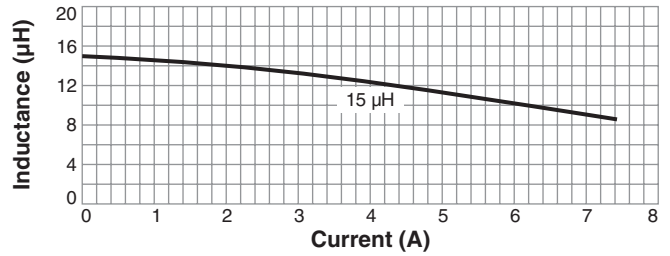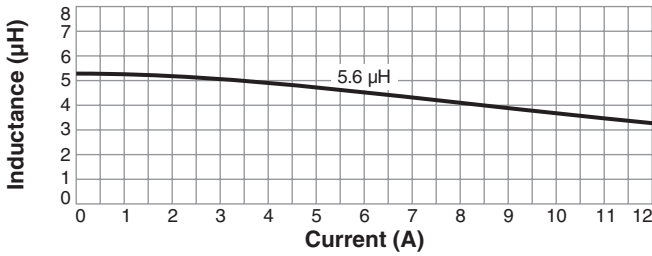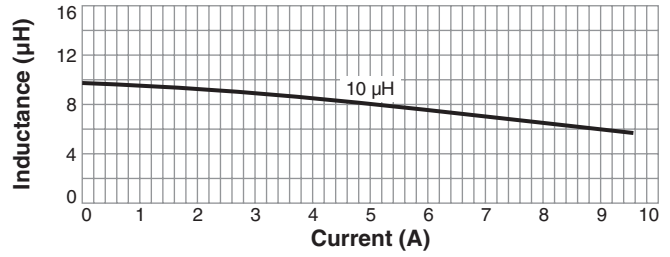
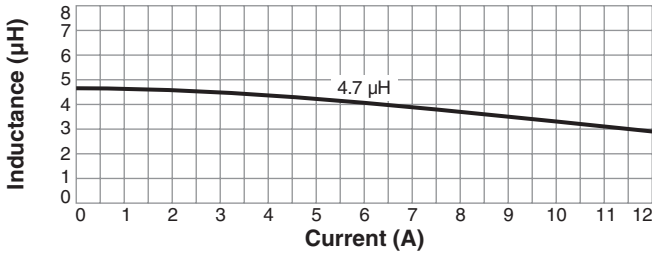


HIGH TEMPERATURE




Shielded Power Inductors – XAL60XX

Typical L vs Frequency

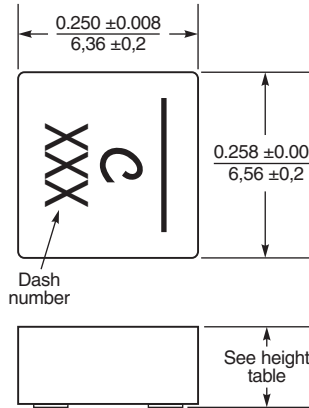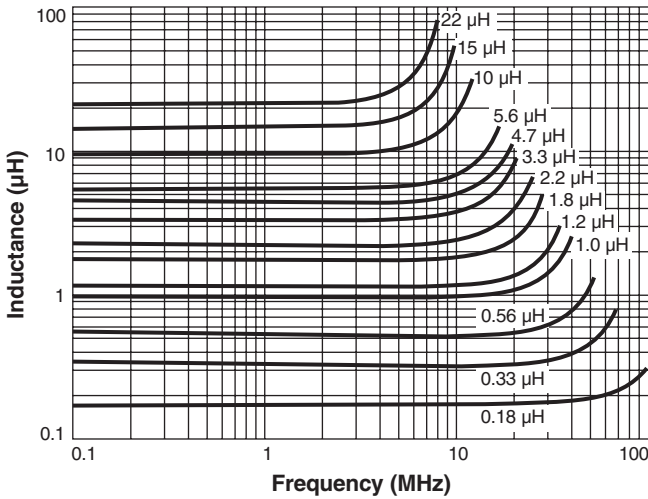

| Dash number | A ±0.008 in ±0.20 mm (in / mm) | B (in / mm) |
|-------------|---|----------------|
| -181 | 0.213 / 5.42 | 0.224 / 5.69 |
| -331 | 0.213 / 5.42 | 0.224 / 5.69 |
| -561 | 0.213 / 5.42 | 0.224 / 5.69 |
| -102 | 0.206 / 5.24 | 0.213 / 5.42 |
| -122 | 0.206 / 5.24 | 0.213 / 5.42 |
| -182 | 0.204 / 5.18 | 0.210 / 5.33 |
| -222 | 0.201 / 5.12 | 0.206 / 5.24 |
| -332 | 0.200 / 5.08 | 0.204 / 5.18 |
| -472 | 0.204 / 5.18 | 0.210 / 5.33 |
| -562 | 0.204 / 5.18 | 0.210 / 5.33 |
| -682 | 0.204 / 5.18 | 0.210 / 5.33 |
| -822 | 0.201 / 5.12 | 0.206 / 5.24 |
| -103 | 0.201 / 5.12 | 0.206 / 5.24 |
| -153 | 0.200 / 5.08 | 0.204 / 5.18 |
| -223 | 0.200 / 5.08 | 0.204 / 5.18 |

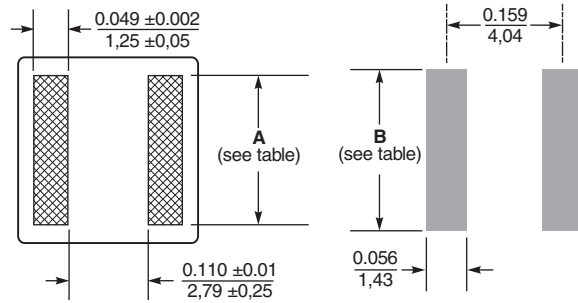

| | Maximum height | Weight |
|---------|----------------|---------------|
| XAL6030 | 0.122 / 3,1 | 0.60 – 0.70 g |
| XAL6060 | 0.240 / 6,1 | 1.2 – 1.3 g |

Recommended Land Pattern

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Irms Derating

