## Microswitch SPDT, Roller





## **Specifications:**

Rating : 5A, 125/250V AC

: 5(2)A, 125/250V AC (NEMKO/ENEC/CQC)

: 40T125 µ5E4

Maximum Contact Resistance :  $500M\Omega$ 

 $\begin{array}{ll} \mbox{Insulation Resistance} & : > 100 \mbox{M}\Omega \; 500 \mbox{V DC} \\ \mbox{Withstand Voltage} & : 1,000 \mbox{V AC for 1 minute} \end{array}$ 

Operating Frequency : Mechanical 60 operations/minute

: Electrical 6 to 12 operation/minute

Ambient Temperature: -25°C to +85°CAmbient Humidity: ≤ 85%RHMechanical Life: 1,000,000 cyclesElectrical Life (at rate load): 50,000 cycles


**Contact Configuration** : SPDT Microswitch Type : Snap Action Switch Operation : Off-On **Switch Terminals** : Solder Contact Resistance : 50mΩ **External Depth** : 6.4mm External Width : 19.8mm Height : 10.6mm : 0.59N Operating Force Pre-travel : 4mm Series : M140T01

Switch Case : PBT (Polybutylene Terephthalate)



## Microswitch SPDT, Roller



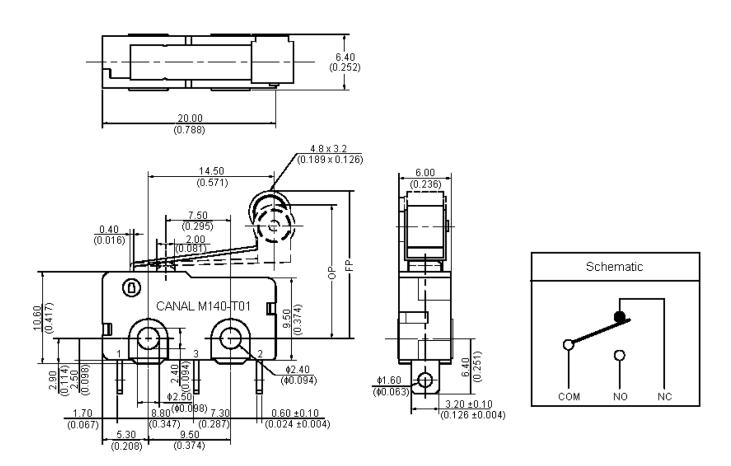

**Note:** Tolerances unless otherwise specified: ±0.016/0.4 inches/mm

Dimensions: Millimetres

## **Part Number Table**

Description	Operating force (gf)					ОР	Max.	Dort number
	Α	В	С	D	E	(mm)	FP (mm)	Part number
Microswitch, SPDT, 5A, Roller	20	30	40	50	55	15.5 ±1.5	18.9	M140T01-AE0505A

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

