

## TLD1020-24-C0700

### Description:

The TLD1020-24-C0700 is a compact and lightweight Constant Current Switch Mode Power Supply. Waterproof design within a 2x4 J box, IP66, NEMA 4 suitable for dry and damp locations. Convection cooled plastic housing. Designed for outdoor and indoor applications. Some typical applications include LED $\phi$ , Lighting, etc.

### Specifications (@25C)

#### Electrical Specifications:

<b>Input Voltage:</b>	100-304Vac <sup>1</sup>
<b>Input Frequency Range:</b>	47-63Hz
<b>Max Input Current:</b>	0.6A @ 115Vac; 0.3A @ 230Vac
<b>Max Inrush Current:</b>	<5A@115Vac, 10A@220Vac
<b>Power Factor:</b>	>0.9 at full load, 115Vac
<b>Output:</b>	.700Adc $\pm$ 5%, 12-24Vdc
<b>Crest Factor (Ipk):</b>	1.5 Max.
<b>Leakage Current:</b>	300 $\mu$ A Typical
<b>Efficiency:</b>	84% Typical at full load
<b>Maximum power:</b>	20W
<b>Current Accuracy:</b>	$\pm$ 1% (when applicable)
<b>Load Regulation:</b>	$\pm$ 3%
<b>Hold up time:</b>	Half cycle minimum at 120 VAC and 80% of rated voltage
<b>Protection:</b>	Over-voltage, Over current and Short circuit protection: Auto-recovery

#### Environmental Specifications:

<b>Operating Temperature:</b>	-30 to 60°C (De-rating: 1%/°C from 60-70°C)
<b>Storage Temperature:</b>	-40 to 85°C
<b>Operating Humidity:</b>	5 to 95% RH (non-Condensing)
<b>Cooling:</b>	Convection cooling
<b>Vibration:</b>	5 to 50Hz
<b>MTBF:</b>	>100,000 Hours at full load and 25°C ambient conditions
<b>EMC:</b>	Compliant to 47CFR, Part 2, Part 15 and Cisp PUB, 22 Class B

#### General Specifications:

<b>Connections:</b>	5in leads - Input: 18 AWG; Output: 18 AWG, Black (-), Grey (+)
<b>Dimensions (WxLxH):</b>	40.0x95.0x25mm
<b>Weight:</b>	120g
<b>Warranty:</b>	3 years @ 40°C, 100% Load

#### Safety Standards:

<b>Standards:</b>	UL (cUL) 1310, UL48 CE
-------------------	---------------------------




**RoHS Compliance:** This power supply meets the requirements 2002/95/EC, know as the RoHS initiative.

Upon printing, this document is considered ~~uncontrolled~~. Please contact Triad Magnetiqswebsite for the most current version.



For Illustration Only

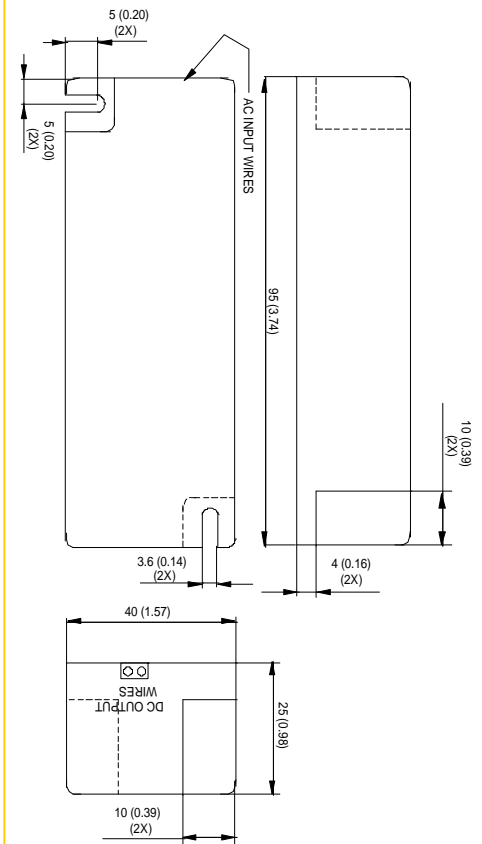

<sup>1</sup> Parts manufactured before November, 2010 have an input voltage range of 90 – 264VAC.