

# Cable Tie

## Heat Stabilized

pro-POWER

RoHS  
Compliant



### Description:

High temperature cable ties are made of specially formulated materials providing various levels of temperature resistance and performance. The cable ties feature inside serrations providing a positive hold onto wire and cable bundles. The head design guarantees high tensile strength, as well as a low insertion force. The bent tail design allows quick and simple installations by hand.

### Features:

- Heat stabilized cable ties provide excellent resistance to high heat exposures.
- Inside serrations allow for strong hold on cables and wire bundles.
- Head design provides high tensile strength with very low insertion force.
- Bent tail ensures a quick and simple installation.

### Specifications:

Material	: Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	: PA66HS
Colour	: Black
Tie Closure	: Plastic pawl
Variant	: Inside serrated
Halogenfree	: Yes
Operating Temperature	: -40°C to +125°C (-40°F to +257°F)

### Product Dimensions

Min. Tensile Strength (imperial)	: 18lbs
Min. Tensile Strength (N)	: 80N
Length	: 83mm (3.27")
Width	: 2.3mm (0.09")
Bundle Diameter (Min.)	: 1.5mm (0.06")
Bundle Diameter (Max.)	: 16mm (0.63")
Packaging	: 1,000 to Bag


[www.element14.com](http://www.element14.com)  
[www.farnell.com](http://www.farnell.com)  
[www.newark.com](http://www.newark.com)  
[www.cpc.co.uk](http://www.cpc.co.uk)

pro-POWER

# Cable Tie Heat Stabilized

pro-POWER

## Dimensions:

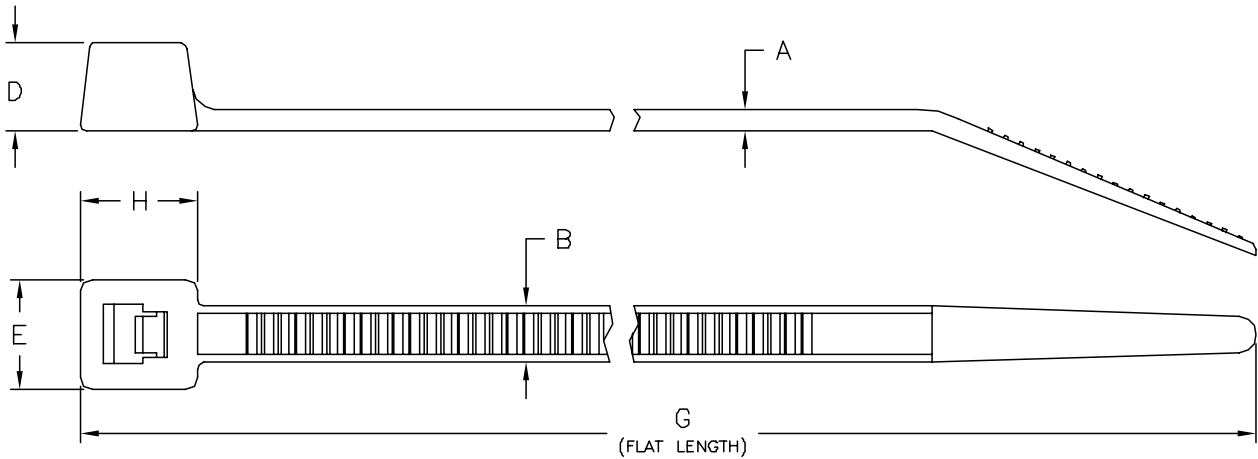

## Part Number Table

Description	A (mm)	B (mm)	D (mm)	E (mm)	G (mm)	H (mm)	Min Loop Tensile Strength (newtons)	Part Number
Cable tie heat stabilized	0.95 ±0.2	2.3 ±0.2	3.2 ±0.3	4.2 ±0.3	83 ±5	4.5 ±0.5	80	8409-0366

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com  
www.farnell.com  
www.newark.com  
www.cpc.co.uk

pro-POWER