# Mallory Sonalert Products, Inc.

Part #: **JT120-R-CSL**

# Sales Outline Drawing

Revision: **A**

## Specifications:

| | | | | | |
|---|---|---|---|---|---|
| Stack Number: | 1 | | | | |
| LED Color: | RED | | | | |
| Connection Wires: | Red and Brown | | | | |
| LED Current Draw: | <30mA | | | | |
| Rated Voltage: | 120 VAC | | | | |
| Operating Voltage: | 90-120 VAC | | | | |
| Sound Level Category: | Loud | Loud | Loud | Loud | |
| Mode of Operation: | Continuous | Medium Pulse (5PPS) | Double Pulse (0.5PPS) | Continuous for 5 sec then 0.1s beep until reset | |
| Connection: | Black and Gray Wires | Black and Gray Wires; Orange wire connected to Green/Yellow wire | Black and Gray Wires; Purple wire connected to Green/Yellow wire | Black and Gray wires; Orange and Purple wires connected to Green/Yellow wire | |
| Sound Current Draw: | 40mA Max. | | | | |
| Loudness @ 1m: | 80-85 dB(A) Typ. | | | | |
| Frequency: | 2000 ± 500 Hz | | | | |
| Operating Temperature: | -25° ~ +60°C | | | | |
| Lens Color: | Opaque White | | | | |
| Material: | ABS 777D | | | | |
| Mounting Method: | Stainless Steel Pole | | | | |
| Weight Typical (g): | 790 | | | | |
| NEMA 3R,4X, & 12: | | | | | |
| Options: | Please contact factory. | | | | |

## Dimensions: Inches (mm)

**ROHS Compliant**

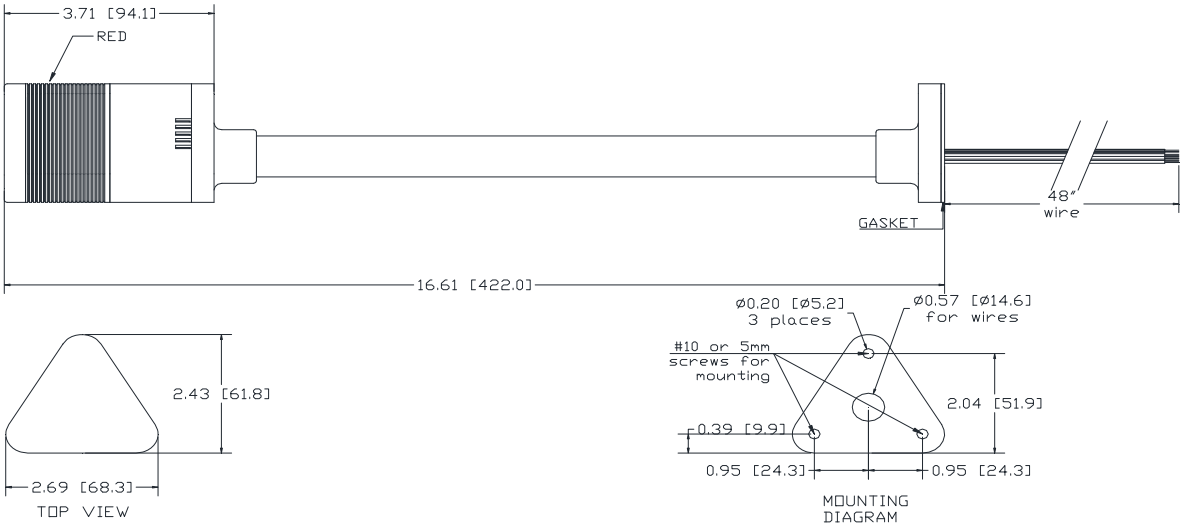


| | |
|---|---|
| LED OPERATION: | CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER. |
| SOUND OPERATION: | CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND. |
| | FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE. |
| | FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE. |
| | FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE. |

4411 South High School Road, Indianapolis, Indiana 46241 U.S.A · Phone: (317) 612-1000 Fax: (317) 612-1010 www.mallory-sonalert.com