


KEMET Part Number: PME261KE6680KR30
(P561EL684K220A)

PME261/P561, Film, Metallized Paper, General Purpose, 0.68 uF, 10%, 400 VDC, 85C, Lead Spacing = 25.4mm

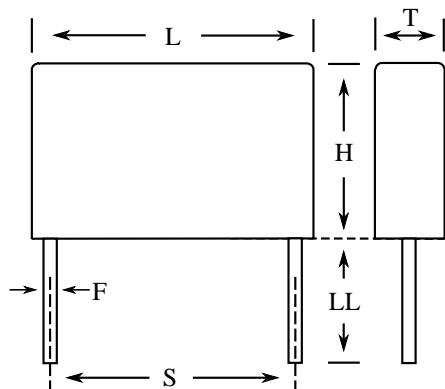

General Information

Supplier:	KEMET
Series:	PME261/P561
Dielectric:	Metallized Paper
Style:	Radial
Features:	Pulse in DC and low frequency applications
RoHS:	Yes
Lead:	Wire Leads
Construction:	Molded
Miscellaneous:	AC Operation: 70C MAX

Dimensions

L	30.5mm MAX
H	22mm MAX
T	15.3mm MAX
S	25.4mm +/-0.4mm
LL	30mm +5mm
F	1mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
Packaging Quantity:	75

Specifications

Capacitance:	0.68 uF
Capacitance Tolerance:	10%
Voltage AC:	220 VAC
Voltage DC:	400 VDC
Temperature Range:	-40/+100C
Rated Temperature:	85C
Dissipation Factor:	1.3% 1kHz
Insulation Resistance:	5.882 GOhms
Max dV/dt:	300 V/us