


Radial Leaded PTC Resettable Fuse

multicomp^{PRO}

RoHS
Compliant



Applications

Wide variety of electronic equipment

Features

- Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 16V DC
- Operation Current from 11A to 14A
- Maximum Voltage 16V DC
- Temperature Range from -40°C to +85°C

Electrical Characteristics (23°C)

Part Number	Hold Current	Trip Current	Max. Time to trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
	I_H , A	I_T , A	at $5 \times I_H$, S	I_{MAX} , A	V_{MAX} , V DC	P_d , W	R_{MIN}	R_{1MAX}
	Ω	Ω						
MC011370	11	18.7	13.5	100	16	3.7	0.003	0.010
MC011371	12	20.4	16	100	16	4.2	0.002	0.009
MC011372	14	23.8	20	100	16	4.6	0.002	0.008

I_H = Hold current-maximum current at which the device will not trip at 23°C still air.

I_T = Trip current-minimum current at which the device will always trip at 23°C still air.

V_{MAX} = Maximum voltage device can withstand without damage at its rated current.

I_{MAX} = Maximum fault current device can withstand without damage at rated voltage (V max).

P_d = Typical power dissipated from device when in the tripped state in 23°C still air environment.

R_{MIN} = Minimum device resistance at 23°C.

R_{1MAX} = Maximum device resistance at 23°C 1 hour after tripping.

Physical Specifications

Lead Material : MC011370 - 16F Tin plated copper, 20 AWG.
MC011371 & MC011372 - 16F Tin plated copper, 18 AWG.

Soldering Characteristics : MIL-STD-202, Method 208E.

Insulating Coating : Flame retardant epoxy, meet UL-94V-0 requirement.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicomp^{PRO}

Radial Leaded PTC Resettable Fuse

Dimensions




Figure 1

Lead Size: 20AWG
Φ0.81mm Diameter





Figure 2

Lead Size: 18AWG
Φ1mm Diameter


Part Number	Figure	A	B	C	D	E	F
		Maximum	Maximum	Typical	Minimum	Maximum	Typical
MC011370	1	17.5	26	5.1	7.6	3	1.2
MC011371	2	17.5	28	10.2	7.6	3.6	1.4
MC011372		27.9	27.9	10.2	7.6	3.6	1.4

Dimensions : Millimetres

Thermal Derating Curve

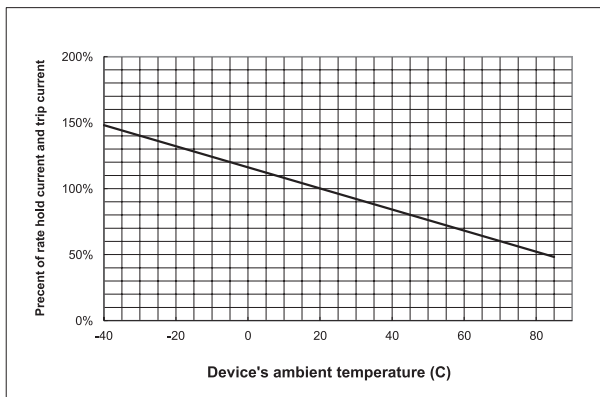

Typical Time-To-Trip at 23°C

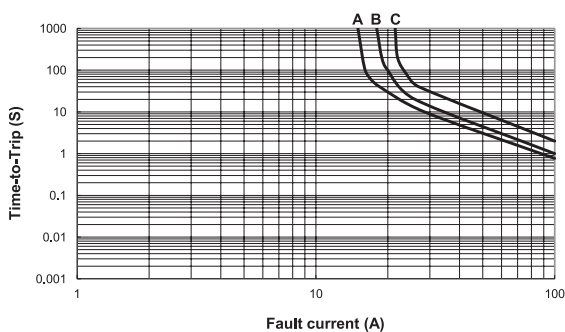

A = MC011370
B = MC011371
C = MC011372

Radial Leaded PTC Resettable Fuse

multicomp PRO

Part Number Table

Description	Part Number
PTC Resettable Fuse, 11A, 16V DC, Through Hole	MC011370
PTC Resettable Fuse, 12A, 16V DC, Through Hole	MC011371
PTC Resettable Fuse, 14A, 16V DC, Through Hole	MC011372

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
Farnell.com/exclusive-brands
Element14.com/exclusive-brands

multicomp PRO