

Mini DisplayPort-to-VGA Adapter **pro-SIGNAL**



Features

- Mini DisplayPort 1.1a compliant receiver offering 5.4 Gbps bandwidth over 2 lanes
- Integrated triple 10-bit, 162 MHz video DAC for analog VGA signal output
- Supports up to 1080p, 1920 × 1200 reduced blanking video resolution
- EDID pass-through from PC source to display
- Spread Spectrum (de-spreading) for EMI reduction
- Automatic sink detection
- Low power standby mode operation initiated based on sink detection status
- Powered from Mini DisplayPort source
- 3.3V IO, 1.2V Core
- Low power operation – Active 400mW, standby mode 15mW

Note: For few display cards, the image would not appear until the PC enters into Windows from DOS at the time of restarting.

Specifications

Signal Inputs/Output

Max. Single Link Range : 1920 × 1200, 1080P

Video Format Supported

VGA : Max to 1920 × 1200

Operating Frequency

Vertical Frequency Range : 50/60Hz

Video Amplifier Bandwidth : 162MHz

Environmental

Operating Temperature : 0°C to +70°C

Operating Humidity : 10% to 85% RH (no condensation)

Storage Temperature : -10°C to +80°C


Storage Humidity : 5% to 90% RH (no condensation)

Mechanical

Weight (Net) : 28g

Mini DisplayPort-to-VGA Adapter pro-SIGNAL

Diagram

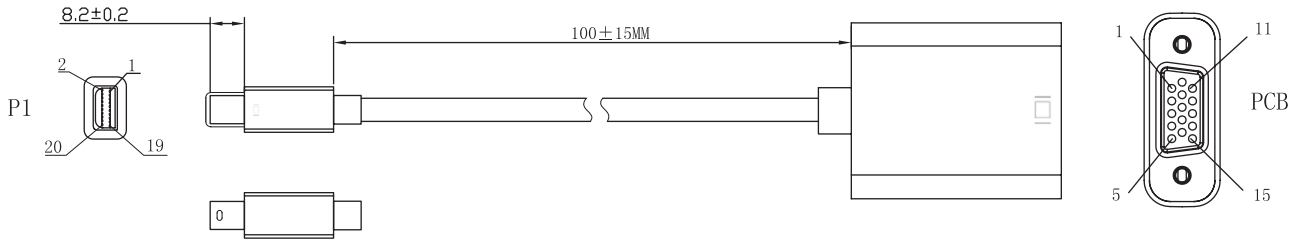

Dimensions : Millimetres

Part Number Table

Description	Part Number
Mini DisplayPort-to-VGA Adapter	MP-V

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-SIGNAL is the registered trademark of the Group. © Premier Farnell Limited 2016.