## multicomp PRO



#### **Specifications**

Dice Material	: GaAlAs
Peak Wave Length	: 660 nm
Emitted Colour	: Super Red
Lens Colour	: White Diffused
IV(mcd)	: 4.2
Surface Ink Colour	: Black


#### Electrical / Optical Characterisitics at TA = 25°C


Parameter	Symbol	Min	Тур	Max	Unit	Test
Luminous Intensity	IV	2	4.2	5.8	mcd	
Viewing Angle	2⊖1/2	-	-	-	deg	
Peak Emission Wavelength	λρ	-	660	-	nm	IF - 20mA
Dominant Wavelength	λD	-	643	-	nm	IF = 20mA
Spectral Line Half-Width	Δλ	-	20	-	nm	
Forward Voltage	VF	1.7	1.85	2.5	V	
Power Dissipation	Pd	-	-	85	mW	
Peak Forward Current (Duty1/10 @ 1kHz)	l⊧ (Peak)	-	-	100	mA	
Recommended Operating Current	TF (Rec)	-	20	-	mA	

#### Absolute Maximum Rating T<sub>A</sub> = 25°C

Reverse Voltage	5 Volt
Reverse Current	10µA (VR=5V)
Operating Temperature Range	-40°C to +85°C
Storage Temperature Range	-40°C to +100°C
Lead Soldering Temperature Range (1.6mm (1/16 inch) from body)	260°C For 5 Seconds

#### **Typical Electro-Optical Characteristics Curves**






Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro



### 14.2mm (0.56") Three Digit Common Cathode LED Display

# multicomp PRO

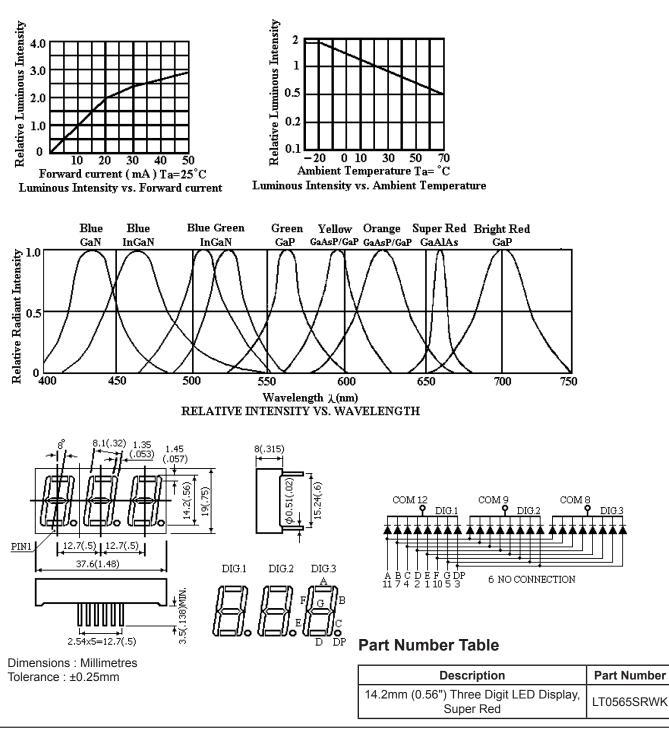

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

