

RG58 BU PVC

50Ω Coaxial Cable, 100m, 50m **multicomp**PRO



Application:

For communication and signal control systems.

Multi-construction 1

Conductor Material	: Tinned copper
Construction	: T0.8 × 1
Conductor Area CSA	: 0.50mm ²
Insulation Material	: Solid PE
Insulation Thickness	: 1.03
Insulation Dia.(+/-0.1mm)	: 2.95
Insulation Colour	: Natural

Shield

Braiding Layer	: Tinned copper
Construction (stranded)	: T0.12 × 112
Braiding coverage(%)	: 94%
Jacket Material	: PVC
Jacket Thickness(mm)	: 0.65
Jacket Dia.(±0.15mm)	: 4.95
Jacket Colour	: Black

Packaging

100m/50m Cardboard Reel

Electrical Characteristics

Max. Conductor DC Resistance at 20°C (Ω/km)	: 38.4
Min. Insulation DC Resistance at 20°C (MΩ×kM)	: >500
Rated Temperature(°C)	: 80
Rated Voltage(V)	: 30
Capacitance(pF/m)	: 100 ±5
Velocity ratio	: 66%
Impedance(Ω)	: 50 ±3


Attenuation at 20°C (dB/100m)	(±8%)
50MHz	10.65
200MHz	22.6
650MHz	42
1,000MHz	67

Flame Retardancy	: IEC 60332-1 UL VW-1
------------------	--------------------------

RG58 BU PVC

50Ω Coaxial Cable, 100m, 50m multicomp^{PRO}

Diagram:

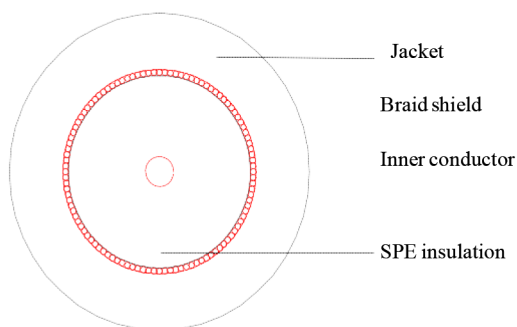

Part Number Table

Description	Part Number
RG58 BU PVC, 50Ω Coaxial Cable, 50m	PP000363
RG58 BU PVC, 50Ω Coaxial Cable, 100m	PP000364

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp^{PRO}