

SPECIFICATION FOR APPROVAL

承認書

Description : **Piezo Siren**

Kingstate Part No. : **KPSM5501-5V**

Customer's Model No. : **DOD-3382**

Specification No. :

Number Of The Edition : **1.5**

CUSTOMER'S APPROVED SIGNATURE		

 **KINGSTATE** 志豐電子股份有限公司 **KINGSTATE ELECTRONICS CORP.**

Address: 10F, No. 69-11, Sec. 2, Chung Cheng E. Rd., Tamshui County, Taipei Hsien, Taiwan, R.O.C.

International sales dept.: TEL:886-2-2809-5651 FAX:886-2-2809-7151

Domestic sales dept.: TEL:886-2-2809-0668 FAX:886-2-28096748

<http://www.kingstate.com.tw>

Approved by	Checked by	Issued by
<i>Jeel 05623'</i>	<i>Jeel 05623'</i>	<i>M d r s 2023.5.26</i>

SPEC SHEET REVISION RECORD

成品承認書修訂記錄

DRAWING NO. : DOD-3382 圖 號: DOD-3382		P/N: KPSM5501-5V 料 號: KPSM5501-5V	
REVISE DATE 修訂日期	APPLICANT 提出者	Version 版次	Revise 修訂記錄內容
2022/05/20	Mars	1.1	1. 製作規格書
2022/11/9	Mars	1.2	1. 新增防水防塵等級
2022/12/13	Mars	1.3	1. 修改外觀尺寸圖
2023/02/13	Mars	1.4	1. 修改規格(頻率、尺寸、重量)
2023/05/25	Mars	1.5	1. 修改外規尺寸圖

Preliminary

A. SCOPE 範疇

This specification applies piezo audio Siren, **KPSM5501-5V**


此規格書適用於壓電式蜂鳴器, **KPSM5501-5V**

B. SPECIFICATION 規格

No.	Item	Unit	Specification	Condition
1	Operating Frequency 操作頻率	KHz	3.2-4.2	
2	Operating Volt. 操作電壓範圍	VDC	3.3-5.5	
3	Rated Voltage 額定電壓	VDC	5	
4	Tone 聲音		Siren	白線不接 The white wire doesn't need to connect to anything
			Pulse of Dual-frequency	白線接負(不可與紅線相接) The white wire should connect with "Ground" (Rad Wire can't connect with White wire)
5	Sound pressure level 輸出音壓	dB	Min 110	At 30 cm/ 5VDC
			Min 100	At 100cm/ 5VDC
6	Current consumption 消耗電流	mA	MAX 120	Measure by FLUKE 87V at 5VDC
7	Operating temp. 操作溫度	°C	-40 ~ +85	
8	Storage temp 儲存溫度	°C	-40 ~ +85	
9	Dimension 尺寸	mm	φ55.0 x H17.8	See appearance drawing 請參照外觀尺寸圖
10	Weight (MAX) 重量	gram	28	
11	Material 材質		PBT+30%Glass UL-94V0 (BLACK)	
12	Terminal 端子		Wire type	
13	Environmental Protection Regulation 環保法規		RoHS 2.0	Piezo electronic device is exempted from RoHS2.0. Lead contain restriction (escape clause 7C-1). 產品符合 RoHS2.0, 但陶瓷面含鉛部分, 屬 RoHS 豁免條款 7C-1.
14	Dustproof and waterproof level 防塵、防水等級		IP67	IEC 60529 Edition 2.2 2013

Core: C2


C. APPEARANCE DRAWING 外觀尺寸圖

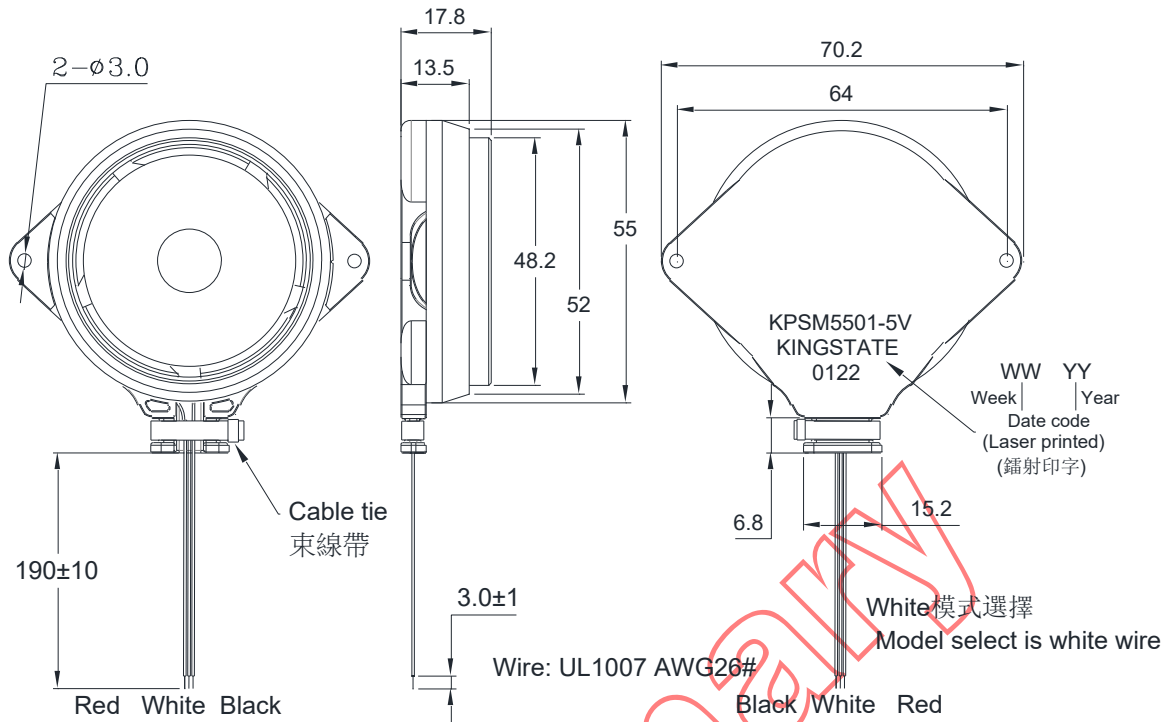

**Tol : ± 0.5
Unit : mm**

D. MEASURING METHOD 測量方法

1. S.P.L. Measuring Circuit 音壓測試接線圖

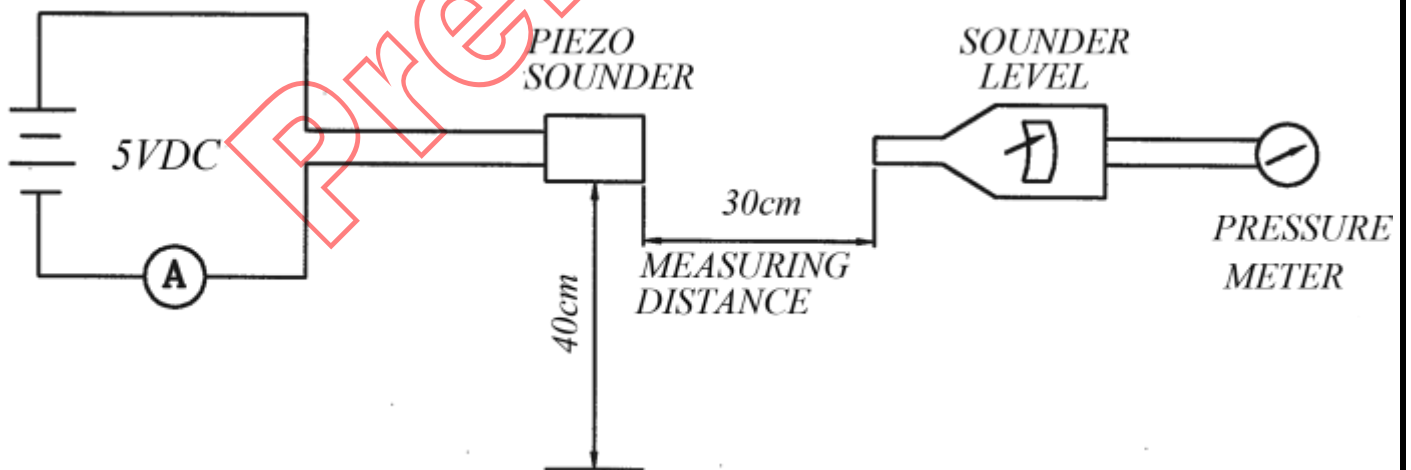


Mic : RION S.P.L. meter UC30 or equivalent
Mic : RION 噪音計 UC30 或同等品


E. VOLTAGE: SOUND PRESSURE LEVEL / VOLTAGE: CURRENT CONSUMPTION

CHARACTERISTICS 電壓與音壓/電壓與耗電流之特性

1.Siren Mode

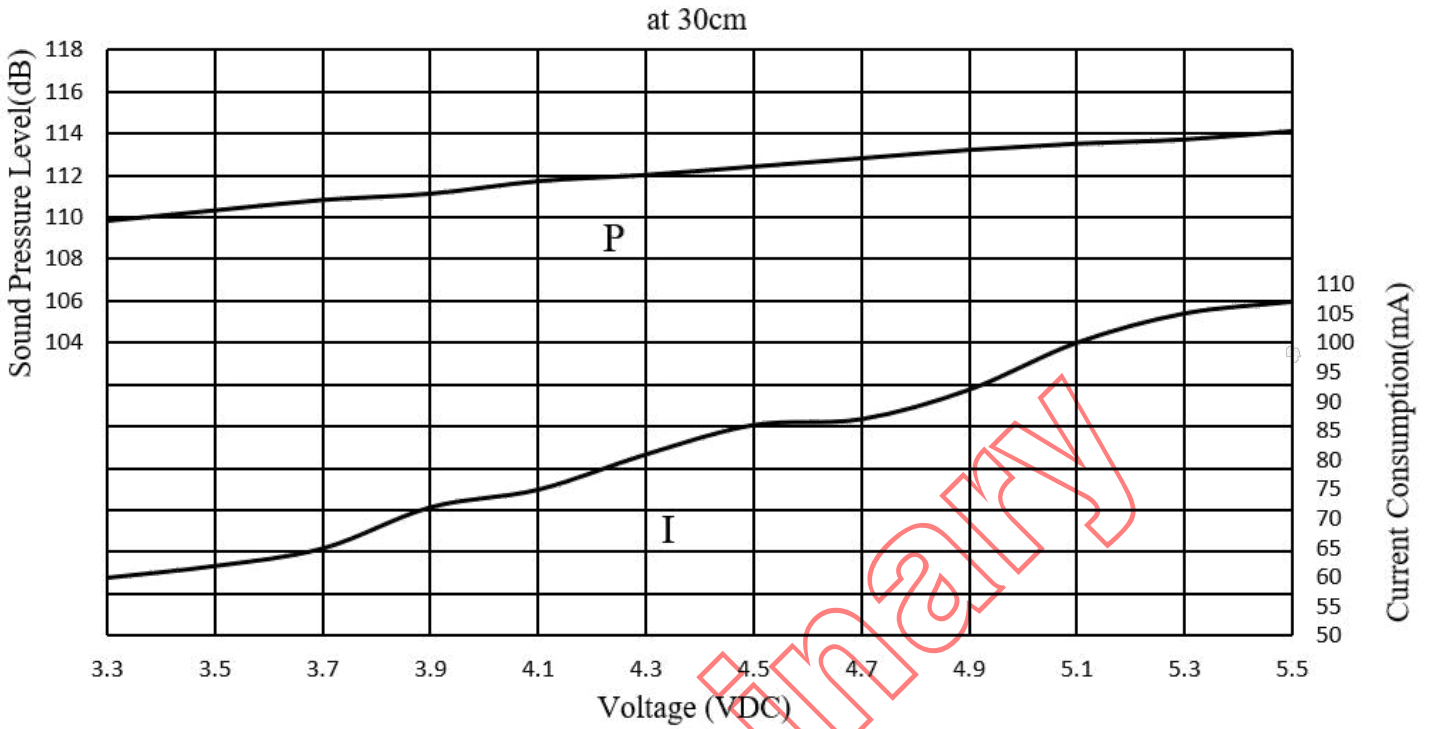


2.Pulse Mode

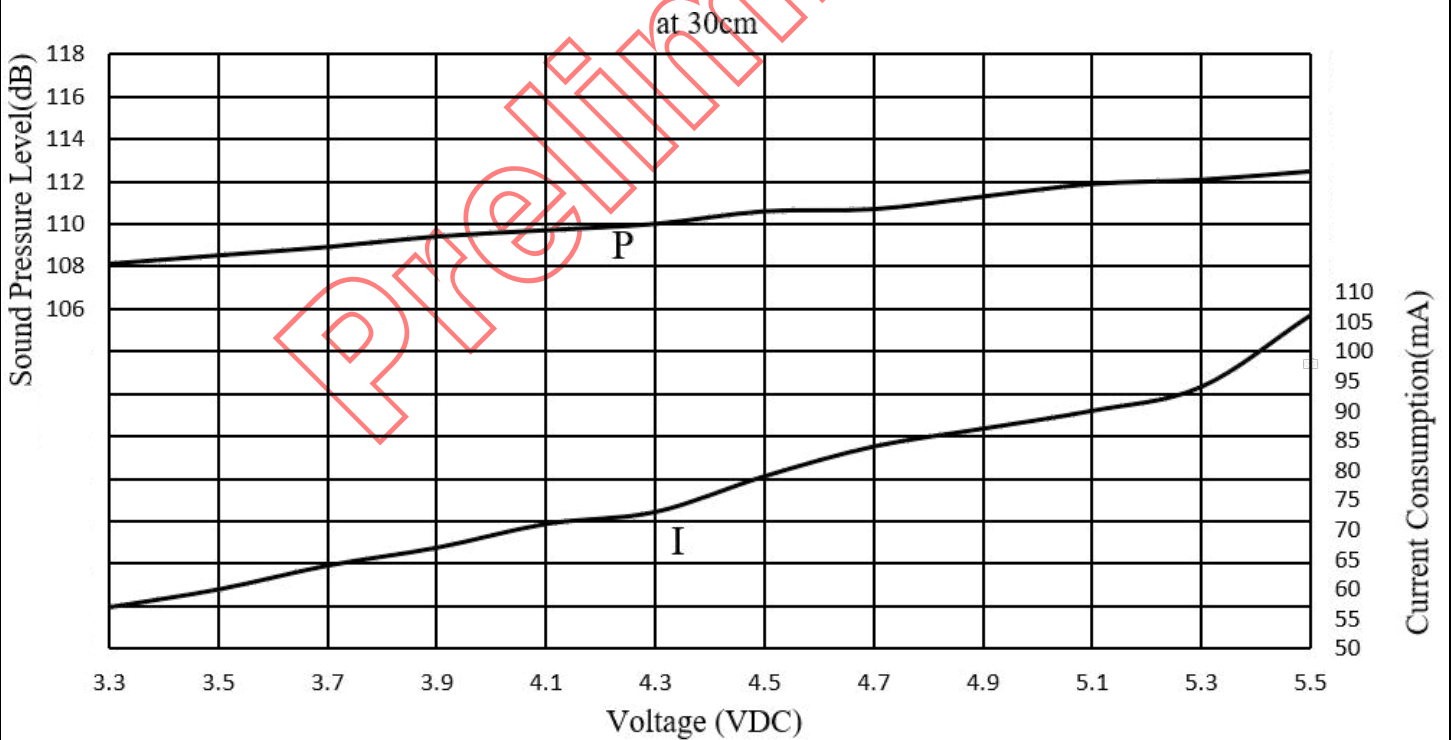

F. MECHANICAL CHARACTERISTICS 機械特性

No.	Item	Test Condition	Evaluation standard
1	Solderability 焊錫附着性	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of $+270\pm 5^{\circ}\text{C}$ for 3 ± 1 seconds. 端子部份浸入松香溶液 5 秒後,再浸入 $+270\pm 5^{\circ}\text{C}$ 熔融焊錫槽中 3 ± 1 秒。	90% min. lead terminals shall be wet with solder. (Except the edge of terminal) 浸入端子部份附着焊錫 90%以上。(末端斷面不算)
2	Soldering Heat Resistance 焊錫耐熱性	Lead terminal are immersed up to 1.5mm from solder's body in solder bath of $+300\pm 5^{\circ}\text{C}$ for 3 ± 0.5 seconds or $+260\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds. 距離端子根部 1.5mm 的位置,浸入 $+300\pm 5^{\circ}\text{C}$ 的焊錫槽 3 ± 0.5 秒,或 $+260\pm 5^{\circ}\text{C}$ 的焊錫槽 10 ± 1 秒。	No interference in operation 操作無任何不良。
3	Terminal Mechanical Strength 端子強度	The force 10 seconds of 9.8N (1.0kg) is applied to each terminal in axial direction. 各端子的軸方向施以 9.8N (1.0kg) 的力量 10 秒。	No damage and cutting off 端子不鬆動,不脫落。
4	Vibration 振動試驗	Buzzer shall be measured after being applied vibration of amplitude of 1.5mm with 10 to 55hz band of vibration frequency to each of 3 perpendicular directions for 2 hours. 振動週波數 10~55HZ、全振幅 1.5mm 於 X.Y.Z 3 個方向,各 2 小時。	The value of oscillation frequency/ current consumption should be in 10% compared with initial ones. The SPL should be in $\pm 10\text{dB}$ compared with initial one.
5	Drop test 落下測試	The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times). 單體從 75 公分高處, X.Y.Z.3 個方向,各 3 回,落於 40mm 厚木板上。	諧振頻率與消耗電流變化量須在 $\pm 10\%$ 內。輸出音壓變化量須在 $\pm 10\text{dB}$ 內。

G. ENVIRONMENT TEST 環境測試

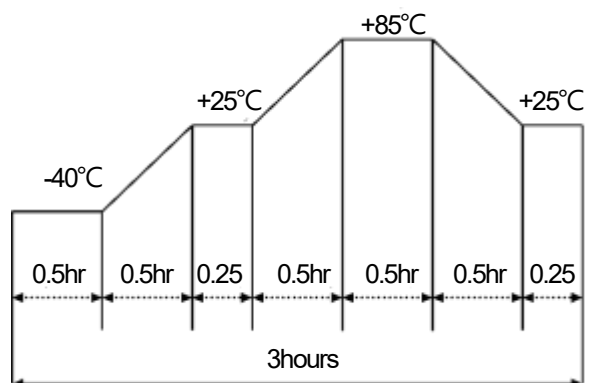No.	Item	Test Condition	Evaluation standard
1	High temp. test 高溫測試	After being placed in a chamber at $+85^{\circ}\text{C}$ for 240 hours 置於 $+85^{\circ}\text{C}$ 環境中 240 小時	Being placed for 4 hours at $+25^{\circ}\text{C}$, buzzer shall be measured. The value of oscillation frequency/ current consumption should be in $\pm 10\%$ compared with initial ones. The SPL should be in $\pm 10\text{dB}$ compared with initial one. 經測試後,靜置於 $+25^{\circ}\text{C}$ (室溫)環境中 4 小時後,諧振頻率與消耗電流變化量須在 $\pm 10\%$ 內。輸出音壓變化量須在 $\pm 10\text{dB}$ 內。
2	Low temp. test 低溫測試	After being placed in a chamber at -30°C for 240 hours 置於 -30°C 環境中 240 小時	
3	Humidity test 相對濕度測試	After being placed in a chamber at $+40^{\circ}\text{C}$ and $60\pm 5\%$ relative humidity for 240 hours 置於 $+40^{\circ}\text{C}$ 、相對濕度 $60\pm 5\%$ 環境中 240 小時	
4	Temp. cycle test 溫度循環試驗	The part shall be subjected to 5 cycles. One cycle shall be consist of: 單體承受溫度循環測試 5 次,其循環內容如圖示: 	

H. RELIABILITY TEST 信賴性測試

No.	Item	Test condition	Evaluation standard
1	Operating life test 壽命測試	<p>1. Continuous life test 高溫壽命測試(連續) 48 hours continuous operation at +55°C with rated voltage applied. 在+55°C環境下,以額定電壓連續操作 48 小時</p> <p>2. Intermittent life test 室溫壽命測試(間歇) A duty cycle of 1 minute on, 1 minutes off, a minimum of 5000 times at room temp.(+25±2°C)and rated voltage applied 在室溫下(+25±2°C), 以額定電壓操作, 通電 1 分鐘/斷電 1 分鐘,測試 5000 次循環.</p>	<p>Being placed for 4 hours at +25°C, buzzer shall be measured. The value of oscillation frequency/ current consumption should be in ±10% compared with initial ones .The SPL should be in ±10dB compared with initial one. 經測試後, 靜置於+25°C (室溫) 環境中 4 小時後,諧振頻率與消耗電流變化量須在±10%內. 輸出音壓變化量須在±10dB 內.</p>


TEST CONDITION.

Standard Test Condition	:	a) Temperature : +5 ~ +35°C	b) Humidity : 45-70%	c) Pressure : 860-1060mbar
一般測試條件	:	a) 溫度 : +5 ~ +35°C	b) 濕度 : 45-70%	c) 氣壓 : 860-1060mbar
Judgement Test Condition	:	a) Temperature : +25 ± 2°C	b) Humidity : 60-70%	c) Pressure : 860-1060mbar
爭議時測試條件	:	a) 溫度 : +25 ± 2°C	b) 濕度 : 60-70%	c) 氣壓 : 860-1060mbar


I.PACKING STANDARD 包裝規格

Each minimum package unit of products shall be in a carton box and it shall be clearly marked with Part Number, quantity and outgoing inspection number. There shall be no mechanical damage on products during transportation and/or in storage.

外箱須標示最小包裝單位，並註明產品型號、數量及檢驗批號，必須是物品儲藏或運輸過程中可防止造成損傷的包裝。

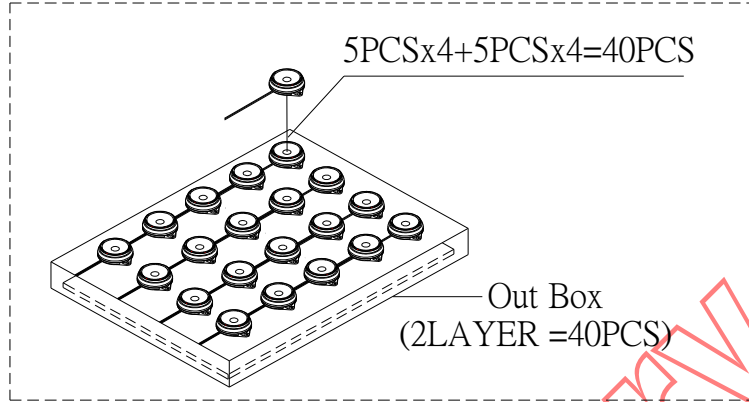

Lot No.	XXXXXXXXXX
Part No.	XXXXXXXXXX
Quantity	XXXX Pcs
Date:	
WWYY	HSF

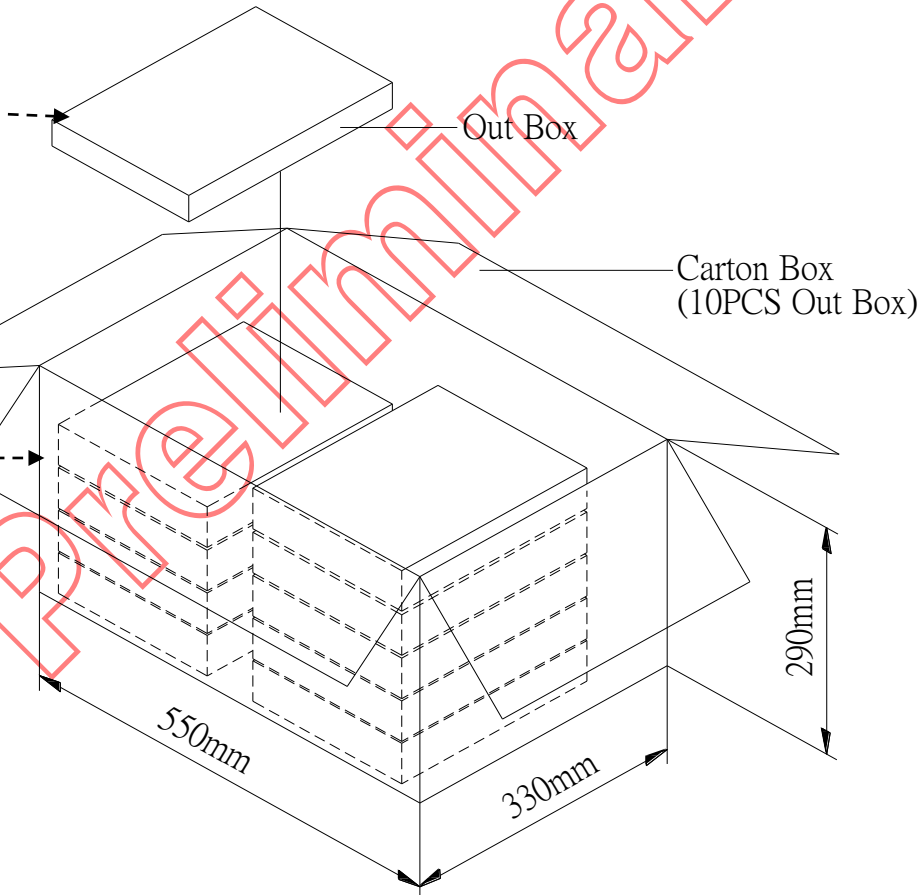

* The label sticked on inner boxes and the outer of carton.

Out Box	310mmx248mmx49mm	2x20PCS=40PCS
Carton Box	550mmx330mmx290mm	40PCSx10=400PCS